


PE-65535NL




NOTICE: THE INFORMATION AND DESIGN CONTAINED HEREIN IS THE PROPERTY OF PULSE WHO RESERVES ALL RIGHTS THERETO.

TEST NOTES:

1. TURNS RATIO 1 V 10 KHz (100%) .
 $\frac{(4-5)}{(1-3)} = \frac{(5-6)}{(1-3)} = 1.0 \pm 2\%$
2. INDUCTANCE 20 KHz 0.02 V (100%)
 $(1-3) = 20 \text{ mH MIN}$
3. LEAKAGE INDUCTANCE 100 KHz 0.02 V (SAMPLE)
 $(4-6) \text{ WITH } (1-3) \text{ SHORT} = 5.0 \text{ uH MAX}$
4. COUPLING CAPACITY 100 KHz 0.02 V (SAMPLE)
 $(4-6) \text{ TO } (1-3) = 130 \text{ pF MAX}$
5. DC RESISTANCE (SAMPLE)
 $(1-3) = 2.65 \text{ OHM MAX}$
 $(4-6) = 5.00 \text{ OHM MAX}$
6. HIPOT (100%)
 $(1-3) \text{ TO } (4-6) = 1500 \text{ VRMS 1 MINUTE}$
 $(1650 \text{ VRMS 6 SEC})$



SCHMATIC

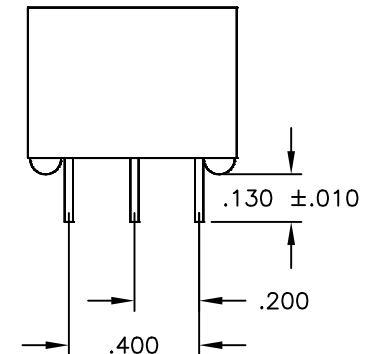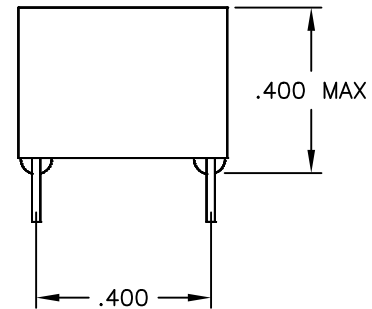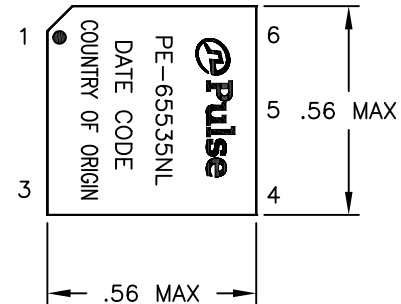

FINAL OUTLINE

FIG.3

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES TOLERANCES ARE:
 DECIMALS .XX ±.01 .XXX ±.005
 ANGLES ± 1°
 DO NOT SCALE DRAWING

SIZE	CAGE CODE	DWG. NO.	REV
B01961		PE-65535NL	12
SCALE	CADD FILE	SHEET	
NONE		4 OF 4	