


COIL: @ 25°C	
RESISTANCE	100 OHMS \pm 10%
NOMINAL VOLTAGE	5.0 VDC
MUST OPERATE	2.6 VDC
MUST RELEASE	0.23 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE 4.0 MS MAX.
 RELEASE 7.5 MS MAX.
 CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET

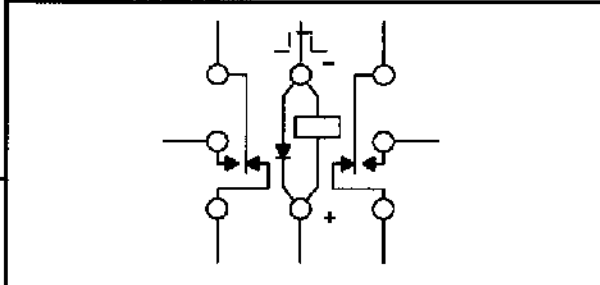

CONTACT RATING: LOW LEVEL TO 1 AMP
 28 VDC RESISTIVE 100,000 OPERATIONS MIN.

DR. R.B. 5/1/98 *ck 5/1/98*

COMMUNICATIONS INSTRUMENTS, INC.

CUST. C. I. I. STD.
 CUST. NO.

TYPE SMGSD RELAY

SMGSD-5