

REV. 2


DCO 141865

COIL: @ 25°C	
RESISTANCE	1350 OHMS ± 10%
NOMINAL VOLTAGE	20.0-35.0 VDC (26.5)
MUST OPERATE	13.5 VDC
MUST RELEASE	8.1 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:

VIBRATION	10	CPS TO	3000	CPS @	30	g's
SHOCK	100	g's	11	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		
NOTES:	OPERATE & RELEASE 4 MS MAX.					
	BOUNCE 1.5 MS MAX.					
	DIELECTRIC 500 VAC - ALL POINTS					

CUSTOMER DATA SHEET

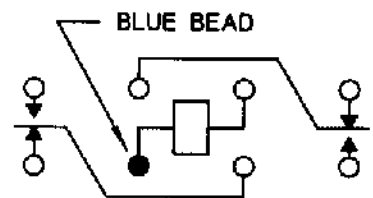

TERMINAL VIEW

CONTACT RATING:	2A 28VDC RES.,
	0.5A 28VDC IND. L/R .008 MAX., 0.5A
	115VAC CASE UNGROUNDED, .125A 115VAC
	CASE GROUNDED RES., 100,000 OPS

DR. R.B. 10/4/96

CK 3/7/00

COMMUNICATIONS INSTRUMENTS, INC.

CUST. C.I.I. STD.
CUST. NO. _____ REV. _____

'3SBC' RELAY

3SBC5004K1