
Strain relief housing; for female and male connectors; 2 parts; Pin spacing 3.81 mm; 5-pole; orange



www.wago.com/734-635

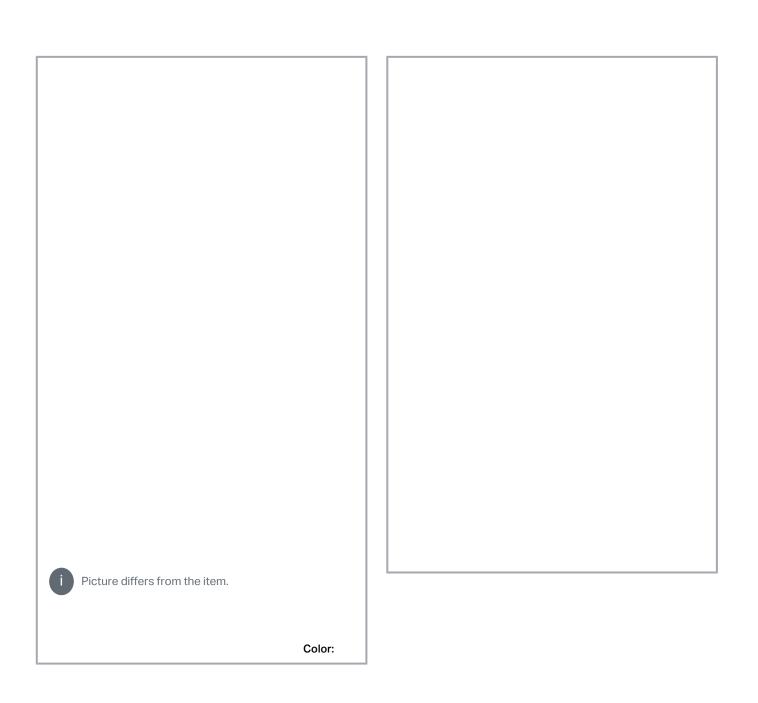

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

Data sheet   Item number: 734-635 www.wago.com/734-635	<b>V/</b> 460
Item description  Only for use with cable binders	
Cable binder width: max. 3.6 mm  1 x cable outlet, rear	
Data Connection data	

## **Connection 1**

Pole number 5

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/734-635



## Physical data

Pin spacing	3.81 mm / 0.15 inches
Width	22 mm / 0.866 inches
Height	14.4 mm / 0.567 inches
Depth	32.7 mm / 1.287 inches

### **Mechanical Data**

Suitable for standard male and female connectors

#### **Material Data**

Note (material data)

Information on material specifications can be found here

Color	orange
Material group	1
Insulation material	Polyamide (PA66)
Flammability class per UL94	VO
Fire load	0.1 MJ
Weight	2 g

#### Commercial data

Product Group	3 (Multi Conn. System)
eCl@ss 10.0	27-44-04-92
eCl@ss 9.0	27-44-04-92
ETIM 8.0	EC002848
ETIM 7.0	EC002848
PU (SPU)	25 pcs
Packaging type	box
Country of origin	DE
GTIN	4017332593458
Customs tariff number	39269097900

# **Environmental Product Compliance**

RoHS Compliance Status Compliant, No Exemption

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/734-635



## Approvals / Certificates

General	l approval	s
---------	------------	---

Logo	Approval	Additional Approval Text	Certificate name
	CB DEKRA Certification B.V.	EN 61984	NL-54190
	KEMA/KEUR DEKRA Certification B.V.	EN 61984	71- 105522

### Approvals for marine applications

Logo	Approval	Additional Approval Text	Certificate name
	DNV GL  Det Norske Veritas, Germanischer Lloyd	-	TAE000016Z
	LR	IEC 61984	96/20035
	Lloyds Register		(E5)

# Downloads Documentation

Additional Information

2019 年4月3日	pdf	Download
	2.0 MB	

#### CAD/CAE-Data

CAE data

EPLAN Data Portal 734-635	URL	Download
---------------------------	-----	----------

# **Environmental Product Compliance**

Compliance Search

Environmental Product Compliance 734-635 URL Download
Strain relief housing; for female and male connectors; 2 parts; Pin spacing 3.81 mm; 5pole; orange

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.


www.wago.com/734-635



### **Installation Notes**

Application
I-pole, 1-conductor female connector, with
ocking levers and strain relief housing (2- to 5-

pole strain relief housing suitable only for cable ties)



8-pole; 1-conductor male connector; with strain relief housing (6- to 12-pole strain relief housings suitable for cable clamp)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.