


REV	ECRN	DATE
1	NEW PRODUCTION	20190322

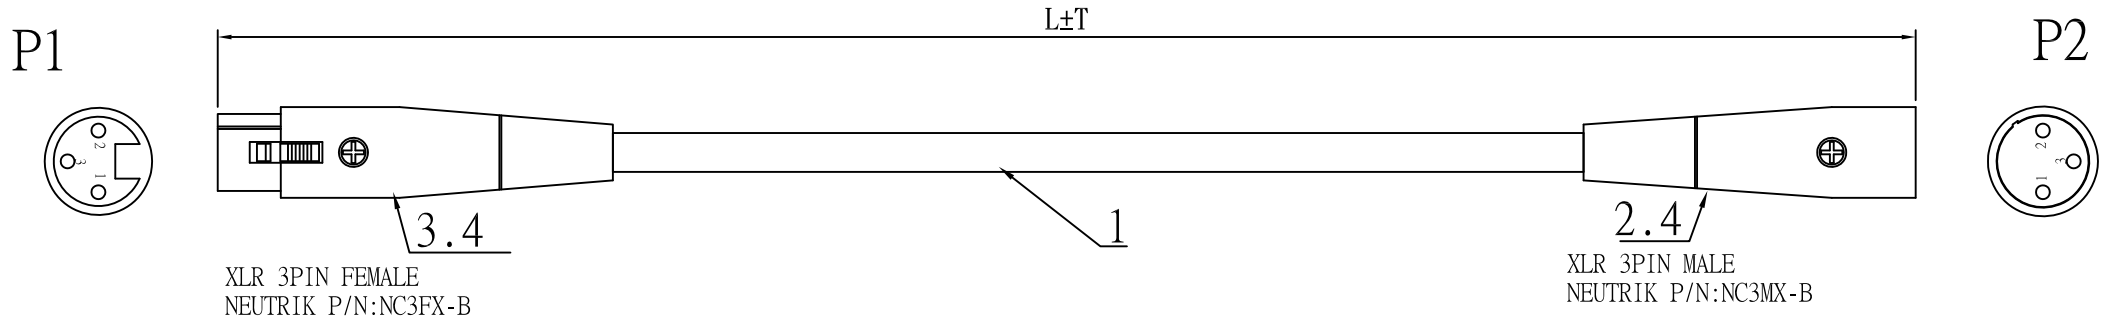

P/N	L(mm)	T(mm)	裁线长度(mm)	朋联料号
	1520(5F)	30	1520	9.00ACCA2468.015R
	3050(10FT)	30	3050	9.00ACCA2468.030R
	7620(25FT)	50	7620	9.00ACCA2468.076R

NOTES:
 1. ELECTRICAL TEST: 100% OPEN, SHORT & MIS WIRE TEST.
 2. CONDUCTOR RESISTANCE: 2ohm,
 3. INSULATOR RESISTANCE: 5M ohm.
 4. HIGH VOLTAGE: DC 300V 0.01sec.
 5. MUST BE ROHS COMPLIANT.

接线表

P1	P2
1	1
2	2
3	3

④		TIN WIRE	TIN WIRE OD:0.8MM	1.5	G
③		CONNECTOR	XLR 3PIN FEMALE NEUTRIK P/N:NC3FX-B	1	PCS
②		CONNECTOR	XLR 3PIN MALE NEUTRIK P/N:NC3MX-B	1	PCS
①		CABLE	24AWG(11/0.16TC)*2C(RED WHITE.)+B(96/0.10) JACKET:BLACK 100P PVC OD:4.5±0.15mm	1	PCS
NO.	PART NO	ITEM	DESCRIPTION	Q' TY	UNIT

RoHS COMPLIANT			朋联电子有限公司 DongGuan PengLian Electronics Co.,Ltd TEL:076938835098/38835095 FAX:076938835091			
DRAWN BY		谢建军	20190322	比例: FREE	TITLE: 卡侬头公对母	
CHECKED BY				单位: mm	SUPPLIER`S ITEM: 9.00ACCA2468.XXXR	
APPROVED BY					CUSTOMER: SPARK FUN	
					CUSTOMER`S ITEM:	
				DRAWING NO.	ACCA-2468	DATE 2019.03.22