

## Control Cabinet Keys

for all standard cabinets and shut-off systems


00  
11

- > for control cabinets and shut-off systems in the supply of gas, water and electricity
- > for technical installations in buildings, e.g. air conditioning and ventilation systems, shut-off valves, main switchboards, etc.
- > with bit insert: slot 3/64 x 9/32" (1.0 x 7 mm) and cross recess PH2
- > with adapter for 1/4" bits on securing chain
- > additional bit adapter for 1/4" bits in one arm
- > zinc die-casting



**00 11 02**  
Short execution, total length 1 3/4" (44 mm)

**00 11 03**  
Long execution, total length 3" (76 mm);  
additional square of 13/64" (5 mm)

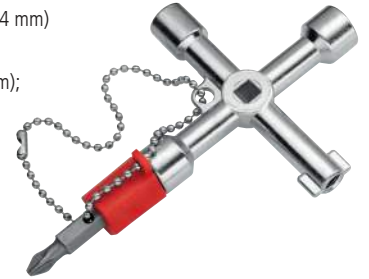

00 11 03

Product Number	Packaging	↔ Inch mm	□ Inch mm	□ Inch mm	□ Inch mm	⚖ lbs
00 11 02	X	1 3/4 44	15/64, 5/16 6 / 8	23/64 9	1/8 - 13/64 3 - 5	0.11
00 11 03	X	3 76	13/64, 15/64, 5/16 5 / 6 / 8	23/64 9	1/8 - 13/64 3 - 5	0.17

## Profi-Key

for all standard shut-off systems

00  
11

- > key for heating, air conditioning, sanitary and building engineering, e.g. for door and window handles or for air bleeding heaters
- > with bit insert: slot 3/64 x 9/32" (1.0 x 7 mm) and cross recess PH2
- > with adapter for 1/4" bits on securing chain
- > additional bit adapter for 1/4" bits in one arm
- > total length: 3 1/2" (90 mm)
- > zinc die-casting



00 11 04

Product Number	Packaging	↔ Inch mm	□ Inch mm	□ Inch mm	□ Inch mm	⚖ lbs
00 11 04	X	3 1/2 90	13/64, 9/32, 5/16 5 / 7 / 8	23/64 - 25/64 9 - 10	15/64, 9/32, 5/16, 23/64 6 / 7 / 8 / 9	0.16