


DisplayPort AOC P/N	OVERALL LENGTH, L (m)
1064135001	1
1064135003	3
1064135005	5
1064135010	10
1064135020	20
1064135030	30
1064135050	50
1064135100	100

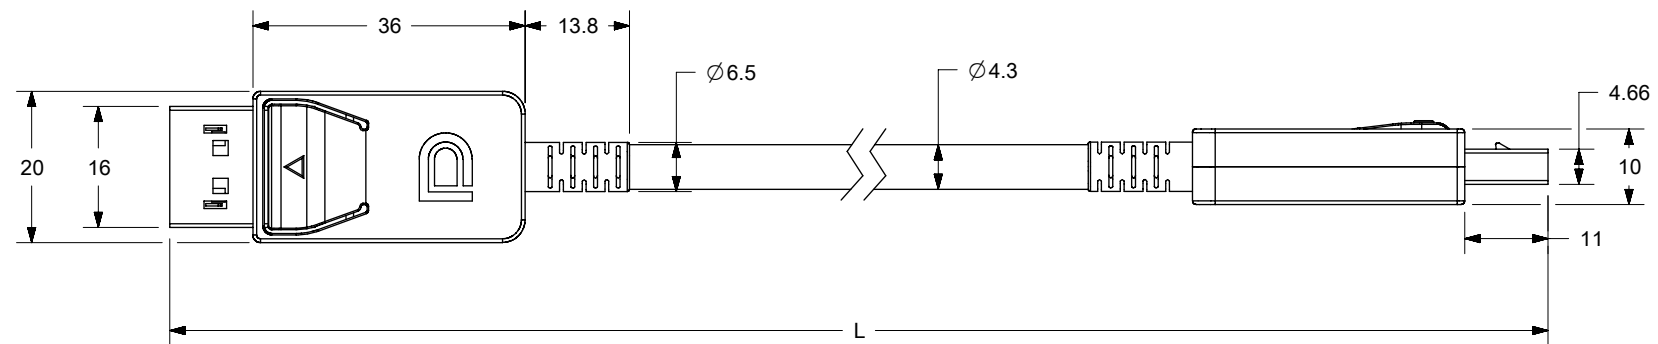

- NOTES:
- SUPPORTS DisplayPort 1.4 SPECIFICATION.
  - MATERIAL:  
 BACKSHELL - FROSTING PLASTIC SHELL (ABS + PC)  
 CABLE - BLACK, FIRE RETARDANT PVC, INCLUDE 7X AWG26 COPPER WIRES AND 4X MULTIMODE FIBERS (50/125  $\mu$ m, OM2), KEVLAR FILLS AND THE TENSION CAN REACH 200 N
  - STANDARD DP HOOK CONNECTOR.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
SYMBOLS	DIMENSION UNITS	SCALE	CURRENT REV DESC:												
	$\nabla = 0$	mm	1:1	<p><b>molex</b></p> <p>DISPLAYPORT 1.4 ACTIVE OPTICAL CABLE</p> <p>PRODUCT CUSTOMER DRAWING</p> <p>DOCUMENT NUMBER: 1064135001    DOC TYPE: PSD    DOC PART: 000    REVISION: A</p>											
$\nabla = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)														
$\nabla = 0$	ANGULAR TOL $\pm$ °														
$\nabla = 0$	4 PLACES	$\pm$													
$\nabla = 0$	3 PLACES	$\pm$													
$\nabla = 0$	2 PLACES	$\pm$													
$\nabla = 0$	1 PLACE	$\pm$													
$\nabla = 0$	0 PLACES	$\pm$													
$\nabla = 0$	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION							DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER	
$\nabla = 0$										A-SIZE	106413	SEE TABLE		1 OF 1	