
S20F1C-P09MCC0-200S


series_f, type_s2



General information

Part number	S20F1C-P09MCC0-200S	
Termination	solder	
Size	0	
Locking principle	push	C-C-IIII. ES
Coding	1_halfshell	
Cable Diameter	cable_mini_20	
Cable outlet	bend_relief	



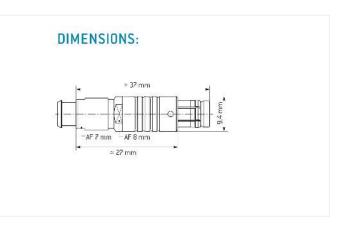

Contact insert description

9
pins
05mm
peek
28_awg
solder
04mm

reverse_gender_on_request

Technical information

Max. creepage and air clearance distance	06_mm	05_mm
Nominal current single contact	04_a	iec_60512_5_2
Nominal current insert	2,6 A	vde_0298_4
Test voltage	06_kv_ac	sae_13441

safety_text

Mechanical and environmental data

Degree of protection*	ip50
Operating temperature	40_120_c
Mating cycles	5000

mated_unmated

Material and surface treatments

Housing	m_chrome
Contact	cu_alloy_gold

safety_text_2 ul_text illustrative_text