THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-. .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
GP	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REVISED PER ECO-11-003736	17MAR2011	CJV	SLB

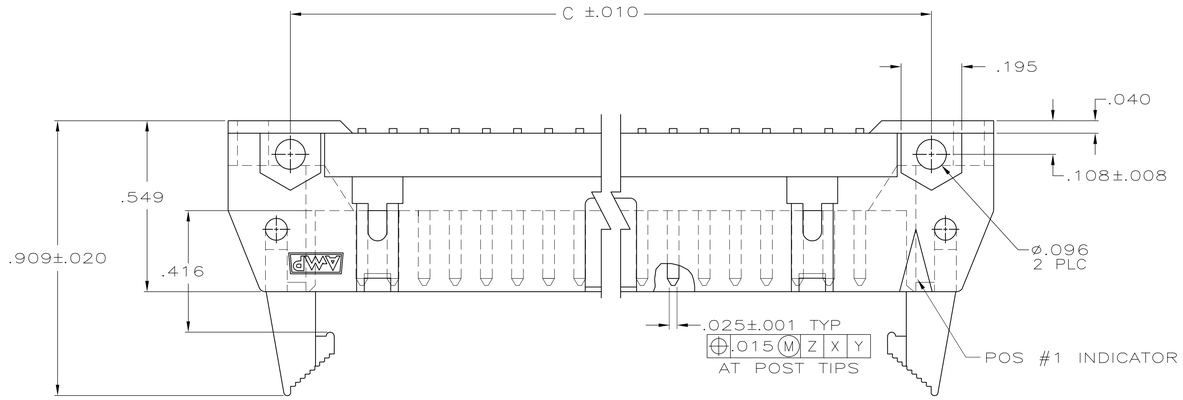

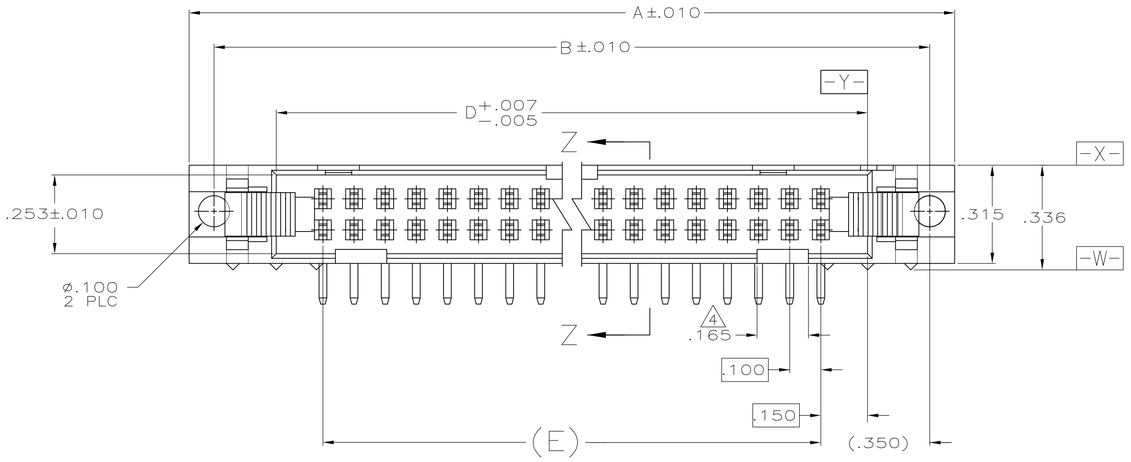

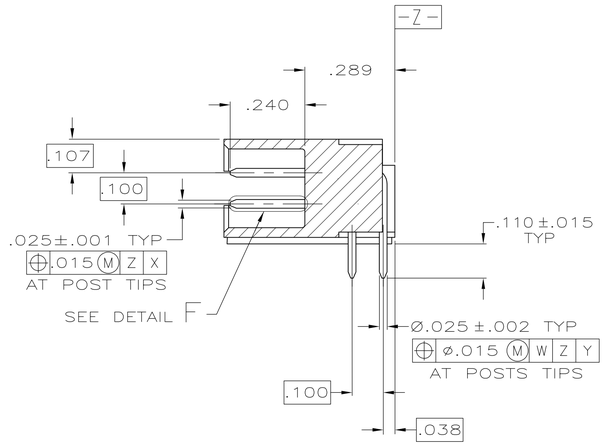

SECTION Z−Z

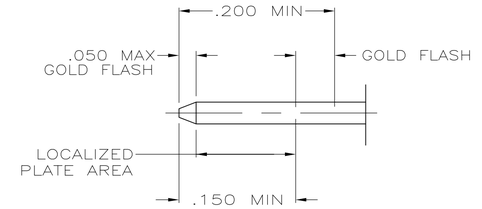

DETAIL F
SCALE 10:1

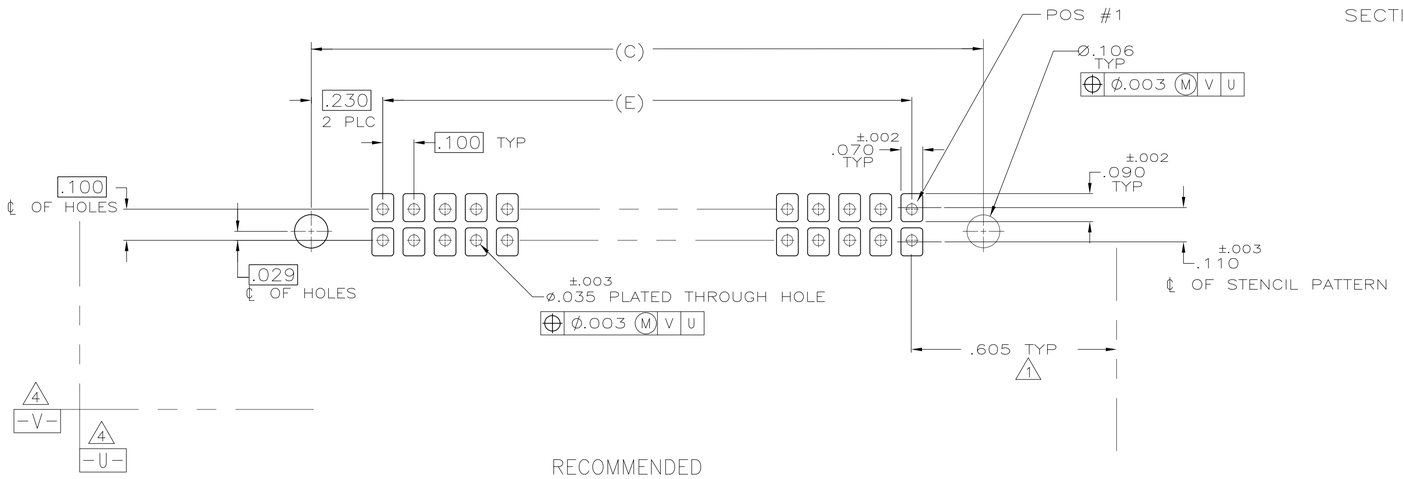

RECOMMENDED
PCB MOUNTING DIMENSIONS

1. DISTANCE REQUIRED BY LATCHES IN OPEN POSITION.
2. POSTS: GOLD FLASH OVER .000030 MIN PALLADIUM–NICKEL PLATE ON THE LOCALIZED PLATE AREA, .000100 MIN TIN PLATE ON THE SOLDER–TAIL, .000050 MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
   –OR–
   .000030 MIN GOLD PLATE ON THE LOCALIZED PLATE AREA, .000100 MIN TIN PLATE ON THE SOLDER–TAIL, .000050 MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
3. MOLDED PARTS: FLAME RETARDANT PCT, UL94V–0 RATED, COLOR RED.
   POSTS: BRASS.
4. DATUMS -V- & -U- TO BE ESTABLISHED BY CUSTOMER

E	D	C	B	A	NO OF POSN	PART NUMBER
2.400	2.700	2.860	3.100	3.260	50	1-5111377-0
1.900	2.200	2.360	2.600	2.760	40	5111377-9
1.400	1.700	1.860	2.100	2.260	30	5111377-7
1.100	1.400	1.560	1.800	1.960	24	5111377-5

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± .005
4 PLC ± –
ANGLES ± –

MATERIAL 3
FINISH 2

DWN G. ATTADIA – DOCK5 01-11-05
CHK S. BOLASH 01-11-05
APVD M. WALMSLEY 01-11-05
PRODUCT SPEC 108-40018
APPLICATION SPEC –
WEIGHT –

TE Connectivity

NAME HEADER ASSEMBLY, HIGH TEMPERATURE, UNIVERSAL, LATCHES, AMP-LATCH

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-5111377	–

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV D