

REV. 1 8/13/98

COIL: @ 25°C	
RESISTANCE	1560 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	14.2 VDC
MUST RELEASE	8.0 VDC MAX, 1.37 VDC MIN


ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES:	OPERATE TIME 2.0 MS MAX.
	RELEASE TIME 1.5 MS MAX.
	CONTACT BOUNCE 1.5 MS MAX.

CUST.	C. I. I.
CUST. NO.	COTS STD.

TYPE PRMA RELAY

CUSTOMER DATA SHEET

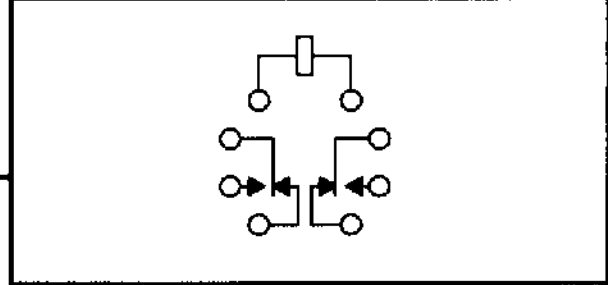

CONTACT RATING:	LOW LEVEL TO 1A
	28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 7/10/98 CK. 3/13/98



PRMAC-26X