

**MSCMC120AM07CT6LIAG**

**Datasheet**

**Very Low Stray Inductance Phase Leg SiC MOSFET Power  
Module**

Final

May 2018



## Contents

---

<b>1</b>	<b>Revision History</b>	<b>1</b>
1.1	Revision A	1
<b>2</b>	<b>Product Overview</b>	<b>2</b>
2.1	Features	2
2.2	Benefits	2
2.3	Applications	2
<b>3</b>	<b>Electrical Specifications</b>	<b>3</b>
3.1	Absolute Maximum Ratings	3
3.2	Electrical Performance	4
3.3	Typical Performance Curves	7
<b>4</b>	<b>Package Specification</b>	<b>12</b>
4.1	Package Outline Drawing	12

# 1 Revision History


---

The revision history describes the changes that were implemented in the document. The changes are listed by revision, starting with the most current publication.

## 1.1 Revision A

Revision A was published in May 2018. It is the first publication of this document.

## 2 Product Overview

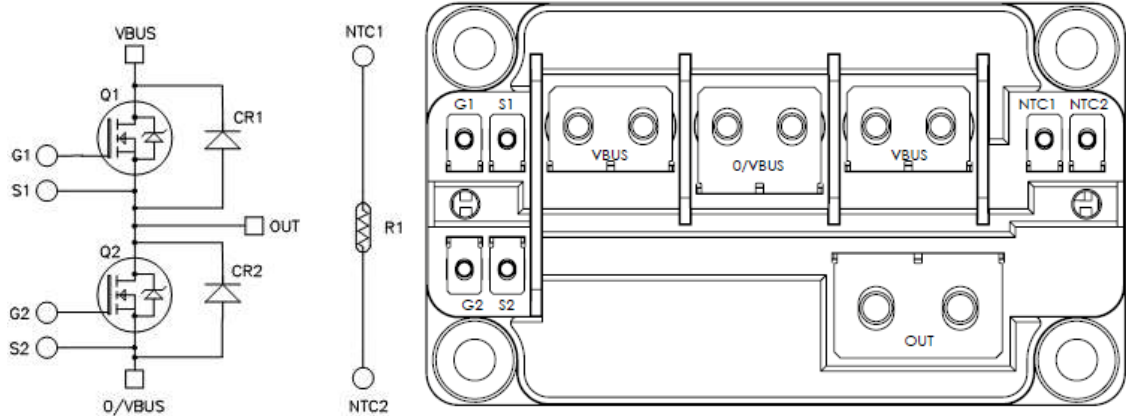

### 2.1 Features

The following are key features of the MSCMC120AM07CT6LIAG device:

- Very low stray inductance
- Internal thermistor for temperature monitoring
- M4 and M5 power connectors
- M2.5 signals connectors
- AlN substrate for improved thermal performance

#### SiC Power MOSFET

- Low  $R_{DS(on)}$
- High temperature performance

#### SiC Schottky Diode

- Zero reverse recovery
- Zero forward recovery
- Temperature independent switching behavior
- Positive temperature coefficient on VF

### 2.2 Benefits

The following are benefits of the MSCMC120AM07CT6LIAG device:

- Outstanding performance at high frequency operation
- Direct mounting to heatsink (isolated package)
- Low junction to case thermal resistance
- Low profile
- RoHS compliant

### 2.3 Applications

The MSCMC120AM07CT6LIAG device is designed for the following applications:

- Motor control

\*All ratings taken at  $T_J = 25\text{ }^\circ\text{C}$  unless otherwise specified.

Caution: The devices are sensitive to electrostatic discharge. Proper handling precautions should be followed.

### 3 Electrical Specifications

This section details the electrical specifications for the MSCMC120AM07CT6LIAG device.

#### 3.1 Absolute Maximum Ratings

The following table shows the SiC MOSFET absolute maximum ratings (per SiC MOSFET) for the MSCMC120AM07CT6LIAG device.

**Table 1 • Absolute Maximum Ratings**

Symbol	Parameter		Ratings	Unit
V <sub>DSS</sub>	Drain- source voltage		1200	V
I <sub>D</sub>	Continuous drain current	T <sub>c</sub> = 25 °C	264	A
		T <sub>c</sub> = 80 °C	210	
I <sub>DM</sub>	Pulsed drain current		530	
V <sub>GS</sub>	Gate- source voltage		-10 to 23	V
V <sub>GSOP</sub>	Gate- source voltage; recommended operation values		-5 to 18	
R <sub>DS(on)</sub>	Drain- source ON resistance		8.7	mΩ
P <sub>D</sub>	Power dissipation	T <sub>c</sub> = 25 °C	1350	W

## 3.2 Electrical Performance

The following tables show the SiC MOSFET characteristics (per SiC MOSFET) of the MSCMC120AM07CT6LIAG device.

**Table 2 • Electrical Characteristics**

Symbol	Characteristic	Test Conditions	Min	Typ	Max	Unit
$I_{DSS}$	Zero gate voltage drain current	$V_{GS} = 0\text{ V}$ , $V_{DS} = 1200\text{ V}$		50	600	$\mu\text{A}$
$R_{DS(on)}$	Drain- source on resistance	$V_{GS} = 20\text{ V}$ ; $I_D = 240\text{ A}$		6.7	8.7	$\text{m}\Omega$
		$V_{GS} = 18\text{ V}$ ; $I_D = 240\text{ A}$	$T_J = 25\text{ }^\circ\text{C}$	15		
$V_{GS(th)}$	Gate threshold voltage	$V_{GS} = V_{DS}$ , $I_D = 60\text{ mA}$	2	2.6	4	V
$I_{GSS}$	Gate- source leakage current	$V_{GS} = 20\text{ V}$ , $V_{DS} = 0\text{ V}$			1.5	$\mu\text{A}$

**Table 3 • Dynamic Characteristics**

Symbol	Characteristic	Test conditions	Min	Typ	Max	Unit
$C_{iss}$	Input capacitance	$V_{GS} = 0\text{ V}$		11.4		nF
$C_{oss}$	Output capacitance	$V_{DS} = 1000\text{ V}$		0.9		
$C_{riss}$	Reverse transfer capacitance	$f = 1\text{ MHz}$		0.06		
$Q_g$	Total gate charge	$V_{GS} = -5\text{ to }20\text{ V}$		690		nC
$Q_{gs}$	Gate – source charge	$V_{Bus} = 800\text{ V}$		168		
$Q_{gd}$	Gate – drain charge	$I_D = 240\text{ A}$		222		
$T_{d(on)}$	Turn-on delay time	$V_{GS} = -5\text{ to }20\text{ V}$		21		ns
$T_r$	Rise time	$V_{Bus} = 600\text{ V}$		19		
$T_{d(off)}$	Turn-off delay time	$I_D = 240\text{ A}$		50		
$T_f$	Fall time	$R_L = 2.5\ \Omega$ ; $R_G = 0.75\ \Omega$		30		
$E_{on}$	Turn on energy	Inductive Switching		3		
$E_{off}$	Turn off energy	$V_{GS} = -5\text{ to }20\text{ V}$	$T_J = 150\text{ }^\circ\text{C}$	2		mJ
		$V_{Bus} = 600\text{ V}$	$T_J = 150\text{ }^\circ\text{C}$			
		$I_D = 200\text{ A}$				
		$R_G = 0.75\ \Omega$				
$R_{gint}$	Internal gate resistance			1		$\Omega$
$R_{thjc}$	Junction-to-case thermal resistance				0.111	$^\circ\text{C/W}$

**Table 4 • Body Diode Ratings and Characteristics**

Symbol	Characteristic	Test conditions	Min	Typ	Max	Unit
$V_{SD}$	Diode forward voltage	$V_{GS} = -5\text{ V}$	$T_J = 25\text{ }^\circ\text{C}$	4.1		V
		$I_{SD} = 120\text{ A}$	$T_J = 175\text{ }^\circ\text{C}$	3.5		
$t_{rr}$	Reverse recovery time	$I_{SD} = 120\text{ A}$ ; $V_{GS} = -5\text{ V}$		54		ns

Symbol	Characteristic	Test conditions	Min	Typ	Max	Unit
$Q_{rr}$	Reverse recovery charge	$V_R = 800\text{ V}$ ; $di_f/dt = 6000\text{ A}/\mu\text{s}$		1.7		$\mu\text{C}$
$I_{rr}$	Reverse recovery current			90		A

The following table shows the SiC diode characteristics (per SiC diode) of the MSCMC120AM07CT6LIAG device.

**Table 5 • SiC Diode Characteristics**

Symbol	Characteristics	Test conditions	Min	Typ	Max	Unit	
$V_{RRM}$	Peak repetitive reverse voltage				1200	V	
$I_{RM}$	Reverse leakage current	$V_R = 1200\text{ V}$		$T_J = 25\text{ }^\circ\text{C}$ $T_J = 175\text{ }^\circ\text{C}$	0.2 0.4	1.2 2.4	mA
$I_F$	DC forward current			$T_c = 95\text{ }^\circ\text{C}$	120	A	
$V_F$	Diode forward voltage	$I_F = 120\text{ A}$		$T_J = 25\text{ }^\circ\text{C}$ $T_J = 175\text{ }^\circ\text{C}$	1.5 2.2	1.8 3	V
$Q_C$	Total capacitive charge	$V_R = 800\text{ V}$			594	nC	
$C$	Total capacitance	$f = 1\text{ MHz}$ , $V_R = 400\text{ V}$ $f = 1\text{ MHz}$ , $V_R = 800\text{ V}$			558 402	pF	
$R_{thJC}$	Junction-to-case thermal resistance				0.214	$^\circ\text{C}/\text{W}$	

The following tables show the thermal and package characteristics of the MSCMC120AM07CT6LIAG device.

**Table 6 • Package Characteristics**

Symbol	Characteristic	Min	Max	Unit		
$V_{ISOL}$	RMS isolation voltage, any terminal to case $t = 1\text{ min}$ , 50 to 60 Hz	4000		V		
$T_J$	Operating junction temperature range	-40	175	$^\circ\text{C}$		
$T_{JOP}$	Recommended junction temperature under switching conditions	-40	$T_{Jmax} - 25$			
$T_{STG}$	Storage temperature range	-40	125			
$T_C$	Operating case temperature	-40	125			
Torque	Mounting torque	For terminals	M2.5	0.4	0.6	N.m
			M4	2	3	
			M5	2	3.5	
			To heatsink	M6	3	
$L_{DC}$	Module stray inductance between VBUS and 0/VBUS		3	nH		
Wt	Package weight		320	g		

**Table 7 • Temperature Sensor NTC**

Symbol	Characteristic	Min	Typ	Max	Unit
R <sub>25</sub>	Resistance at 25 °C		50		kΩ
ΔR <sub>25</sub> /R <sub>25</sub>			5		%
B <sub>25/85</sub>	T <sub>25</sub> = 298.15 K		3952		K
ΔB/B	T <sub>c</sub> = 100 °C		4		%

**Note:** See application note APT0406 on [www.microsemi.com](http://www.microsemi.com)

**Figure 1 • NTC Formula**

$$R_T = \frac{R_{25}}{\exp\left[B_{25/85}\left(\frac{1}{T_{25}} - \frac{1}{T}\right)\right]}$$



### 3.3 Typical Performance Curves

This section shows the typical performance curves for the MSCMC120AM07CT6LIAG device.

The following section details the typical performance curves for SiC MOSFET.

Figure 2 • Maximum Thermal Impedance

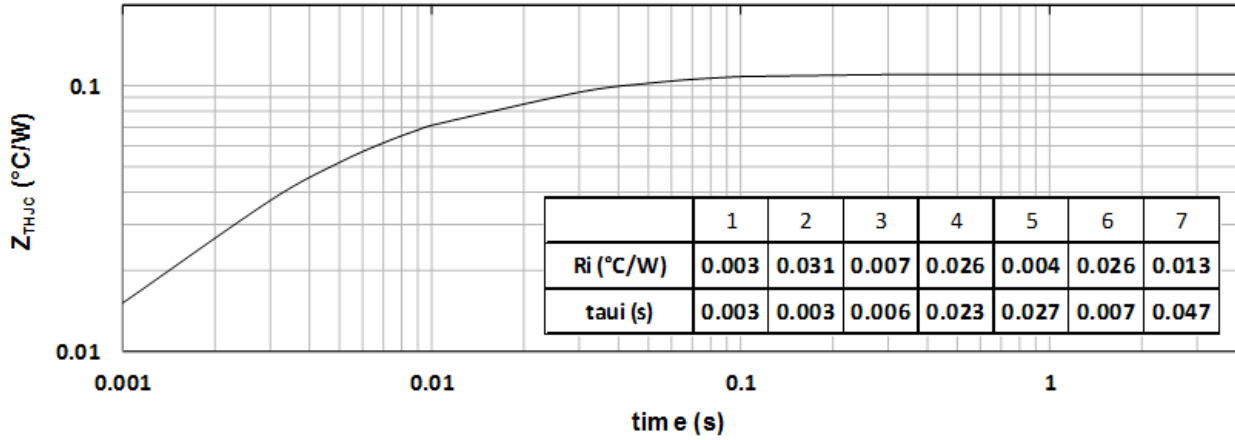


Figure 3 • Output Characteristics

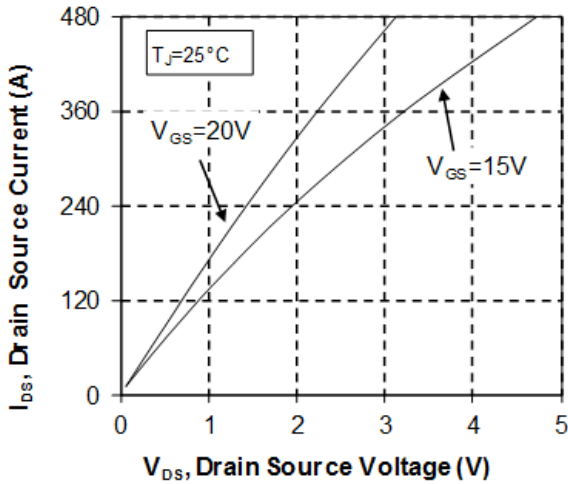


Figure 4 • Output Characteristics II

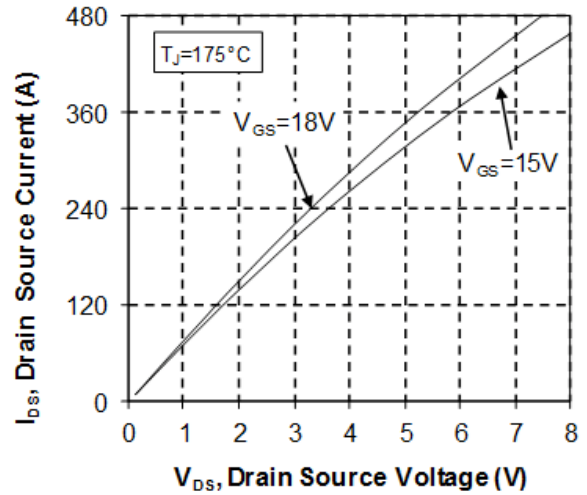


Figure 5 • Normalized  $R_{ds(on)}$  vs. Temperature

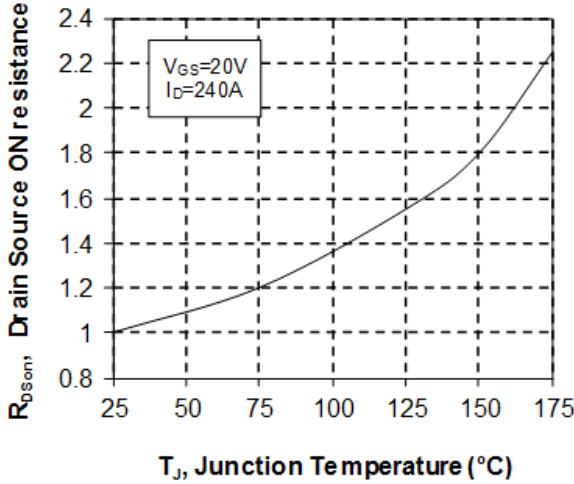


Figure 6 • Transfer Characteristics

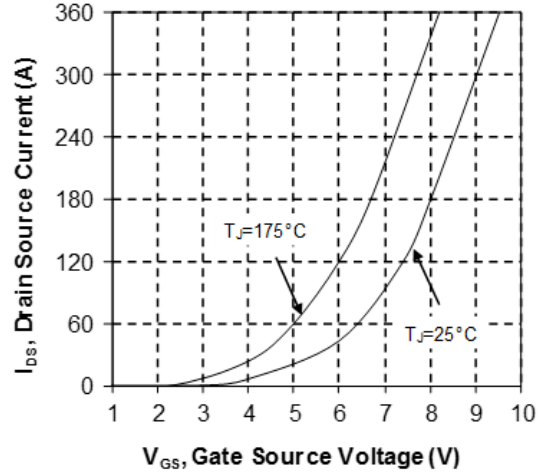


Figure 7 • Switching Energy vs.  $R_g$

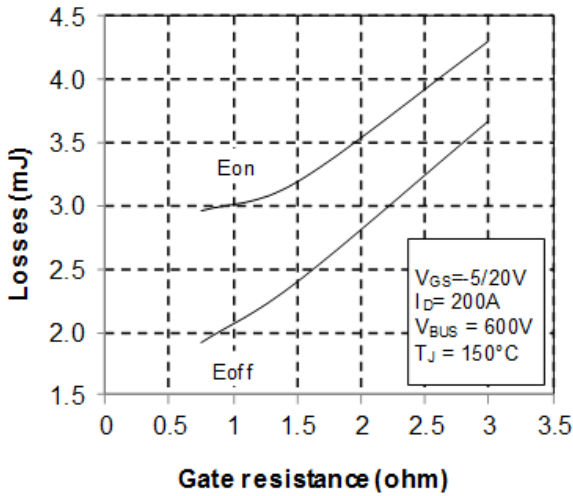


Figure 8 • Switching Energy vs. Current

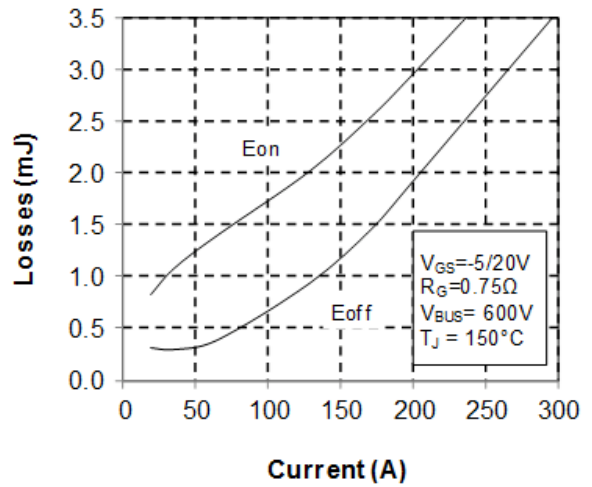


Figure 9 • Capacitance vs. Drain Source Voltage

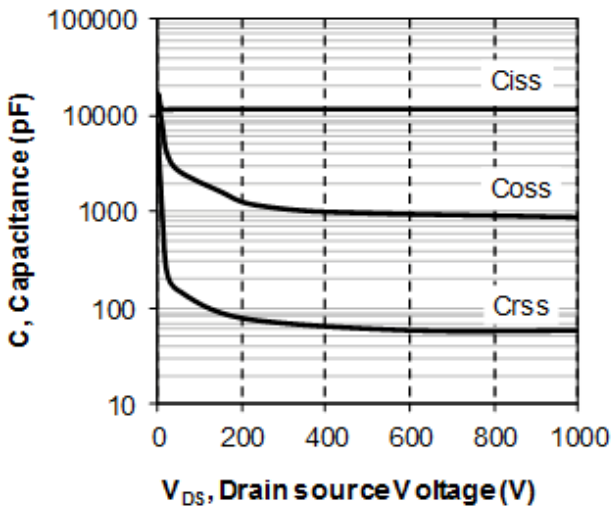


Figure 10 • Gate Charge vs. Gate Source Voltage

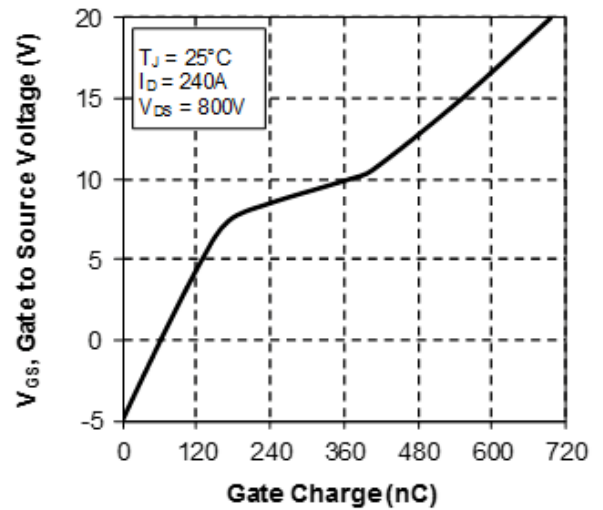


Figure 11 • Body Diode Characteristics

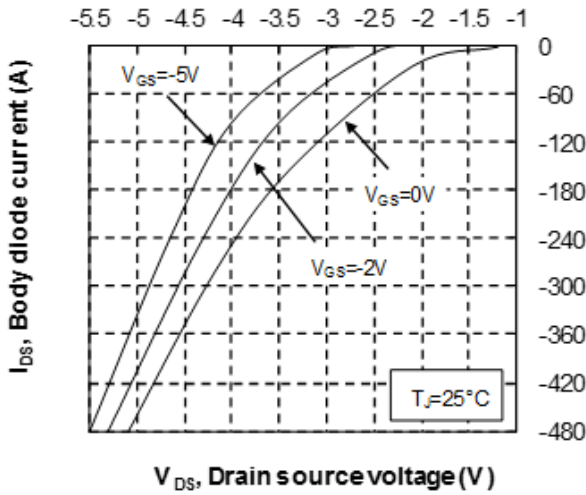


Figure 12 • 3rd Quadrant Characteristics

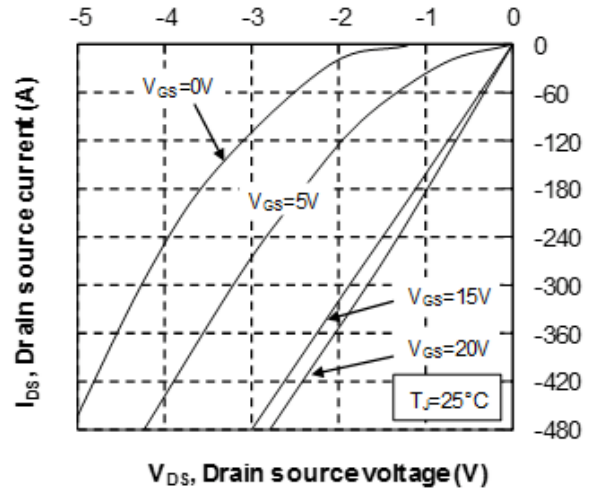


Figure 13 • Body Diode Characteristics II

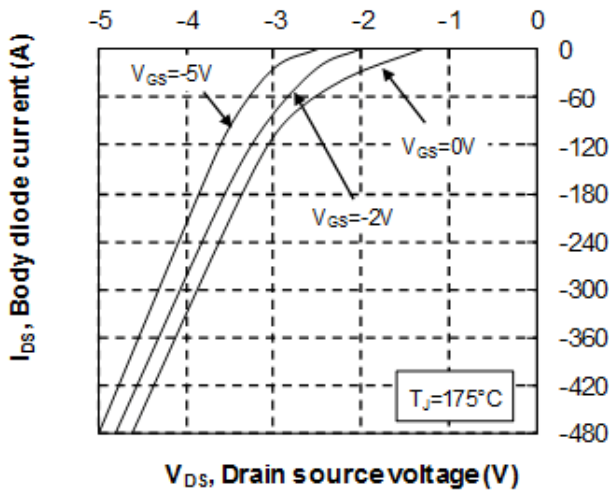


Figure 14 • 3rd Quadrant Characteristics



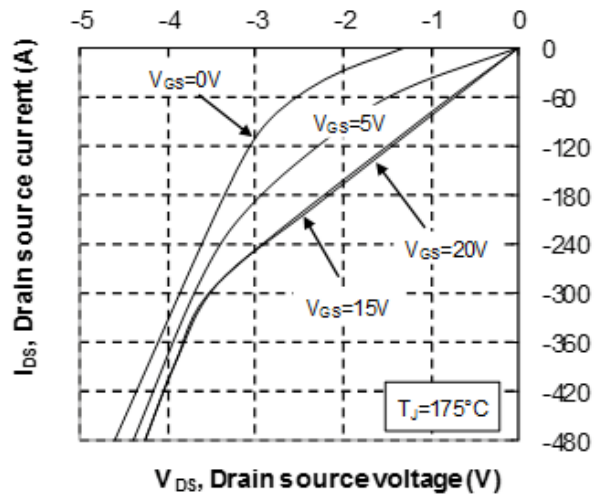


Figure 15 • Operating Frequency vs. Drain Current

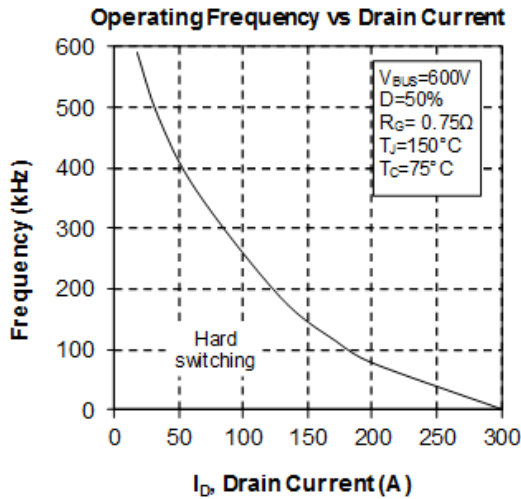


The following section details the typical performance curves for SiC Diode.


**Figure 16 • SiC Diode Maximum Thermal Impedance**

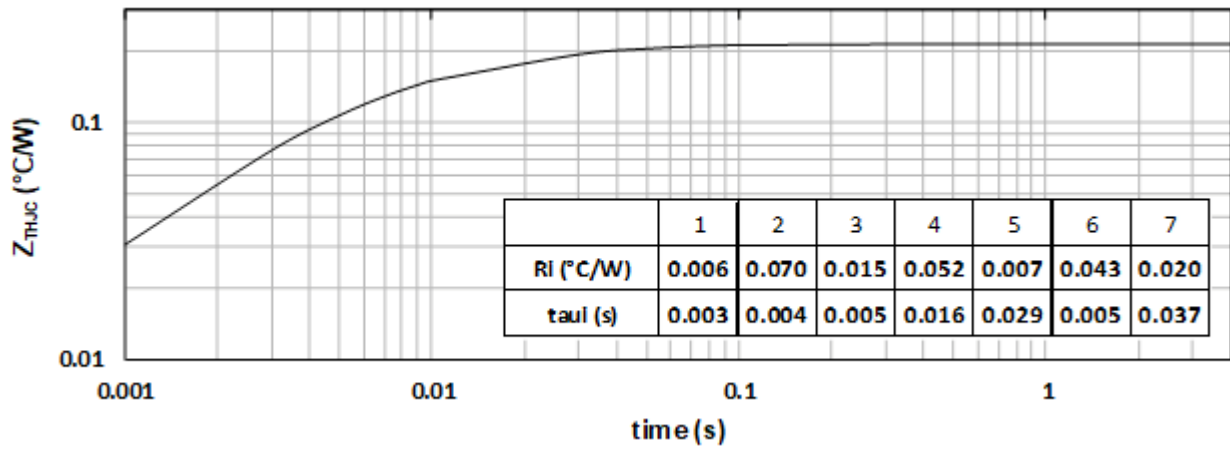


**Figure 17 • Forward Characteristics**

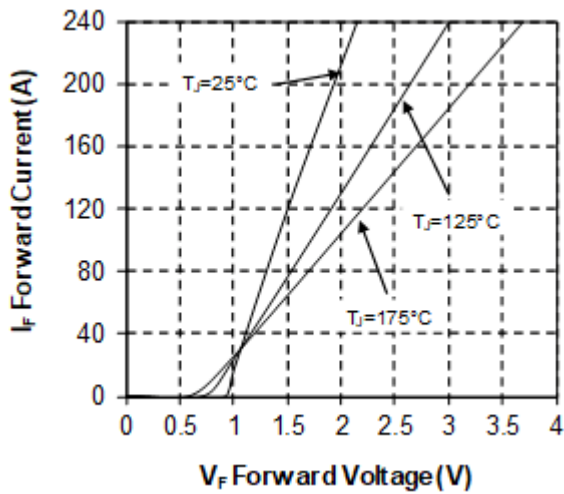

**Figure 18 • Reverse Characteristics**

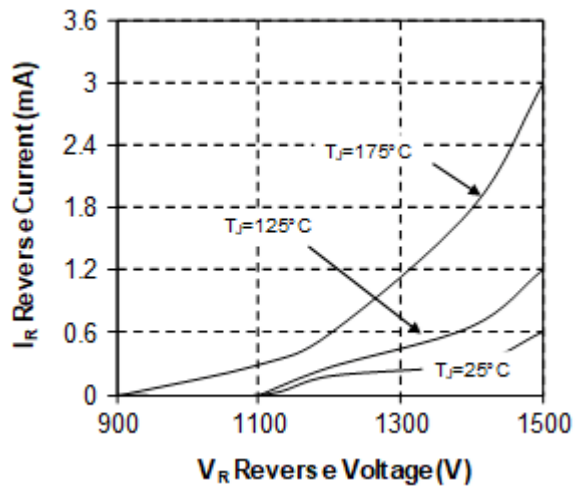

**Figure 19 • Capacitance vs. Reverse Voltage**

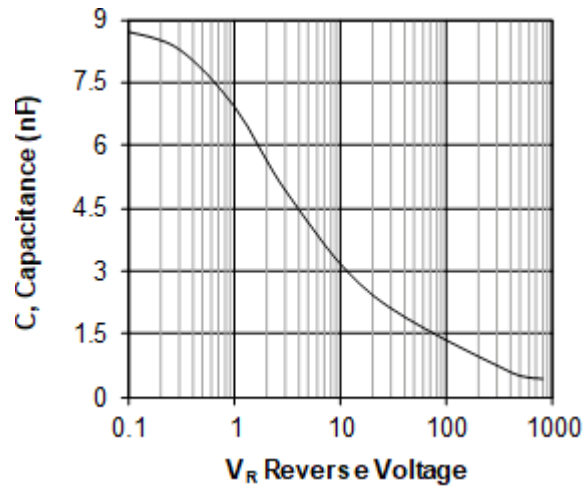


## 4 Package Specification

This section outlines the package specification for the MSCMC120AM07CT6LIAG device.

### 4.1 Package Outline Drawing

This section details the package drawing of the MSCMC120AM07CT6LIAG device. Dimensions are in millimeters.

Figure 20 • Package Outline Drawing

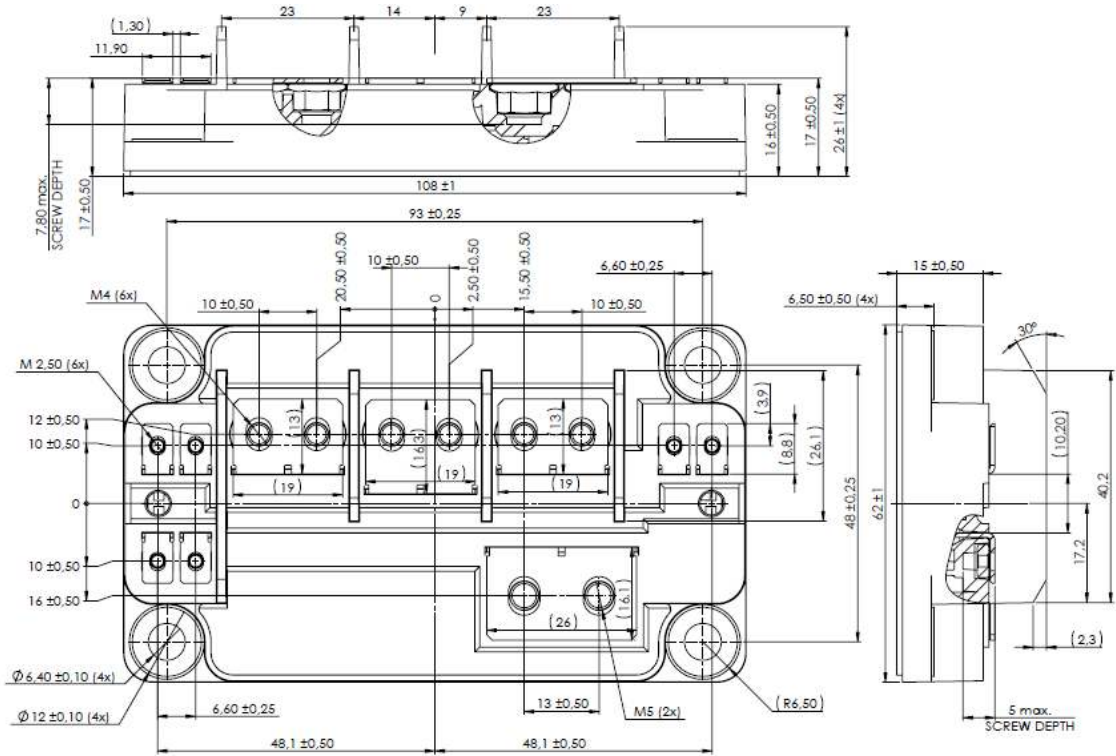

**Note:** See application note AN1911 containing the mounting instructions for SP6 low inductance power module on [www.microsemi.com](http://www.microsemi.com)

**Microsemi Corporate Headquarters**

One Enterprise, Aliso Viejo,  
 CA 92656 USA  
 Within the USA: +1 (800) 713-4113  
 Outside the USA: +1 (949) 380-6100  
 Fax: +1 (949) 215-4996  
 Email: [sales.support@microsemi.com](mailto:sales.support@microsemi.com)  
[www.microsemi.com](http://www.microsemi.com)

© 2018 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; enterprise storage and communication solutions; security technologies and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, California, and has approximately 4,800 employees globally. Learn more at [www.microsemi.com](http://www.microsemi.com).