

**Ratings**

Voltage: 300 V  
 Temperature: -25 ~ 80 °C  
 Flammability: VW-1

**Conductor**

Conductor count: 4  
 Gauge: 26 0.14 mm<sup>2</sup>  
 Material: tinned copper strands  
 Strand size:  $\varnothing 0.16 \times 7$   
 Resistance at 20 °C: 150  $\Omega$  /km max

**Insulator**

Material: PVC  
 Color: yellow, white, black, red  
 Diameter:  $\varnothing 1.1 \pm 0.10$  mm  
 Nominal thickness: 0.29 mm  
 Resistance at 20 °C: 10 M $\Omega$  /km min



**Outer jacket**

Material: PVC  
 Color: white  
 Diameter:  $\varnothing 4.25 \pm 0.20$  mm  
 Nominal thickness: 0.80 mm

**Wire marking:** E339579 UL AWM STYLE 2464 26 80°C  
 300V VW-1 --- cUL AWM I/II A 80°C 300V FT1 LF TENSILITY

**Tests**

Insulation tensile strength: 2.11 kgf/mm<sup>2</sup>  
 Jacket tensile strength: 1.05 kgf/mm<sup>2</sup>  
 After aging at 113  $\pm 2$  °C for 7 days:  
   Minimum tensile strength 70 % original  
   Minimum elongation 65 % original  
 Heat shock: 121  $\pm 1$  °C /1 hour, no observed degradation  
 Deformation: 121  $\pm 1$  °C /1 hour,  $\leq 50$  %  
 Cold bend: -10  $\pm 2$  °C /1 hour, no observed cracking

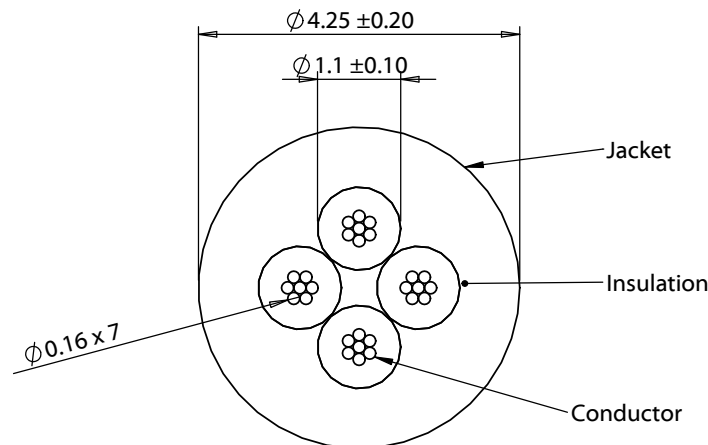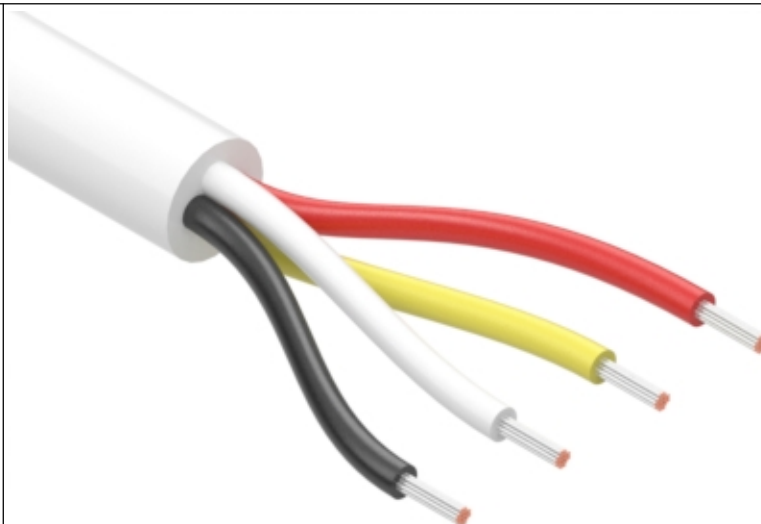

Revision:	Date:	Description:
A	06/26/2014	Initial release
A1	09/05/2018	Increased operating temperature range

Prepared: AW <small>Digitally signed by AW Date: 2018.09.06 11:10:23 +07'00'</small>
Verified: PS <small>Digitally signed by PS Date: 2018.09.06 11:46:44 +07'00'</small>
Dimensions are in millimeters. Tolerances: X: $\pm 0.5$ mm X.X: $\pm 0.3$ mm X.XX: $\pm 0.05$ mm

Notes: RoHS and REACH compliant
Function test: no open, no short circuit, no intermittent
Description: Wire, 4C TS, 26 AWG, UL2464, 300V, 80C, 4.25 mm, VW-1, PVC, white

**TENSILITY**

tel 1.541.323.3228 800 877.670.7118  
 fax 1.541.323.4202 web tensility.com

Size: A	Part number: 30-00393
Scale: 10:1	

Sheet 1 of 1

5

4

3

2

1