

# TREK-303DH

## 7" In-Vehicle Smart Display



### Features

- Vehicle-grade 7" (16:10) WVGA TFT LCD with rugged resistive type touchscreen
- Five user-programmable function keys
- Two 2-watt speakers
- Built-in light sensor for automatic dimming
- Easily installed and paired with TREK computing box via a single-cable connection
- Extended I/O ports (USB 2.0 Type A, power button and reset button) for easy TREK computing box maintenance
- Wide working temperature range (-30° C ~ 70° C)

### Introduction


The TREK-303DH is a vehicle display system for Mobile Resource Management (MRM) applications in trucks and buses. The TREK-303DH touch panel is ideal for fleet management and dispatch applications. It also meets requirements for automotive grade working temperatures (-30° C ~ 70° C). TREK-303DH provides excellent display capabilities, featuring lightweight housing, it's compatible with RAM mounting solutions that customers can easily install. TREK-303DH supports resolutions of 800 x 480; it is compatible with TREK box solutions connecting via a single cable. TREK-303DH is designed with drivers in mind: when the system requires powering up or waking up, it can be easily controlled from the button located on the side; and for night driving, the panel has an auto detecting light sensor to automatically adjust brightness.

### Specifications


LCD	Design Compatible Models	Paired with TREK computing box (i.e. TREK-5xx/6xx)
	Resolution (pixel)	WVGA (800 x 480)
	Video Interface	Single channel, 18 bit LVDS
	Pixel Pitch	0.2168 (H) x 0.2168 (V)
	Brightness (cd/m <sup>2</sup> )	500 (typical)
	View Angle ((H/V))	140° /120°
	Contrast Ratio	500
	Backlight Type	LED
	Backlight Life (Hrs)	50K
Touchscreen	Size	7.11" format
	Type	4-wire Resistive
	Transparency	81% ± 3%
	Hardness	3H
	Durability	Knock test > 200,000 times (Stylus= R0.8,<=250g)
	IK Shock-Protection Rate	IK-07 (by project-based)
Front Panel	Speaker	2 x 2-watt speaker
	Hotkeys	5 x User-programmable Function key with green LED
	Brightness Control	1 x Built-in light sensor for auto-dimming implementation
Rear I/O	Smart Display Port	1 x 36-pin locking type high density connector to be paired with TREK-5xx/6xx
Right Side I/O	USB Port	1 x USB 2.0 Host Type A (Data access from/to TREK computing box)
	Power button	1 x Power button (To power on/off TREK computing box)
	Reset button	1 x Reset button (To Reset TREK computing box)
Power	DC Input	12 V ± 5% (Powered by TREK computing box directly)
	Power Consumption	7W (Nominal), 12W (Max.)
Mechanical	Mounting	RAM mount
	Material	PC
	Weight	0.67 kg
	Dimensions (W x H x D)	212.75 x 141.85 x 35 mm
Environment	Operating Temperature	-30° C ~ 70° C
	Storage Temperature	-40° C ~ 80° C
	Vibration	MIL-STD-810G, SAE J1455 4.9.4.2
	Certifications	CE, FCC, CCC
	IP Rating	IP31 (entire system), IP 54 (with I/O Cover)

## Dimensions

Unit: mm

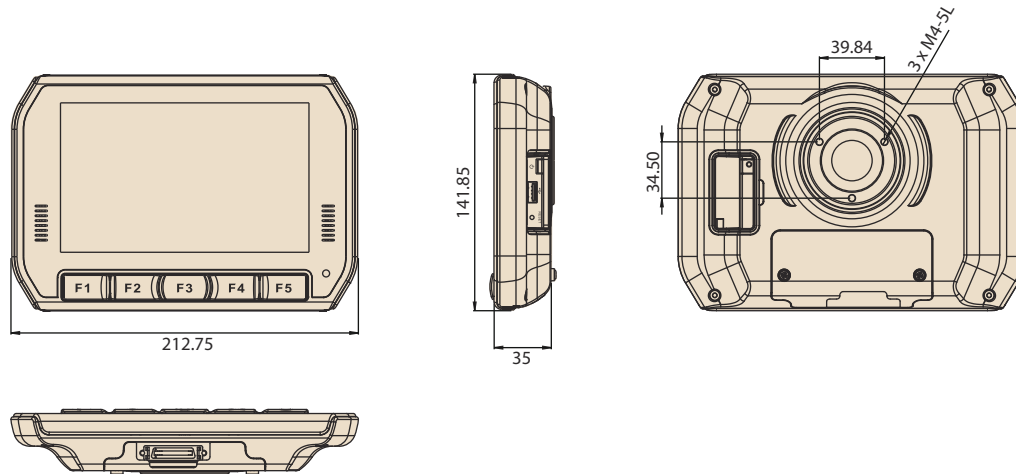


## I/O Connectors

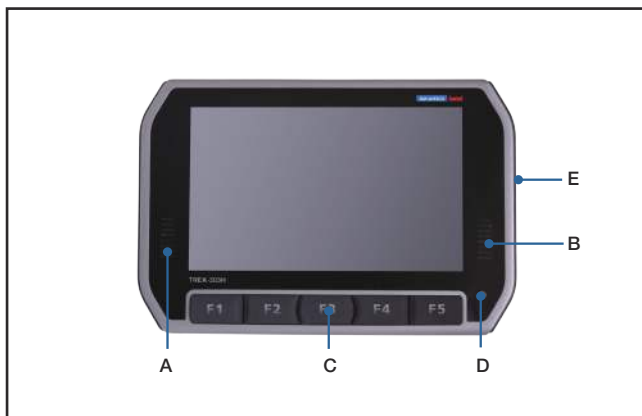

A. B. Speaker  
C. User-defined hotkeys

D. Light sensor  
E. Reset, power, USB host (side)

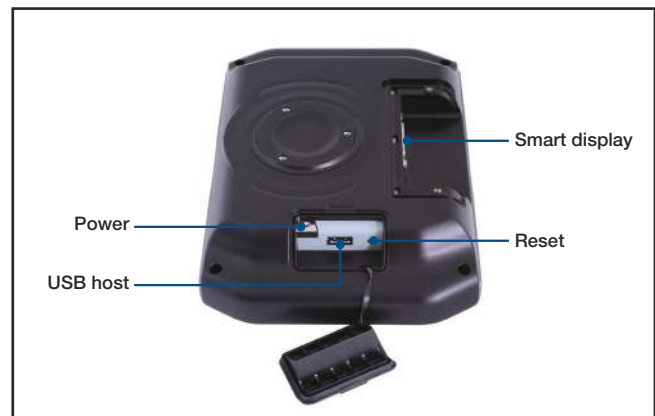

## Ordering Information

Part Number	Description
TREK-303D-HA0E	7" WVGA in-vehicle Smart Display, with 4-wire Resistive Touchscreen without Bezel

## Optional Items

Part Number	Description
RAM-MOUNT-06E	VESA RAM mount w/VESA base(3.625") & 5.625" double socket arm for 1.5" ball base
RAM-MOUNT-07E	5.625" double socket arm for 1.5" ball base
1700020007	2-meter smart display cable (Paired with TREK-5xx/6xx)
1700020008	5-meter smart display cable (Paired with TREK-5xx/6xx)