


## 8306-6 MINIATURE ELECTRONIC SIDE CUTTER



- > Short, head pointed and flattened (relief-milled), with small bevel
- > Induction-hardened precision cutting edges, 61 - 63 HRC
- Cutting values:**
- > Medium-hard wire: 0,8 mm/AWG 20]
- > Soft wire: 1,5 mm/AWG 15

> ESD = electrostatic discharge protection





CL	l mm	kg	Code	No.
10	120	0.072	6727500	8306-6

## 8306-8 MINIATURE ELECTRONIC SIDE CUTTER



- > With wire gripper
- > Oval head, with bevel
- > Induction-hardened precision cutting edges, 61 - 63 HRC
- Cutting values:**
- > Hard wire: 0,4 mm/AWG 26]
- > Medium-hard wire: 1,0 mm/AWG 18
- > Soft wire: 1,5 mm/AWG 1

> ESD = electrostatic discharge protection

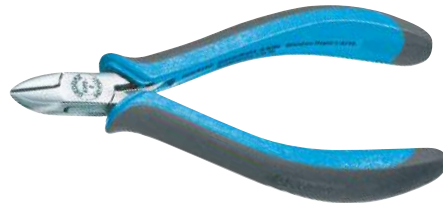

CL	l mm	kg	Code	No.
13	125	0.076	6727930	8306-8

## Electronic side cutter carbide


Tungsten-carbide cutting edges induction-hardened, 84-86 HRA

## 8306-7 ELECTRONIC SIDE CUTTER CARBIDE



- > Oval head, with bevel
- > Tungsten-carbide cutting edges for an extremely long service life
- > Hardness 84 - 86 HRA
- Cutting values:**
- > Piano wire: 0,6 mm/AWG 22]
- > Hard wire: 1,0 mm/AWG 18
- > Soft wire: 2,0 mm/AWG 12

> ESD = electrostatic discharge protection




CL	l mm	kg	Code	No.
11	125	0.076	6727770	8306-7

## 8306-9 ELECTRONIC SIDE CUTTER CARBIDE



- > Tungsten-carbide cutting edges for an extremely long service life
- > Hardness 84 - 86 HRA
- > Pointed, slim head for work in confined spaces
- > With small bevel
- Cutting values:**
- > Piano wire: 0,4 mm / 26 AWG
- > Hard wire: 0,8 mm / 20 AWG
- > Soft wire: 1,8 mm / 13 AWG

> Especially for cutting SMD components  
> With opening spring  
> ESD = electrostatic discharge protection



CL	l mm	kg	Code	No.
11	125	0.076	1743414	8306-9