



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00502	Connector, stereo plug, 3.5xL20.5 mm, brass, gold plated, molding style	2	
2	30-00653	Wire, 2C TS, 28 AWG, 150V, 70C, 2.6 mm, spiral shield, TPU, WBL	1	Bio-compatible jacket
3	24-00028	Overmold, TPE, black	2	

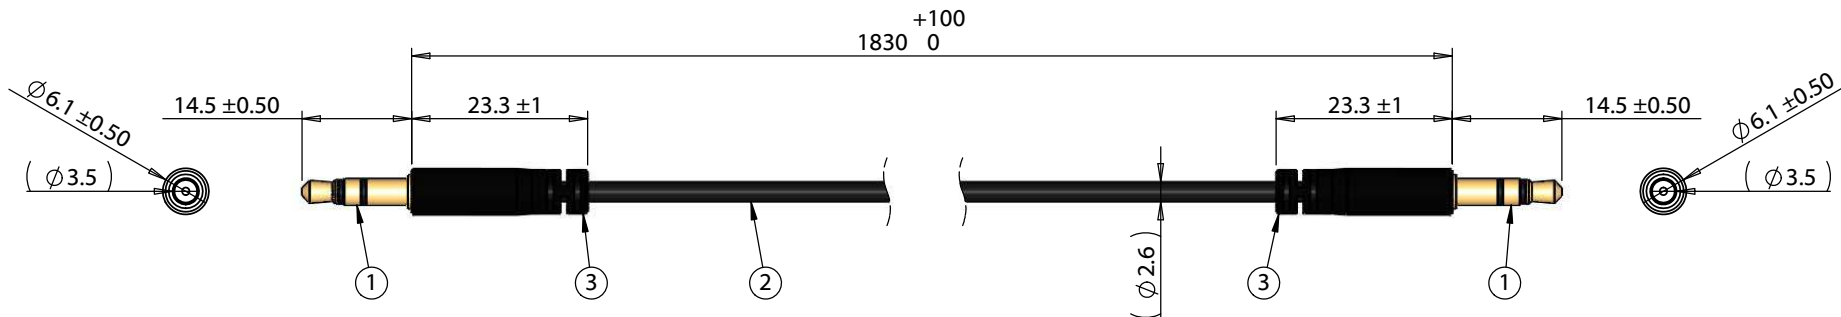

Wiring Diagram		
50-00502	wire color	50-00502
A	white	A
B	black	B
C	shield	C

Revision:	Date:	Description:
A	10/20/2015	Initial release
A1	11/11/2015	Modified overmold material
A2	01/07/2016	Modified dimensions

Prepared: **GL**
Digitally signed by GL
Date: 2018.03.23
17:02:43 -07'00'

Verified: **PS**
Digitally signed by PS
Date: 2018.03.27
13:24:58 -07'00'

Dimensions are in millimeters.
 Tolerances:
 X: ± 0.5 mm
 X.X: ± 0.3 mm
 X.XX: ± 0.05 mm

Notes:

RoHS compliant

Function test: no open, no short circuit, no intermittent

Description:
 Cable, 1830 mm, 3.5 mm 3C 50-00502 slim audio plug to same, 28 AWG, 30-00653, shielded, WBL

TENSILITY

tel 1.541.323.3228 800 877.670.7118
 fax 1.541.323.4202 web tensility.com

Size: A Part number: 10-02047

Scale: 1:2

Sheet 1 of 1