
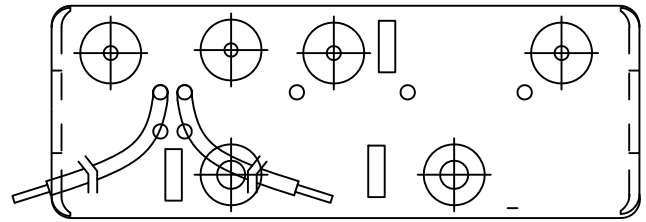
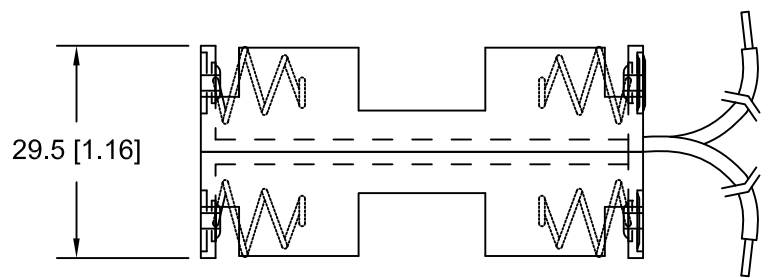



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
11/26/05	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
8/06/10	B	REDRAWN IN AUTOCAD AND UPDATED SPECIFICATION	T.B.	B.S.	
10/31/14	C	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
06/16/17	D	DIM. 150.0 WAS 152.4 DIM. 5.0 WAS 3.18	T.B.	B.S.	
06/27/17	E	UPDATED SIDEVIEW	T.B.	B.S.	

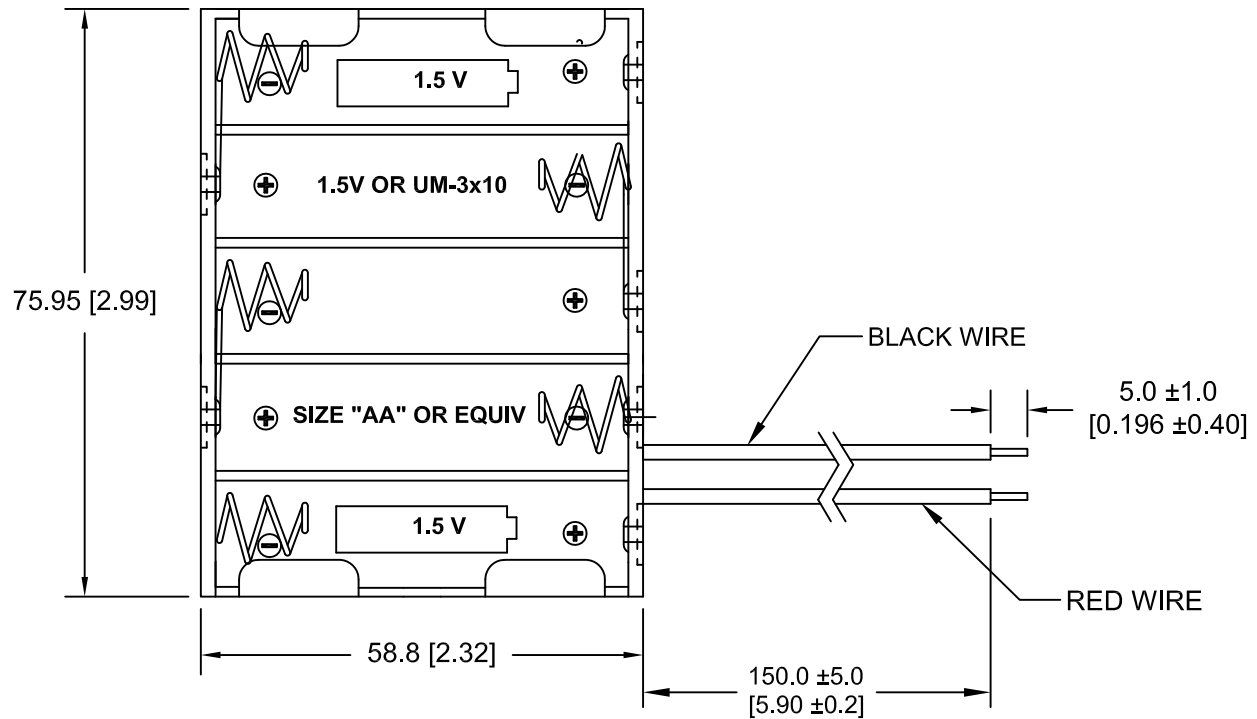

MATERIAL:
 HOUSING: POLYPROPYLENE, BLACK
 FLAMMABILITY RATING -UL94 HB, UL FILE NO. E216959
 TEMPERATURE RANGE: -10°C to +100°C
 SPRINGS: SPRING STEEL, NICKEL PLATED
 RIVETS: BRASS, NICKEL PLATED
 WIRES: 26AWG, UL1007, CSA-TR-64, 300V, 80°C
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS
 PER EIA-540J000
 ROHS 2 COMPLIANT

Tolerance (Inches)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal ±.5 (.020)	Scale	Drawn By B.S.	
Fractional ±.8 (.030)	Title TEN "AA" CELL HOLDER WITH WIRE LEADS		
Angular ± 3°	Date 06/27/17	Drawing Number BH310AAW	
		Approved By T.B.	