



#### **Versa lex 1.3 (Adjustable CCT)**

Our Versaflex Commercial down light has been optimized to the third generation. The innovative separable design of junction box and housing make it more flexible and considerate. Versaflex 1.3 downlights have a built-in integral junction box that eliminates the need for a traditional recessed housing. During installation, it simply gets wired to a wall switch and placed into the ceiling.

- Up to 100 lumens per watt
- Available with either 4/6/8" downlight cans
- Innovative separable design of j-box & trim
- No can needed
- Select any trim size with one J-Box

- 0-10 Dimming
- Universal 120-347Vac
- Energy Star certified
- Optional retrofit kit
- Optional backup battery

#### Versafex 1.3 (Adjustable CCT)

| SKU#   | Model #  | Watts | Lumens          | ССТ      | Fits           | Voltage    | Certifications |
|--------|--|-------|-----------------|----------|----------------|------------|----------------|
| 151190 | BLT-YL4DR-A1-15Z<br>BLT-YL6DR-A1-15Z<br>BLT-YL8DR-A1-15Z | 15W   | up to 1661.70Lm | 3K/4K/5K | 4"<br>6"<br>8" | 120-347Vac | UL & ES        |
| 151191 | BLT-YL4DR-A1-20Z<br>BLT-YL6DR-A1-20Z<br>BLT-YL8DR-A1-20Z | 20W   | up to 2170.60Lm | 3K/4K/5K | 4"<br>6"<br>8" | 120-347Vac | UL & ES        |
| 151192 | 4" Trim  |       |                 |          |                |            |                |
| 151193 | 6" Trim  |       |                 |          |                |            |                |
| 151194 | 8" Trim  |       |                 |          |                |            |                |

#### TUNEABLE WHITE




### **Specifications**

| 1               |  |  |  |  |
|-----------------|--|--|--|--|
| Wattage         | 15W/ 20W                                 |  |  |  |
| Color           | 3000K/4000K/5000K                        |  |  |  |
| temperature     |  |  |  |  |
| Working voltage | AC120-347V 50Hz/ 60Hz                    |  |  |  |
| Luminous        | ≥80lm/W                                  |  |  |  |
| efficiency      |  |  |  |  |
| CRI             | ≥80                                      |  |  |  |
| Chip type       | SMD                                      |  |  |  |
| Chip            | Xuyu                                     |  |  |  |
| manufacturer    |  |  |  |  |
| Driver          | Constant current isolated 、Flicker、0-10V |  |  |  |
| Power Factor    | ≥0.9                                     |  |  |  |
| ambient         | 0005 to 11005                            |  |  |  |
| temperature     | -22°F to 113°F                           |  |  |  |
| Material        | Aluminum                                 |  |  |  |
| Mounting mode   | Recessed                                 |  |  |  |
| Lighting angle  | ngle 60°                                 |  |  |  |
| lifetime        | 30000H                                   |  |  |  |
| certificate     | UL,ES,FCC                                |  |  |  |




### CORRELATED COLOR TEMPERATURE (CCT)

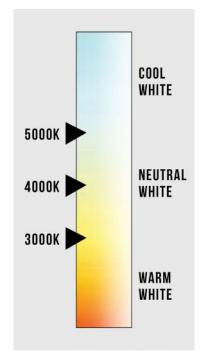



### **Options**














4" Trim




| SKU#   | Size    |
|--------|---------|
| 151192 | 4" Trim |
| 151193 | 6" Trim |
| 151194 | 8" Trim |

#### **Dimensions**







### **Packing**

| SKU #  | Model #  | Pieces per Carton | Dimensions             | Weight    |
|--------|--|-------------------|------------------------|-----------|
| 151190 | BLT-YL4DR-A1-15Z<br>BLT-YL6DR-A1-15Z<br>BLT-YL8DR-A1-15Z | 8                 | 9.84" X 8.86" X 9.29"  | 7.94 Lbs. |
| 151191 | BLT-YL4DR-A1-20Z<br>BLT-YL6DR-A1-20Z<br>BLT-YL8DR-A1-20Z | 8                 | 9.84" X 8.86" X 9.29"  | 7.94 Lbs. |
| 151192 | 4" Trim  | 8                 | 12.2" X 12.2" X 6.3"   | 2.43 Lbs. |
| 151193 | 6" Trim  | 8                 | 8.66" X 8.66" X 16.02" | 3.31 Lbs. |
| 151194 | 8" Trim  | 8                 | 9.84" X 9.84" X 15.63" | 4.41 Lbs. |

### **Application**







BEYOND LED TECHNOLOGY