

GloTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: UK BS1363A plug (Type G), approved in UK, HK, Singapore, Saudi Arabia, Malaysia & Gulf States to IEC320-C19; GT Cable #428: 1.5 / 3 Conductors, mm OD, H05VV-F, 70 Deg.C, 500V, BLU/BRN/GRN-YW, Approvals: IEC 60227, 2500mm, GlobTek Black	
	Model No. Power Cord	
	Part No./Ordering No. 6104282M57032(R)	Rev B

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification
ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at <https://www.globtek.com/iso-certificates/>
Prop 65 Statement: <https://en.globtek.com/prop-65-statement.pdf>

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions (<https://en.globtek.com/terms-and-conditions/>).

The purchaser of this product (Customer) agrees that it is their sole responsibility to determine suitability/fitness of the product described in this specification for their application and to take precautions for protection against any hazards attendant to the handling and use of the product.

Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.
Contents of this document are subject to change without prior notice.

Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing.
A delay in receipt of this form will delay delivery schedule.

Company Name: _____	Customer P/N: _____
Quote Number: _____	Date: _____
Authorized Representative Name: _____	Authorized Representative Signature: _____

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: UK BS1363A plug (Type G), approved in UK, HK, Singapore, Saudi Arabia, Malaysia & Gulf States to IEC320-C19; GT Cable #428: 1.5 / 3 Conductors, mm OD, H05VV-F, 70 Deg.C, 500V, BLU/BRN/GRN-YW, Approvals: IEC 60227, 2500mm, GlobTek Black	
	Model No. Power Cord	
	Part No./Ordering No. 6104282M57032(R)	Rev B

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

REVISION HISTORY

REV	DESCRIPTION	SUB	DATE	APPROVED
B	Update cable drawing	QA	11/02/2020	QA
A	Initial Release	dhock	10/08/2019	QA

Cordset Information:

CordsetColor:GlobTek Black


Cord Length (mm):2500

NOTES:

FUSE 13A


GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: UK BS1363A plug (Type G), approved in UK, HK, Singapore, Saudi Arabia, Malaysia & Gulf States to IEC320-C19; GT Cable #428: 1.5 / 3 Conductors, mm OD, H05VV-F, 70 Deg.C, 500V, BLU/BRN/GRN-YW, Approvals: IEC 60227, 2500mm, GlobTek Black
	Model No. Power Cord
Part No./Ordering No. 6104282M57032(R)	Rev B

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

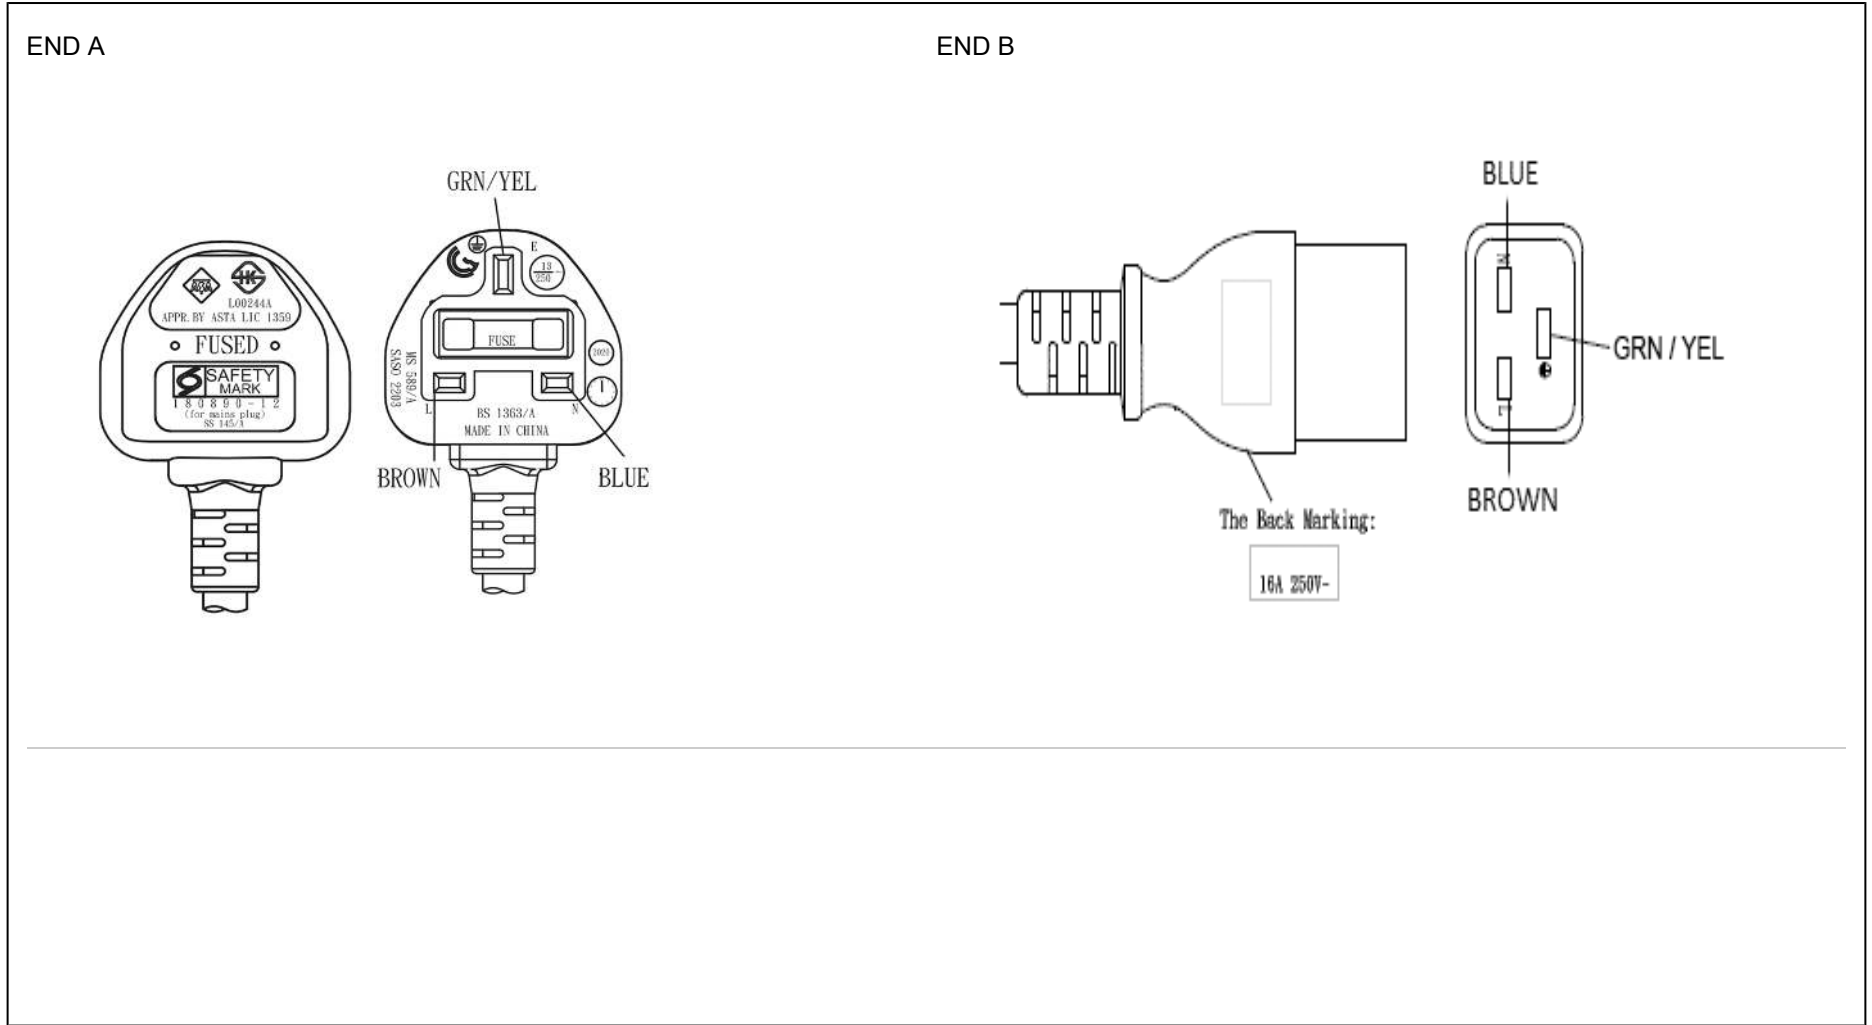

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: UK BS1363A plug (Type G), approved in UK, HK, Singapore, Saudi Arabia, Malaysia & Gulf States to IEC320-C19; GT Cable #428: 1.5 / 3 Conductors, mm OD, H05VV-F, 70 Deg.C, 500V, BLU/BRN/GRN-YW, Approvals: IEC 60227, 2500mm, GlobTek Black
	Model No. Power Cord
Part No./Ordering No. 6104282M57032(R)	Rev B

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

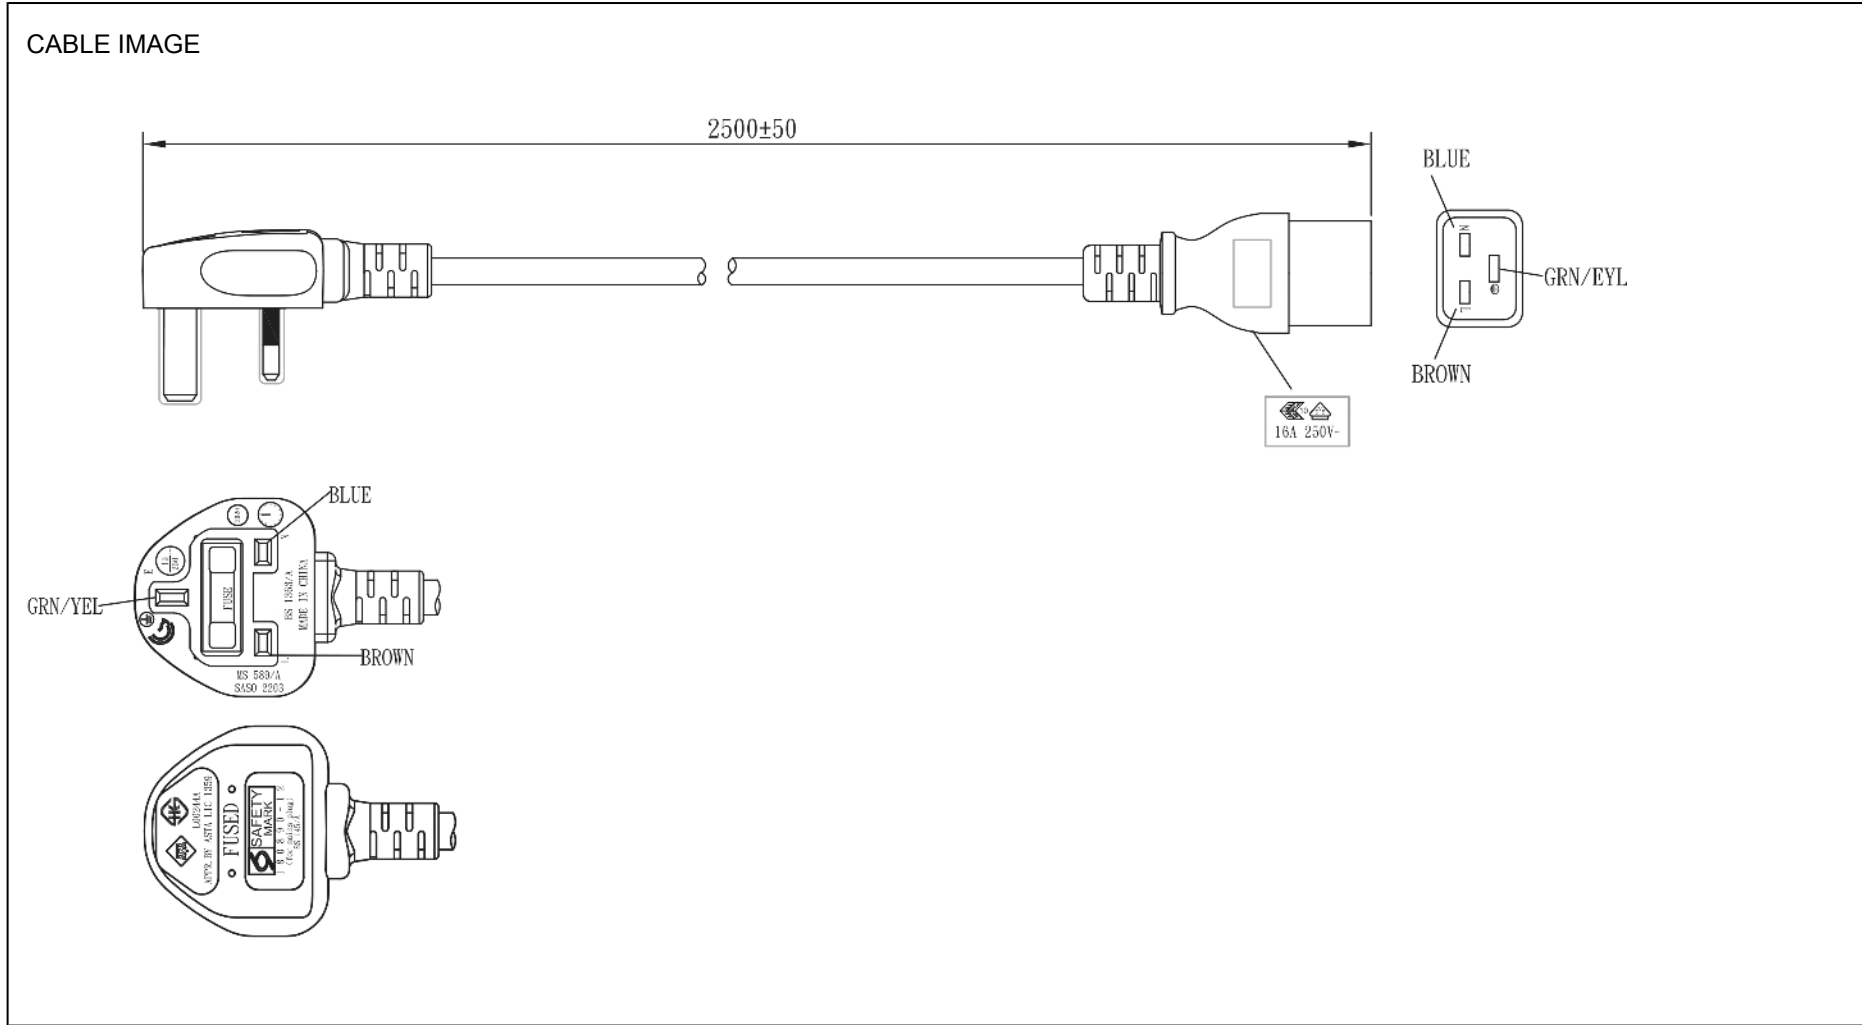

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: UK BS1363A plug (Type G), approved in UK, HK, Singapore, Saudi Arabia, Malaysia & Gulf States to IEC320-C19; GT Cable #428: 1.5 / 3 Conductors, mm OD, H05VV-F, 70 Deg.C, 500V, BLU/BRN/GRN-YW, Approvals: IEC 60227, 2500mm, GlobTek Black	
	Model No. Power Cord	Part No./Ordering No. 6104282M57032(R)
		Rev B

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

End A Code:610 Description:UK BS1363A plug (Type G), approved in UK, HK, Singapore, Saudi Arabia, Malaysia & Gulf States Rating (V):250 Rating (A):13.0 Gender:Male Overmolded:Yes	Cable Code:428 Description:GT Cable #428: 1.5 / 3 Conductors, mm OD, H05VV-F, 70 Deg.C, 500V, BLU/BRN/GRN-YW, Approvals: IEC 60227 Color:GlobTek Black Wire Gauge(AWG):1.5 Cond:3 Type:H05VV-F Temperature:70° C Amps:16 Volts:500 OD: ConductorsColors:BLU/BRN/GRN-YW	End B Code:7032EU Description:IEC320-C19; Rating (V):250 Rating (A):16.0 Gender:Female Overmolded:Yes
Overall cable rating:250VAC/13A		

PROPRIETARY INFORMATION








PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc.

2017 - 2023

quest /10/11/2023 6:41:50 AM CLONED FROM 6104283M07032(R)

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: UK BS1363A plug (Type G), approved in UK, HK, Singapore, Saudi Arabia, Malaysia & Gulf States to IEC320-C19; GT Cable #428: 1.5 / 3 Conductors, mm OD, H05VV-F, 70 Deg.C, 500V, BLU/BRN/GRN-YW, Approvals: IEC 60227, 2500mm, GlobTek Black	
	Model No. Power Cord	Part No./Ordering No. 6104282M57032(R)
		Rev B

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

Plug Approvals	Cable Approvals	Connector Approvals
 United Kingdom ASTA Diamond Approval Mark  SAFETY MARK  SINGAPORE NSM MARK Saudi Arabia SASO safety mark (file # only -- SASO 2203) Malaysia (File number)  Gulf Conformity mark	 CCC  Euro + SAA	 EN 10 DVE ENEC-VDE
BS1363/A plug		
AGENCY ONLINE DOCUMENTS http://en.globtek.com/cordsets/		
RoHS/RoHS3 Declaration https://www.globtek.com/pdf/rohs_cert/01ta000008AQE8AAO		
REACH Declaration https://www.globtek.com/pdf/iso_certificates/REACH.pdf		
Conflict Minerals Declaration https://www.globtek.com/pdf/conflict-minerals.pdf		
Prop 65 Statement https://en.globtek.com/prop-65-statement.pdf		
CE.UKCA.Cord https://globtek.secure.force.com/spec/ec_decl_product_model_family_incl_cord?id=01ta000008AQE8		
IPXY rating is based on 3rd party testing and customers should check suitability and test system level IPXY rating before ordering.		

PROPRIETARY INFORMATION


PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2017 - 2023

quest /10/11/2023 6:41:50 AM CLONED FROM 6104283M07032(R)

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: UK BS1363A plug (Type G), approved in UK, HK, Singapore, Saudi Arabia, Malaysia & Gulf States to IEC320-C19; GT Cable #428: 1.5 / 3 Conductors, mm OD, H05VV-F, 70 Deg.C, 500V, BLU/BRN/GRN-YW, Approvals: IEC 60227, 2500mm, GlobTek Black	
	Model No. Power Cord	Rev B
Part No./Ordering No. 6104282M57032(R)		

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

Hanking:250-610-7032
 Description:250 +/- 30mm
 Image:

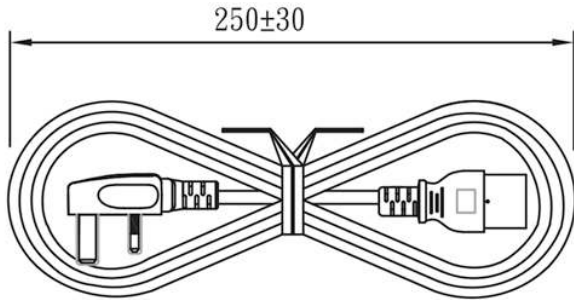

Notes/Modifications/Customizations (notes in this section supersede the values shown in the standard spec):