



Electrical Specifications

Center Frequency: 2402 MHz
3dB Bandwidth: 6 MHz Max
Insertion Loss: < -4 dB @ Center Frequency
Return Loss: >15 dB @ Center Frequency
Power Handling: 10 W


Mechanical

Connector Type: SMA (F)
Dimensions: 3.50 x 1.75 x 1.60 Inches

Environmental


Operating Temperature: 0 to +40° C
Storage Temperature: -20 to +70° C
Shock: 20 G. 11 ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

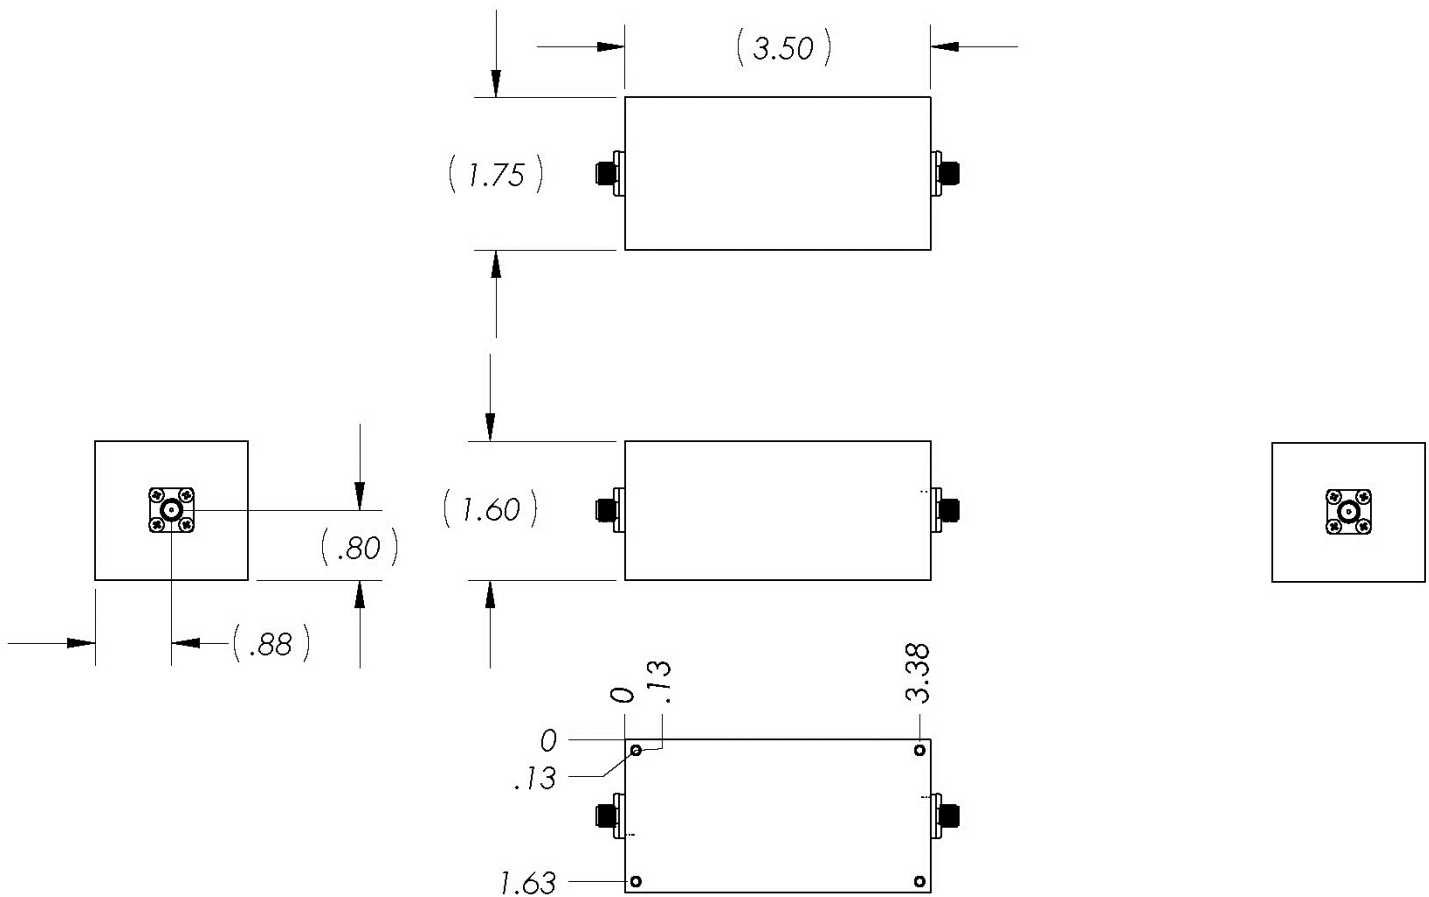



Outline Drawing:

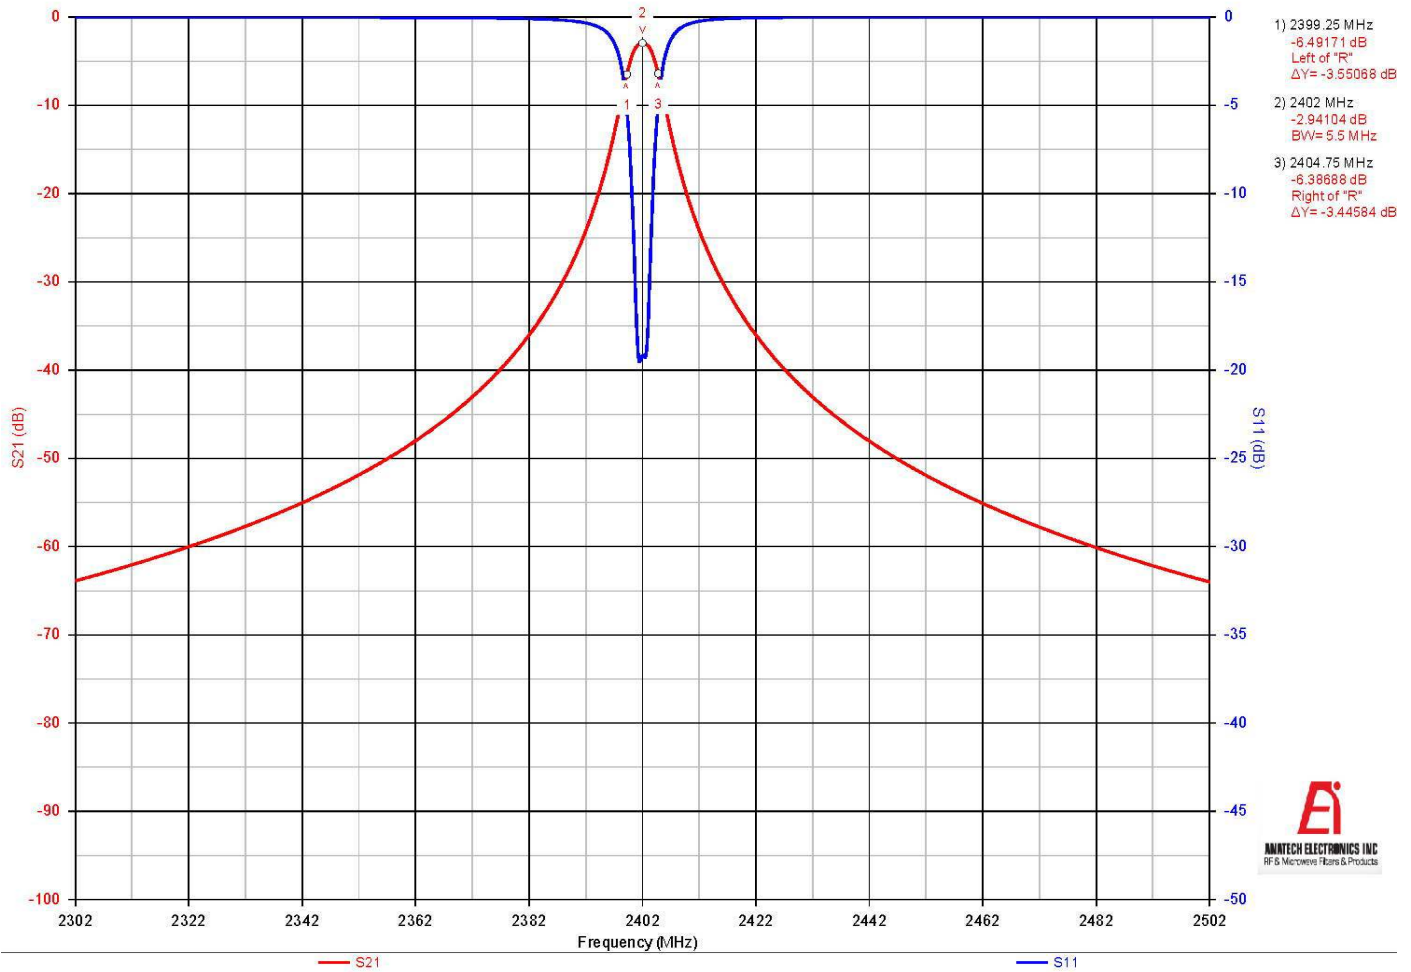

Note: This is a simulation plot. Actual results may differ once the product is implemented.