THERMAL PADS | HSP SERIES



ACCESSORIES



Features

- Easy-to-use thermal interface Material designed for use with Standard single-phase and three-phase solid-state relays.
- Excellent alternative to thermal grease.
- Shipped in packs of 25.

HSP-1


For use with all single phase Panel mount SSR's, Control modules and M50 power modules. **HSP-3**

For use will all three phase panel mount SSR's (53TP/53RV).

8

GENERAL SPECIFICATIONS

Description	HSP-1/HSP-3
Thickness, inch (mm)	0.003 (0.076)
Adhesive One Side	No
Thermal Impeadance [°C-in²/W] (1)	0.03 @20 psi
Apparent Thermal Conductivity [W/m-K]	1.0
Phase-Change Temperature [°C]	60
Operating Temperature Range [°C]	-55 to 150
Volume Resistivity [ohm-cm]	10 ¹² Ohm
Specific Gravity	NA
Suggested Heatsink Clamping Pressure, psi (MPa)	20 to 100 (0.138 to 0.690)

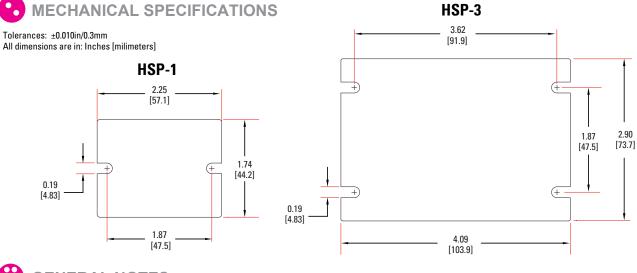

GENERAL NOTES

(1) This value is provided for reference only. Actual application performance is directly related to the surface roughness, flatness and pressure applied.





DANGER

RISK OF MATERIAL DAMAGE AND HOT ENCLOSURE

- The product's side panels may be hot, allow the product to cool before touching
- Follow proper mounting instructions including torque values

• Do not allow liquids or foreign objects to enter this product Failure to follow these instructions can result in serious injury, or equipment damage.



- HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH • Disconnect all power before installing or working with this
- equipment

 Verify all connections and replace all covers before turning on power

Failure to follow these instructions will result in death or serious injury

Page 2

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, OUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE TO SENSATA DATA SHEETS.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

Americas

+1 (877) 502 5500 – Option 2 sales.crydom@sensata.com

Europe, Middle East & Africa +44 (1202) 416170

Asia Pacific

sales.isasia@list.sensata.com China +86 (21) 2306 1500 Japan +81 (45) 277 7117 Korea +82 (31) 601 2004 India +91 (80) 67920890 Rest of Asia +886 (2) 27602006 ext 2808