

# Features

# Regulated Converter

- Wide input range 85-264VAC
- Standby mode optimized PSU (ENER Lot 6)
- Ultra-high efficiency over entire load range
- Operating temperature range: -40°C to +85°C
- Class II installations (without FG)
- EMC compliant without external components
- No load power consumption 40mW typ.



## RAC15-K

15 Watt  
2" x 1"  
Single Output



IEC/EN62368-1 certified  
UL62368-1 certified  
CAN/CSA-C22.2 No. 62368-1-14 certified  
IEC60335-1 5th Edition certified  
IEC/EN60335 certified  
IEC/EN61558-1 certified  
IEC/EN61558-2-16 certified  
IEC/EN61204-3 compliant  
EN55032/14 compliant  
EN55024 compliant  
CB Report

### Description

The RAC15-K series are highly efficient PCB-mount power conversion modules with ultra-low energy losses especially in light load conditions, making them a benchmark for always-on and standby mode operations, which are typically coming along with IoT and smart applications. The power supply units cover worldwide mains input range of 85VAC up to 264VAC and come with international safety certifications for industrial, AV and ITE as well as household standards. These AC/DC modules operate in a temperature range of -40°C to +85°C and offer fully protected single or dual outputs as well as EMC class B compliance without the need of any external components.

### Selection Guide

| Part Number | Input Voltage Range [VAC] | Output Voltage [VDC] | Output Current [mA] | Efficiency typ <sup>(1)</sup> [%] | Max. Capacitive Load <sup>(2)</sup> [µF] |
|-------------|---------------------------|----------------------|---------------------|-----------------------------------|--|
| RAC15-05SK  | 85-264                    | 5                    | 3000                | 84                                | 10000                                    |
| RAC15-12SK  | 85-264                    | 12                   | 1250                | 86                                | 8000                                     |
| RAC15-15SK  | 85-264                    | 15                   | 1000                | 86                                | 1500                                     |
| RAC15-24SK  | 85-264                    | 24                   | 615                 | 85                                | 1000                                     |

#### Notes:

Note1: Efficiency is tested at 230VAC input and constant resistive load at +25°C ambient

Note2: Max Cap Load is tested at nominal input and full resistive load

### Model Numbering



Ordering Examples:  
RAC15-05SK      5Watt      5Vout      Single Output

### Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

| BASIC CHARACTERISTICS                |                     |                  |                 |        |                  |
|--------------------------------------|---------------------|------------------|-----------------|--------|------------------|
| Parameter                            | Condition           |                  | Min.            | Typ.   | Max.             |
| Internal Input Filter                |                     |                  | Pi type         |        |                  |
| Input Voltage Range <sup>(3,4)</sup> | nom. Vin = 230VAC   |                  | 85VAC<br>120VDC | 230VAC | 264VAC<br>370VDC |
| Input Current                        | 115VAC<br>230VAC    |                  |                 |        | 400mA<br>350mA   |
| Inrush Current                       | cold start at +25°C | 115VAC<br>230VAC |                 |        | 20A<br>40A       |
| continued on next page               |                     |                  |                 |        |                  |

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

**BASIC CHARACTERISTICS**

| Parameter  | Condition                          | Min.       | Typ.         | Max.                 |
|--|------------------------------------|------------|--------------|----------------------|
| No Load Power Consumption                                  | 230VAC                             |            | 40mW         |                      |
| ErP Lot 6 Standby Mode Conformity (Output Load Capability) | 0.5W<br>Input Power = 1.0W<br>2.0W |            |              | 0.3W<br>0.7W<br>1.6W |
| Input Frequency Range                                      | AC Input                           | 47Hz       |              | 63Hz                 |
| Minimum Load   |                                    | 0%         |              |                      |
| Power Factor   | 115VAC<br>230VAC                   | 0.6<br>0.5 |              |                      |
| Start-up Time  |                                    |            | 150ms        |                      |
| Rise Time  |                                    |            | 40ms         |                      |
| Hold-up Time   | 115VAC<br>230VAC                   |            | 15ms<br>90ms |                      |
| Internal Operating Frequency                               |                                    |            |              | 100kHz               |
| Output Ripple and Noise <sup>(6)</sup>                     | 20MHz BW                           |            | 100mVp-p     |                      |

**Notes:**


Note3: The products were submitted for safety files at AC-Input operation

Note4: Refer to "Line Derating"


Note5: Measurements are made with a 1.0µF MLCC across output (low ESR)

**Efficiency vs. Load**

**RAC15-05SK**

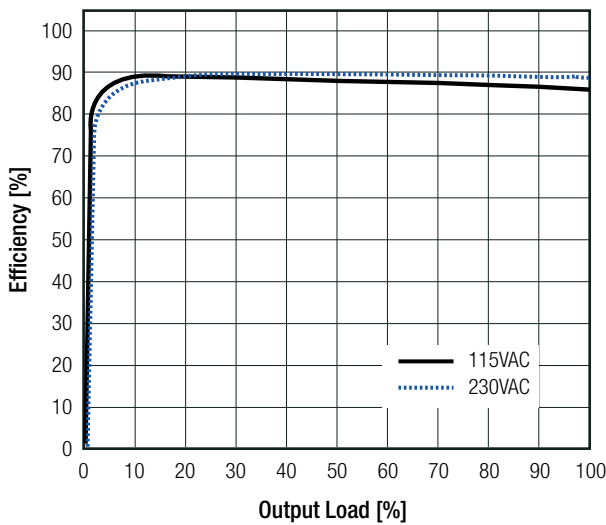

**RAC15-12SK**

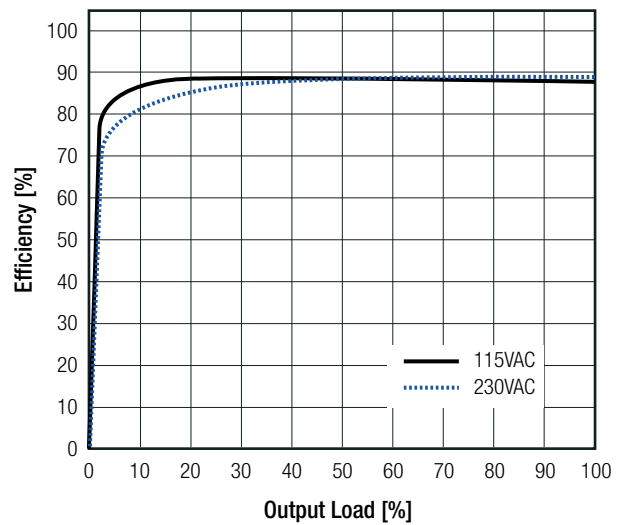

**REGULATIONS**


| Parameter                      | Condition                             | Value                   |
|--------------------------------|---------------------------------------|-------------------------|
| Output Accuracy                |                                       | ±2.0% typ.              |
| Line Regulation                | low line to high line                 | ±1.0% typ.              |
| Load Regulation <sup>(6)</sup> | 10% to 100% load                      | 1.0% typ.               |
| Transient Response             | 25% load step change<br>recovery time | 4.0% max.<br>500µs typ. |

**Notes:**

Note6: Operation below 10% load will not harm the converter, but specifications may not be met

continued on next page

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

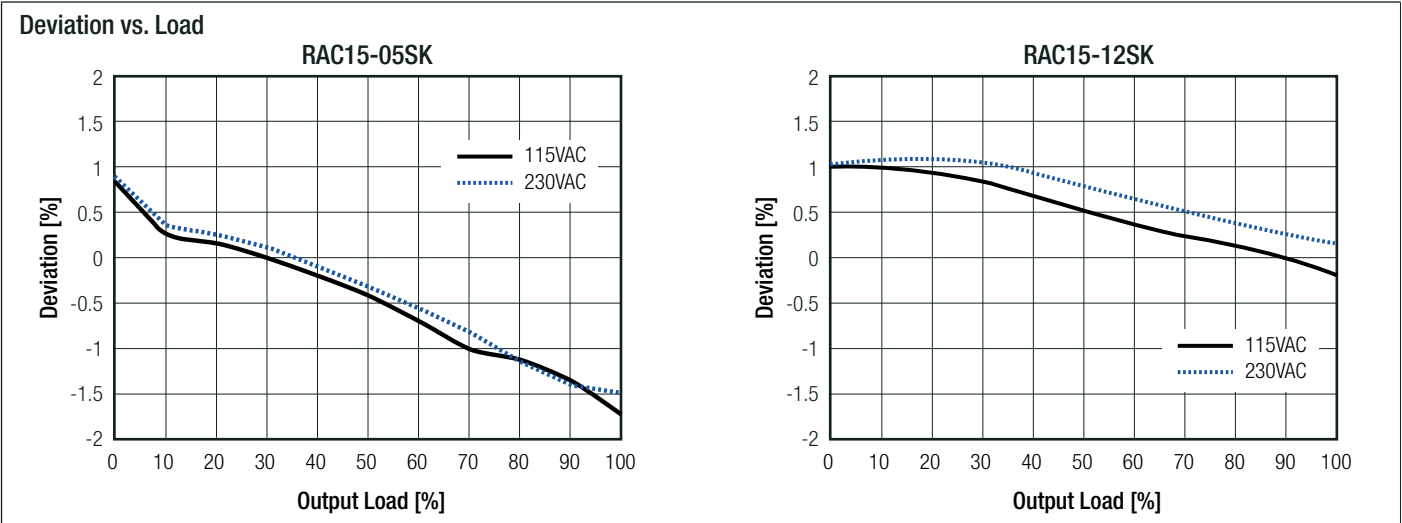

| PROTECTIONS                      |             |                             |
|----------------------------------|-------------|-----------------------------|
| Parameter                        | Type        | Value                       |
| Input Fuse <sup>(7)</sup>        | internal    | T3.15A, slow blow type      |
| Short Circuit Protection (SCP)   | below 100mΩ | hiccup, auto recovery       |
| Over Voltage Protection (OVP)    |             | 150% - 195%, latch off mode |
| Over Current Protection (OCP)    |             | 150% - 195%, hiccup mode    |
| Over Voltage Category            |             | OVCII                       |
| Class of Equipment               |             | Class II                    |
| Isolation Voltage <sup>(8)</sup> | I/P to O/P  | tested for 1 minute         |
| Isolation Resistance             |             | V <sub>iso</sub> = 500VDC   |
| Isolation Capacitance            |             | 100pF max.                  |
| Insulation Grade                 |             | reinforced                  |
| Leakage Current                  |             | 0.25mA max.                 |

**Notes:**  
 Note7: Refer to local safety regulations if input over-current protection is also required  
 Note8: For repeat Hi-Pot testing, reduce the time and/or the test voltage


| ENVIRONMENTAL               |                                  |  |
|-----------------------------|----------------------------------|--|
| Parameter                   | Condition                        | Value  |
| Operating Temperature Range | natural convection 0.1m/s        | full load  |
|                             |                                  | refer to derating graph                                    |
| Maximum Case Temperature    |                                  | -40°C to +55°C   |
| Temperature Coefficient     |                                  | -40°C to +85°C   |
| Operating Altitude          |                                  | +95°C  |
| Operating Humidity          | non-condensing                   | 0.05%/K  |
| IP Rating                   |                                  | 3000m  |
| Pollution Degree            |                                  | 20% - 90% RH max.  |
| Vibration                   | according to MIL-STD-202G        | IP20   |
| Design Lifetime             | +25°C                            | 10-500Hz, 2G 10min./1cycle, period 60min. along x,y,z axes |
|                             | +55°C                            |  |
| MTBF                        | according to MIL-HDBK-217F, G.B. | +25°C  |
|                             |                                  | +40°C  |

continued on next page


**Specifications** (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

**Derating Graph**

(@ Chamber and natural convection 0.1 m/s)

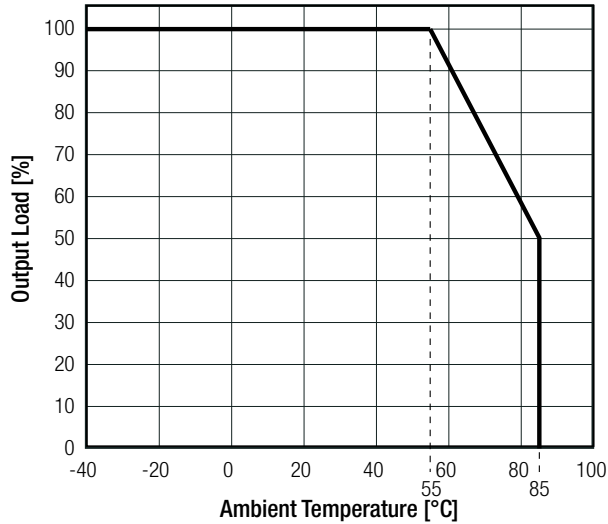

**Line Derating**

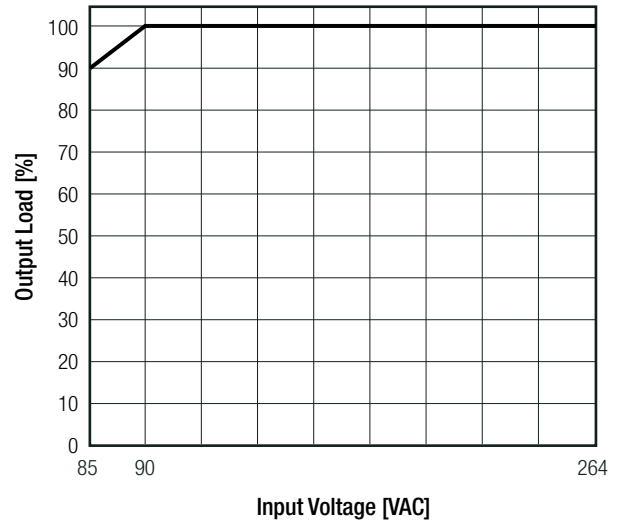

**SAFETY AND CERTIFICATIONS**

| Certificate Type (Safety)  | Report / File Number     | Standard  |
|--|--------------------------|---|
| Audio/Video, information and communication technology equipment - Safety requirements  | E224736                  | UL62368-1, 2nd Edition, 2014<br>CAN/CSA C22.2 Nr. 62368-1-14, 2nd Ed. 2014      |
| Audio/Video, information and communication technology equipment - Safety requirements (CB Scheme)  | E491408-A6008-CB-1       | IEC62368-1:2014 2nd Edition   |
| Audio/Video, information and communication technology equipment - Safety requirements (LVD)  |                          | EN62368-1:2014 + A11:2017   |
| Household and similar electrical appliances – Safety – Part 1: General requirements (CB Scheme)  | 4392216.50<br>4397422.50 | IEC60335-1:2010 5th Edition + AM1:2013  |
| Household and similar electrical appliances – Safety – Part 1: General requirements  | LCS180508046AS           | IEC60335-1:2010 + AMD2:2016 + COR1:2016<br>EN60335-1:2012 + A11:2014 + A13:2017 |
| Safety of power transformers, power supplies, reactors and similar products for supply voltages up to 1100 V (CB Scheme)                                 | 50198090 001             | IEC61558-1:2005 2nd Edition + A1:2009   |
| Safety of power transformers, power supplies, reactors and similar products for supply voltages up to 1100 V   |                          | EN61558-1:2005 + A1:2009  |
| Safety of power transformers, power supplies, reactors and similar products for supply voltages up to 1100 V Part 2: Particular requirements (CB Scheme) | 50198090 001             | IEC61558-2-16:2009 1st Edition + A1:2013  |
| Safety of power transformers, power supplies, reactors and similar products for supply voltages up to 1100 V Part 2: Particular requirements             |                          | EN61558-2-16:2009 + A1:2013   |
| EAC  | RU-AT.03.67361           | TP TC 004/2011  |
| RoHS2+   |                          | RoHS-2011/65/EU + AM-2015/863   |

| EMC Compliance  | Condition               | Standard / Criterion        |
|---|-------------------------|-----------------------------|
| Low voltage power supplies, d.c. output Part 3: Electromagnetic compatibility (EMC)                                 |                         | IEC/EN61204-3:2018, Class B |
| Electromagnetic compatibility of multimedia equipment - Emission requirements                                       | without external filter | EN55032:2015, Class B       |
| Electromagnetic compatibility of household appliances, electric tools and similar apparatus - Emission Requirements |                         | EN55014-1:2006 + A2:2011    |
| Information technology equipment - Immunity characters - Limits and methods of measurement                          |                         | EN55024:2010 + A1:2015      |
| Electromagnetic compatibility of household appliances, electric tools and similar apparatus - Immunity Requirements |                         | EN55014-2:2015              |

continued on next page




**Specifications** (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

| EMC Compliance  | Condition   | Standard / Criterion                    |
|---|---|---|
| ESD Electrostatic discharge immunity test   | Air ±8kV, Contact ±4kV  | EN61000-4-2:2009, Criteria B            |
| Radiated, radio-frequency, electromagnetic field immunity test  | 80MHz - 6GHz: 10V/m<br>1.4GHz - 2GHz: 3V/m<br>2.0GHz - 2.7GHz: 1V/m | EN61000-4-3:2006 + A1:2008, Criteria A  |
| Fast Transient and Burst Immunity   | AC Port: ±2.0kV<br>DC Port: ±2.0kV                                  | EN61000-4-4:2012, Criteria B            |
| Surge Immunity  | AC Port: L-N ±1.0kV<br>DC Port: ±0.5kV                              | EN61000-4-5:2014 + A1:2017, Criteria B  |
| Immunity to conducted disturbances, induced by radio-frequency fields   | AC Port: 10V<br>DC Port: 10V  | EN61000-4-6:2014, Criteria A            |
| Power Magnetic Field Immunity   | 50Hz, 30A/m   | EN61000-4-8:2010, Criteria A            |
| Voltage Dips and Interruptions  | Voltage Dips 20%  | EN61000-4-11:2004 + A1:2017, Criteria C |
|   | Voltage Dips 30%  | EN61000-4-11:2004 + A1:2017, Criteria C |
|   | Voltage Dips 60%  | EN61000-4-11:2004 + A1:2017, Criteria C |
|   | Voltage Dips 100%   | EN61000-4-11:2004 + A1:2017, Criteria B |
|   | Voltage Interruptions > 95%   | EN61000-4-11:2004 + A1:2017, Criteria C |
| Limits of Voltage Fluctuations & Flicker  |   | EN61000-3-3:2013                        |
| Limitations on the amount of electromagnetic interference allowed from digital and electronic devices   |   | FCC 47 CFR Part 15 Subpart B, Class B   |
| American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz |   | ANSI C63.4-2014, Class B                |
| <p><b>Notes:</b></p> <p>Note9: If output is connected to GND, please contact RECOM tech support for advice</p>  |   |   |

| DIMENSION AND PHYSICAL CHARACTERISTICS |           |                          |
|--|-----------|--------------------------|
| Parameter                              | Type      | Value                    |
| Material                               | case      | black plastic, (UL94V-0) |
|  | potting   | silicone, (UL94V-0)      |
|  | PCB       | FR4, (UL94V-0)           |
|  | baseplate | black plastic, (UL94V-0) |
| Dimension (LxWxH)                      |           | 52.5 x 27.4 x 23.0mm     |
| Weight                                 |           | 60g typ.                 |
| continued on next page                 |           |                          |

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

Dimension Drawing (mm)

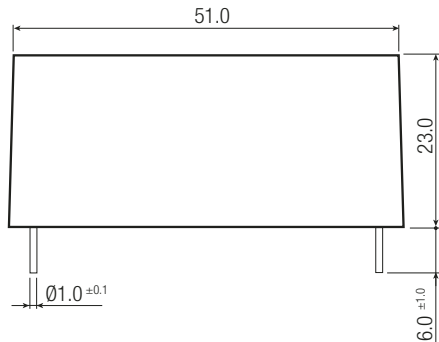
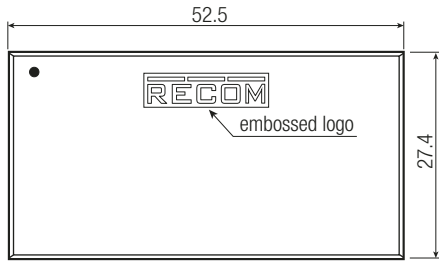


Pinning information

| Pin # | Single     |
|-------|------------|
| 1     | VAC in (N) |
| 2     | VAC in (L) |
| 4     | -Vout      |
| 5     | +Vout      |

Tolerance: xx.x= ±0.5mm  
xx.xx= ±0.25mm

Recommended Footprint Details

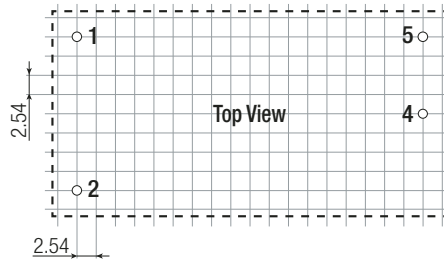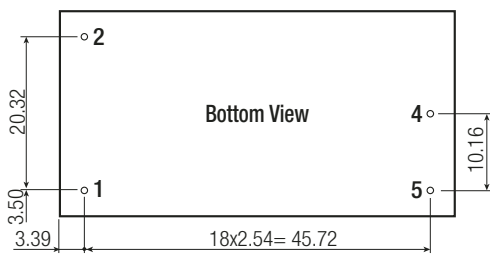

PACKAGING INFORMATION

| Parameter                   | Type           | Value                 |
|-----------------------------|----------------|-----------------------|
| Packaging Dimension (LxWxH) | tube           | 490.0 x 56.0 x 40.0mm |
| Packaging Quantity          | tube           | 15pcs                 |
| Storage Temperature Range   |                | -40°C to +85°C        |
| Storage Humidity            | non-condensing | 20% to 90% RH max.    |

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.