



WPD136M6C-001

Multi-Band Mobile Antenna

136-174 MHz/380-520 MHz/760-870 MHz

Laird Connectivity's patent-pending WPD136M6C-001 multi-band mobile antenna is a commercial, heavy-duty vehicular antenna. It has an omnidirectional pattern and is vertically polarized with a 50Ω match. It also has excellent quality and RF performance and is specifically designed as a full spectrum public safety voice and data communications antenna.

FEATURES AND BENEFITS

- High-performance, broad-banded, multi-band coverage
- Heavy-duty design
- Injection molded housing and base
- No base radiators (all enclosed coils)
- Solid brass chrome-plated ferrules with dual set screw lock

APPLICATIONS

- General analog and digital voice/data communications
- VHF (high), UHF, 700/800
- Tetra PMR and P25 public safety
- Transportation, utilities, government, military, PAMR, commercial and industry, oil and gas

ELECTRICAL SPECIFICATION

Model Name	WPD136M6C-001		
Operating Frequency (MHz)	136-174	380-520	760-870
VSWR - Max	≤ 2.5:1		
Gain (dBi)	Unity		
Peak Gain (dBi) - Azimuth Cut (Phi = 0°)	-0.7	-3.7	3.1
Peak Gain (dBi) - Elevation Cut (Phi = 0°)	0.2	4.8	8.1
Nominal Impedance (Ohms)	50		
Max Power - Ambient 25°C (W)	100		
Polarization	Vertical		
Pattern	Omnidirectional		
Vertical Plane 3 dB Beamwidth	90°	40°	60°
Horizontal Plane 3 dB Beamwidth Port 1	360°	360°	360°

MECHANICAL SPECIFICATION

Dimensions - round base x height - cm (inches)	6.35 x 50.8 (2.5 x 20.0)
Connector	NMO
Radome Material	High impact PC/ABS

ENVIRONMENTAL SPECIFICATION

Ingress Protection Rating	IP66
Material Substance Compliance	RoHS

VHF BAND (136-174 MHz)

PEAK GAIN (dBI)	AZIMUTH PATTERN	ELEVATION PATTERN
136 MHz	-2.4	0.2
146 MHz	-2.7	-1.8
156 MHz	-0.7	-3.1
174 MHz	-3.5	-4.1

UHF BAND (380-520 MHz)


PEAK GAIN (dBI)	AZIMUTH PATTERN	ELEVATION PATTERN
380 MHz	-11.3	6.1
400 MHz	-7.0	7.7
440 MHz	-4.1	4.8
460 MHz	-3.7	3.0
500 MHz	-5.5	3.3
520 MHz	-6.6	3.5

UHF BAND (760-870 MHz)


PEAK GAIN (dBI)	AZIMUTH PATTERN	ELEVATION PATTERN
760 MHz	3.1	3.1
815 MHz	-0.2	7.9
870 MHz	-8.8	8.1

RADIATION PATTERNS

156 MHz

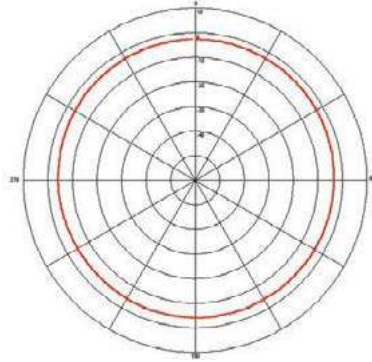


Azimuth Cut, $\Phi=0^\circ$

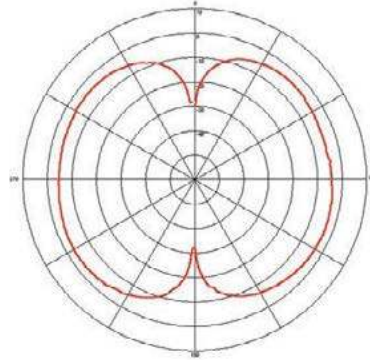


Elevation Cut, $\Phi=90^\circ$

440 MHz

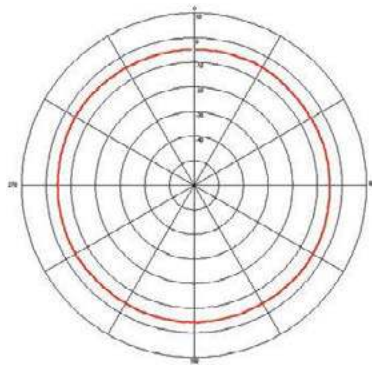


Azimuth Cut, $\Phi=0^\circ$

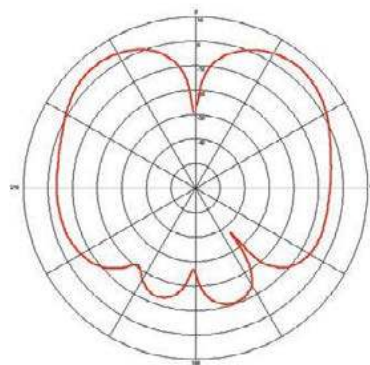


Elevation Cut, $\Phi=90^\circ$

815 MHz

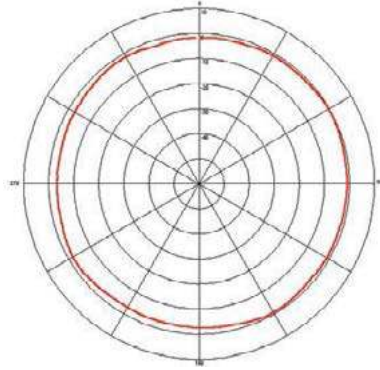

Azimuth Cut, $\Phi=0^\circ$

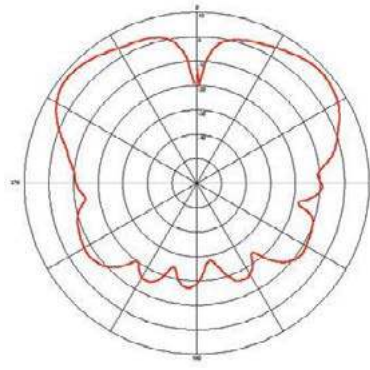

Elevation Cut, $\Phi=90^\circ$

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, and TE connectivity (logo) are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE Connectivity product is installed. Useful lifetime of the original end product may vary but is not warranted to exceed one (1) year from the original date of the end product purchase.

©2022 TE Connectivity. All Rights Reserved.

08/22 Original