

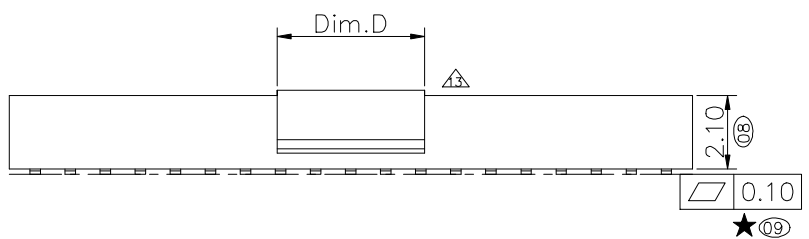
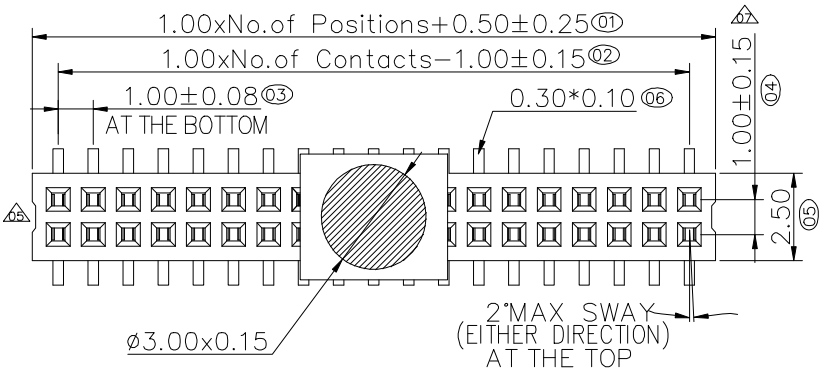


F
E
D
C
B
A

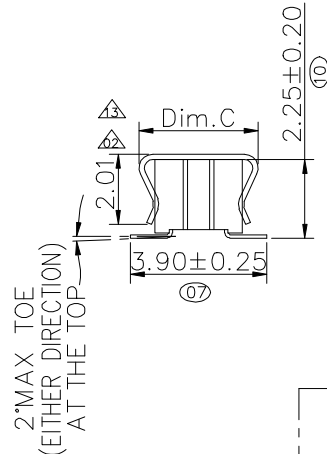

Dim.D	Dim.C	NOTE
3.00mm	3.85mm	03 Pin
4.20mm	3.40mm	04~40Pin




REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
13	△△	產線反應自物料生產產品時CAP會重疊，變更CAP (R-1020701)	2020.08.24	何東華
14	△△	依業務要求增加車載料號	2021.09.24	何東華


Specifications
 Current Rating: 1.0Amp △
 Insulation Resistance: 1000MΩMin. △
 Dielectric Withstanding Voltage: 300VAC △
 Contact Resistance: 20mΩMax. △
 Operating Temperature: -40°C to +105°C
 Max Process Temp: 230°C for 30~60 sec.
 Materials
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
 ☆All materials must meet Greenconn hazardous substances control standards.
 "★": Critical Characteristics. indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications
 "☆": Safety Features. indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

Greenconn P/N	Customer	Remarks
CSCC211-0202A001C1AC	G005	Automotive Connector
CSCC211-0202A001C1AD		


Ordering Information

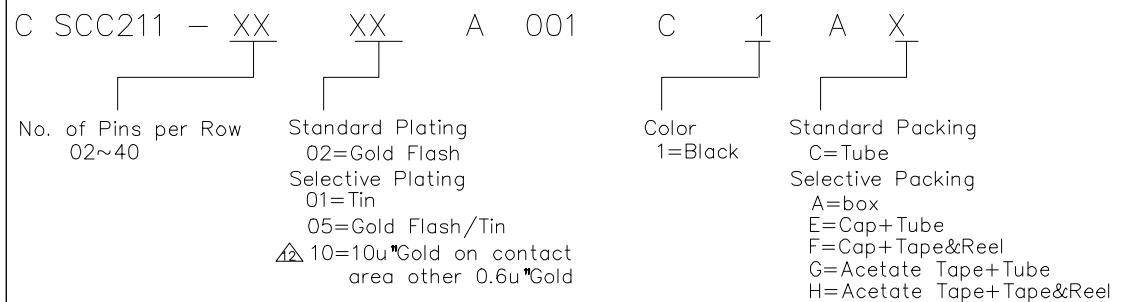

Recommended P.C.Board Layout For Bottom Entry (Tolerance: ±0.05)

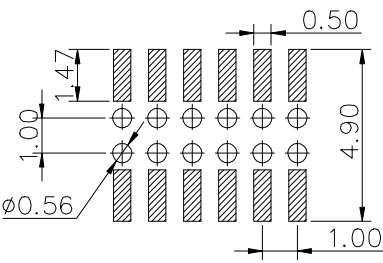

Recommended P.C.Board Layout For Top Entry (Tolerance: ±0.05)

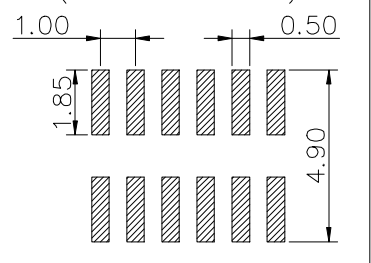

<p>Website: www.greenconn.com E-mail: sales@greenconn.com</p>	3RD. ANG PROJ. 	GENERAL TOLERANCE		DESIGNED: 何東華	DATE: 2021.09.24	DWG. NO. △△ CSCC211-CA1CA PART NO. △△ CSCC211-XXXX A001C1AX	TITLE: 1.00 FEMALE HEADER DUAL ROWS SMT TYPE CONNECTOR
		X.±5.0'	X.±0.30	CHECKED: 张春进	DATE: 2021.09.24		
		.X.±3.0'	.X.±0.25	APPROVED: 邱国廷	DATE: 2021.09.24		
REV. 14	UNIT. mm	SCALE. 5:1	PAGE. 1/1	.XX.±2.0'	.XX.±0.15		
				.XXX.±1.0'	.XXX.±0.10		