

CUSTOMER PRINT


PART NUMBER: CARA6C806PXXX90

NOTES:

1. FINISHED PRODUCT TO BE COILED
2. OVERMOLD BOOT MATERIAL: PVC, BLACK
3. ELECTRICAL TEST: 100% CONTINUITY
4. ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE

ASS'Y P/N	"X" DIM
CARA6C806P03990	3 FT. 3 1/2 IN. ±2 IN. [1M ±50.8mm]
CARA6C806P07990	6 FT. 7 IN. ±2 IN. [2M ±50.8mm]
CARA6C806P19790	16 FT. 5 IN. ±4 IN. [5M ±101.6mm]
CARA6C806P39490	32 FT. 9 3/4 IN. ±8 IN. [10M ±203.2mm]
CARA6C806PXXX90	

CABLE CUT LENGTH IN "INCHES"

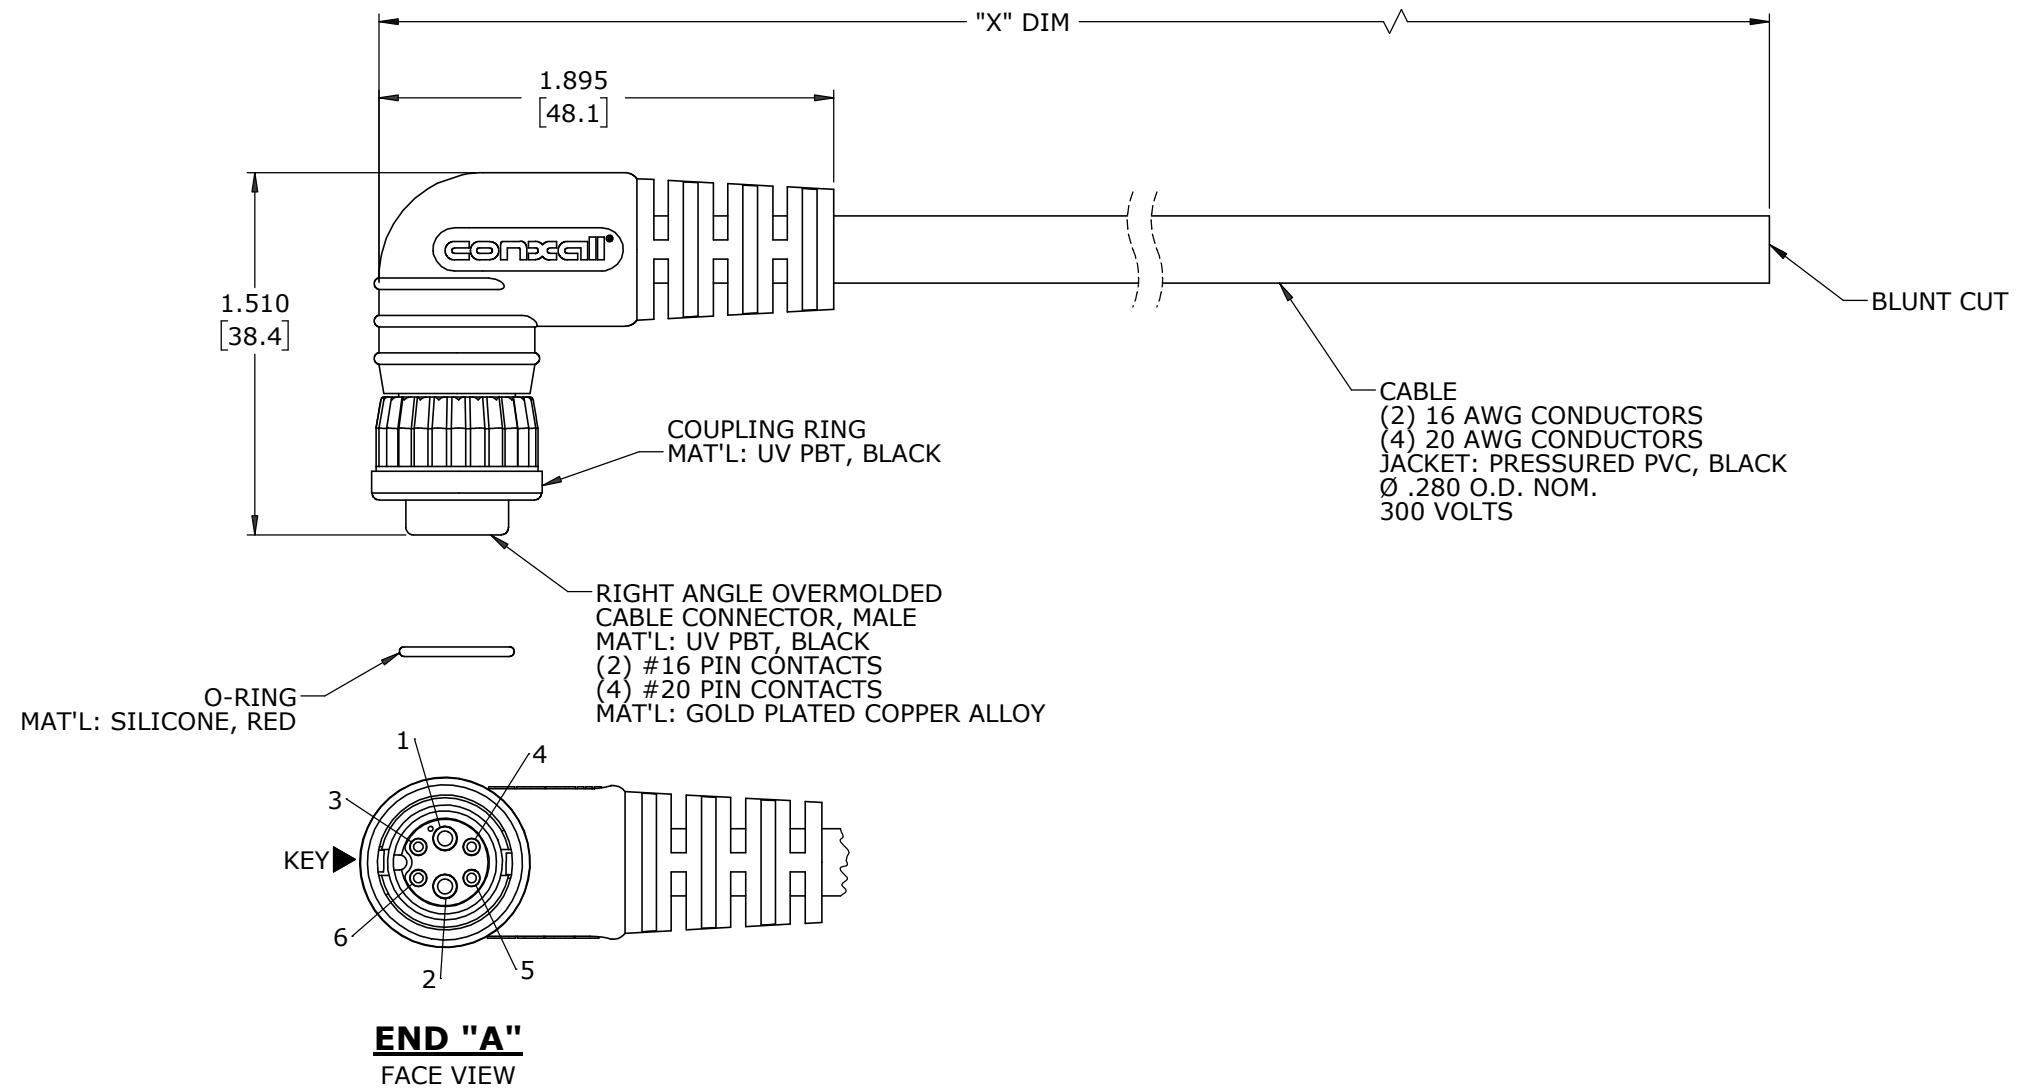

WIRE COLOR CODE					
POS. 1	POS. 2	POS. 3	POS. 4	POS. 5	POS. 6
BLK	WHT	RED	BLU	GRN	YEL
16 AWG	16 AWG	20 AWG	20 AWG	20 AWG	20 AWG

DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS UNLESS INDICATED

**CUSTOMER APPROVAL**

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: \_\_\_\_\_  
DATE: \_\_\_\_\_

**RoHS COMPLIANT**

A	MA	07-28-21	DRAWING CREATED PER DOR 21-109361DS		
REV.	INIT.	DATE	DESCRIPTION		
	MA	07-28-21	ORIG. DRAWN BY: MA DATE: 07-28-21 CHECKED BY: _____ APPROVED BY: _____ TITLE: CABLE ASSEMBLY, RA 2#16/4#20 PIN CONTACTS MINI-CON-X MIXED SIGNAL FLEX OM STANDARD PRODUCT CUSTOMER: _____ PART NUMBER: CARA6C806PXXX90 REV A		
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			601 E. WILDWOOD VILLA PARK, IL 60181 		
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			SCALE	SIZE	SHEET
			NTS	B	1 OF 1
			FILE:	DIRECTORY:	PART NUMBER:
			CARA6C806PXXX90	SLW	CARA6C806PXXX90