

# MEV Series

## Metal Film Precision MELF Resistor



### FEATURES

- AEC-Q200 Compliance
- Thin film technology
- Excellent overall stability
- Sn termination on Ni barrier layer
- Tight tolerance down to  $\pm 0.1\%$
- Extremely low TCR down to  $\pm 10\text{ppm}/^\circ\text{C}$
- High power rating up to 1 Watt
- SMD enabled structure
- Lead-free and RoHS compliant

### APPLICATIONS

- Automotive
- Industrial
- Telecommunication
- Medical Equipment
- Measurement/Testing Equipment


### SERIES SPECIFICATIONS

Size	Power (W) @ 70°C	Max. Oper. Volt.	Max. Overload Voltage	Resistance ( $\Omega$ )					TCR (ppm)
				$\pm 0.1\%$	$\pm 0.25\%$	$\pm 0.5\%$	$\pm 1\%$	$\pm 5\%$	
MEV02	0.2	200V	400V	100 $\Omega$ -56K	100 $\Omega$ -56K 100 $\Omega$ -82K	100 $\Omega$ -56K 49.9 $\Omega$ -200K	100 $\Omega$ -56K 49.9 $\Omega$ -390K	100 $\Omega$ -56K	$\pm 15$ $\pm 25$
	0.3	200V	400V			8.2 $\Omega$ -1M	8.2 $\Omega$ -1M 40 $\Omega$ -1M	8.2 $\Omega$ -1M 40 $\Omega$ -1M	$\pm 50$ $\pm 100$
MEV04	0.25, 0.4	200V	400V	10 $\Omega$ -300K	10 $\Omega$ -300K	10 $\Omega$ -300K	10 $\Omega$ -300K	10 $\Omega$ -300K	$\pm 15$
				10 $\Omega$ -1M	10 $\Omega$ -1M	10 $\Omega$ -3.4M	4.02 $\Omega$ -3.4M	4.02 $\Omega$ -3.4M	$\pm 25$
				10 $\Omega$ -1M	1 $\Omega$ - 1M	1 $\Omega$ - 3.4M $\Omega$	0.2 $\Omega$ -3.4M 0.1 $\Omega$ -1M	0.2 $\Omega$ -3.4M 0.1 $\Omega$ -1M	$\pm 50$ $\pm 100$
MEV07	1.0	350V	700V	10 $\Omega$ -300K	10 $\Omega$ -300K	10 $\Omega$ -300K	10 $\Omega$ -300K	10 $\Omega$ -300K	$\pm 15$
				10 $\Omega$ -1M	10 $\Omega$ -1M	10 $\Omega$ -3.4M	4.02 $\Omega$ -3.4M	4.02 $\Omega$ -3.4M	$\pm 25$
				10 $\Omega$ -1M	1 $\Omega$ - 1M	1 $\Omega$ - 3.4M $\Omega$	0.2 $\Omega$ -3.4M 0.1 $\Omega$ -1M	0.2 $\Omega$ -3.4M 0.1 $\Omega$ -1M	$\pm 50$ $\pm 100$

### CHARACTERISTICS

<b>Oper. Temp. Range</b>	-55°C to +155°C
<b>Max. resistance change</b>	$\leq 0.5\%$ at P70 for resistance range, $\Delta R/R$ max., after 1000 h
<b>Storage Temperature</b>	15~28°C; Humidity < 80%RH
<b>Rated Voltage</b>	$\sqrt{P \cdot R}$ or Max. Operating Voltage whichever is lower

#### Derating




(continued)

# MEV Series


## Metal Film Precision MELF Resistor

### SOLDERING

#### IR Reflow Soldering


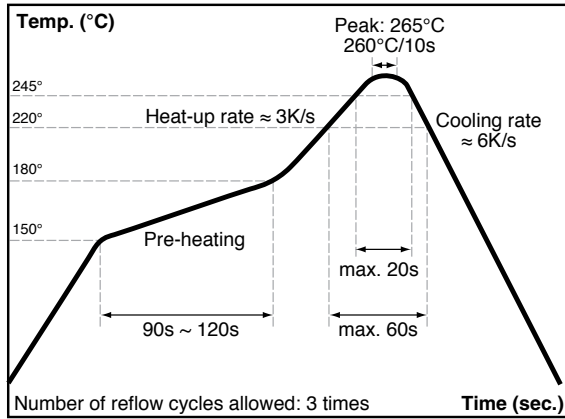


#### Wave Soldering (Flow Soldering)

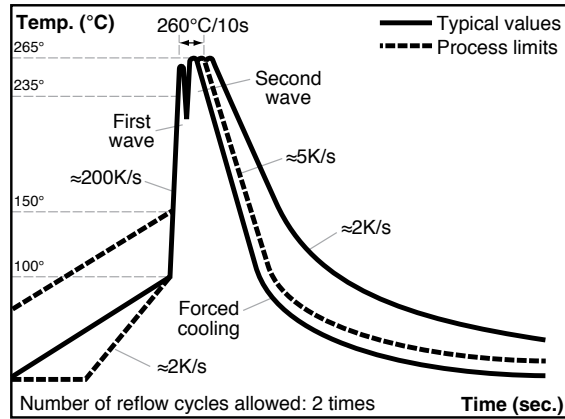

- (1) Time of IR reflow soldering at maximum temperature point 260°C: 10s
- (2) Time of wave soldering at maximum temperature point 260°C: 10s
- (3) Time of soldering iron at maximum temperature point 410°C: 5s


### DIMENSIONS

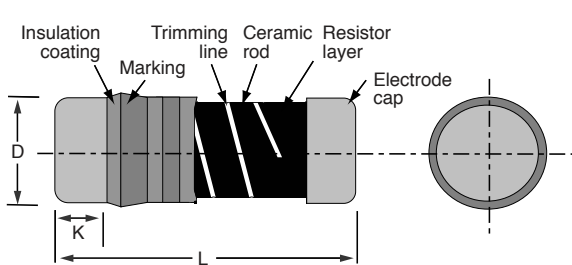

Size	L (mm)	D (mm)	K (mm)	A (mm)	B (mm)	C (mm)	Weight (g) (per 1,000)
MEV02	2.20 ±.10	1.10 ±.10	0.45 ±.05	1.5	0.8	1.0	7.7
MEV04	3.50 ±.2	1.40 ±.15	0.8 ±.1	1.6	1.2	1.6	18.7
MEV07	5.90 ±.2	2.20 ±.20	1.3 ±.1	2.4	2.4	3.0	80.9

### TAPE AND REEL

(mm)

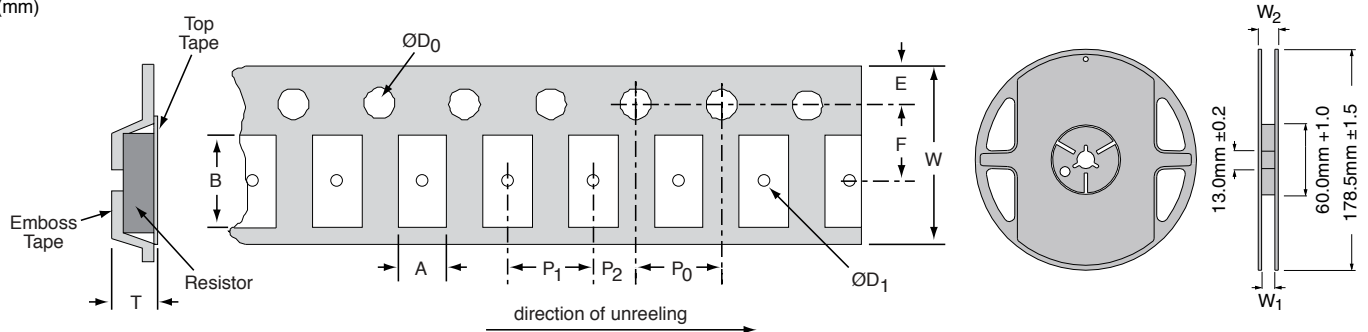

	A	B	W	W	F	P <sub>0</sub>	P <sub>1</sub>	P <sub>2</sub>	D <sub>0</sub>	D <sub>1</sub>	T	W <sub>1</sub>	W <sub>2</sub>	Qty.
MEV02	1.30 ±.1	2.40 ±.1	8.0 ±.1	1.75 ±.1	3.50 ±.05	4.00 ±.1	4.00 ±.1	2.00 ±.05	1.50 ±.1	0.9 min.	1.50 ±.1	9.0 ±.5	12.5 ±.5	3,000
MEV04	1.55 ±.1	3.65 ±.1	8.0 ±.1	1.75 ±.1	3.50 ±.05	4.00 ±.1	4.00 ±.1	2.00 ±.05	1.50 ±.1	0.9 min.	1.80 ±.1	9.0 ±.5	12.5 ±.5	3,000
MEV07	2.40 ±.1	6.15 ±.1	12.0 ±.1	1.75 ±.1	5.50 ±.05	4.00 ±.1	4.00 ±.1	2.00 ±.05	1.50 ±.1	1.4 min.	2.70 ±.1	13.0 ±.5	15.5 ±.5	2,000

# MEV Series

## Metal Film Precision MELF Resistor

### PERFORMANCE

Item	Requirement	Method
<b>TCR</b>	As Spec	JIS-C-5201-1 4.8; IEC-60115-1 4.8; -55°C~+125°C, 25°C is the reference temperature
<b>Short Time Overload</b>	10Ω-270KΩ: ±(0.1%+0.05Ω) <10Ω & >270KΩ: ±(0.15%+0.05Ω) 0102: ±(0.15%+0.05Ω)	JIS-C-5201-1 4.13; IEC-60115-1 4.13; RCWV*2.5 or Max. Overload Voltage whichever is lower for 5 seconds
<b>Insulation Resistance</b>	≥10G	JIS-C-5201-1 4.6; IEC-60115-1 4.6; Max. Overload Voltage for 1 minute
<b>Endurance</b>	10Ω-270KΩ: ±(0.25%+0.05Ω) <10Ω & >270KΩ: ±(0.5%+0.05Ω) 0102: ±(0.5%+0.05Ω)	JIS-C-5201-1 4.25; IEC-60115-1 4.25.1; MIL-STD-202 Method 108; 70±2°C, RCWV for 1000 hrs with 1.5 hrs "ON" and 0.5 hr "OFF"
<b>Biased Humidity</b>	10Ω-270KΩ: ±(0.5%+0.05Ω) <10Ω & >270KΩ: ±(1%+0.05Ω) 0102: ±(2%+0.05Ω)	MIL-STD-202 Method 103; 1000 hrs 85°C/85%RH 10% of operating power.
<b>High Temperature Exposure</b>	10Ω-270KΩ: ±(0.25%+0.05Ω) <10Ω & >270KΩ: ±(1%+0.05Ω) 0102: ±(1%+0.05Ω)	MIL-STD-202 Method 108 at +155°C for 1000 hrs
<b>Board Flex</b>	10Ω-270KΩ: ±(0.1%+0.05Ω) <10Ω & >270KΩ: ±(0.5%+0.05Ω) 0102: ±(0.5%+0.05Ω)	AEC-Q200-005; Bending once for 60 seconds with 2mm
<b>Solderability</b>	95% min. coverage	JIS-C-5201-1 4.17; IEC-60115-1 4.17; J-STD-002; 245±5°C for 3 seconds
<b>Resistance to Soldering Heat</b>	10Ω-270KΩ: ±(0.1%+0.05Ω) <10Ω & >270KΩ: ±(0.25%+0.05Ω) 0102: ±(0.25%+0.05Ω)	MIL-STD-202 Method 210; 260±5°C for 10 seconds
<b>Voltage Proof</b>	No breakdown or flashover	JIS-C-5201-1 4.7; IEC-60115-1 4.7; 1.42 times Max. Operating Voltage for 1 minute
<b>Leaching</b>	Individual leaching area ≤5% Total leaching area ≤10%	JIS-C-5201-1 4.18; IEC-60068-2-58 8.2.1; 260±5°C for 30 seconds
<b>Temperature Cycling</b>	10Ω-270KΩ: ±(0.25%+0.05Ω) <10Ω & >270KΩ: ±(0.5%+0.05Ω) 0102: ±(1%+0.05Ω)	JESD22 Method JA-104; -55°C to +125°C, 1000 cycles
<b>Mechanical Shock</b>	±(0.25%+0.05Ω)	MIL-STD-202 Method 213; Wave Form: Tolerance for half sine shock pulse. Peak value is 100g's. Normal duration (D) is 6.
<b>Vibration</b>	±(0.5%+0.05Ω)	MIL-STD-202 Method 204; 5 g's for 20 min., 12 cycles each of 3 orientations, 10-2000 Hz
<b>ESD</b>	±(0.5%+0.05Ω)	AEC-Q200-002; Human body, 2KV
<b>Resistance to Solvents</b>	No visible damage on appearance and marking.	MIL-STD-202 Method 215; Add Aqueous wash chemical - OKEM Clean or equivalent. Do not use banned solvents.
<b>Terminal Strength</b>	No broken	AEC-Q200-006; Force of 1.8kg for 60 seconds.
<b>Flammability</b>	No ignition of the tissue paper or scorching or the pinewood board	UL-94; V-0 or V-1 are acceptable. Electrical test not required.


# MEV Series

## Metal Film Precision MELF Resistor


### PULSE WITHSTANDING CAPACITY

The single impulse graph is the result of 50 impulses of rectangular shape applied at one-minute intervals. The limit of acceptance was a shift in resistance of less than 1% from the initial value. The power applied was subject to the restrictions of the maximum permissible impulse voltage graph shown.

Single Pulse (100Ω)

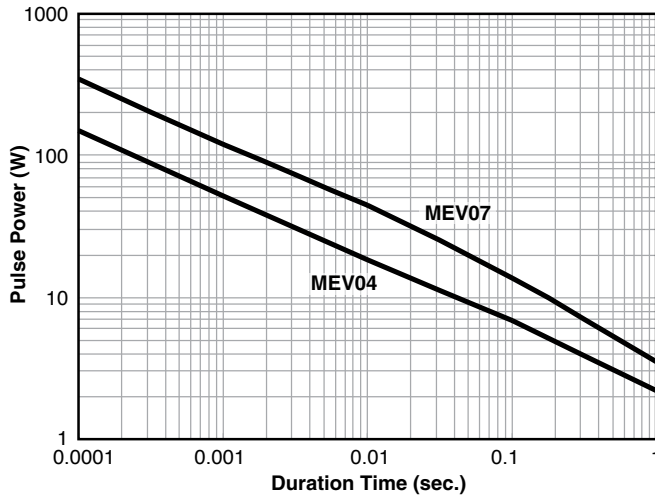


Single Pulse

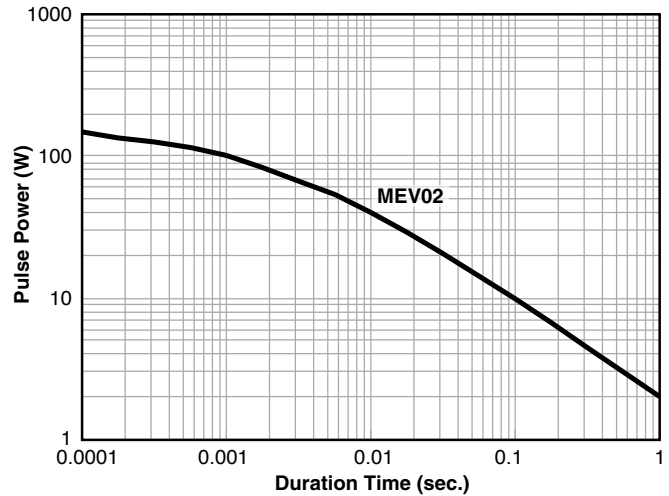


### CONTINUOUS PULSE

The continuous load graph was obtained by applying repetitive rectangular pulses where the pulse period was adjusted so that the average power dissipated in the resistor was equal to its rated power at 70°C. Again the limit of acceptance was a shift in resistance of less than 1% from the initial value.

Continuous Pulse (100Ω)

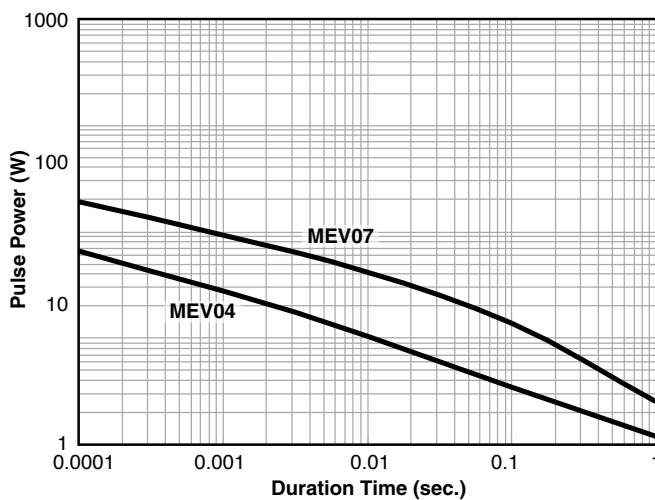

Pulse Voltage (100Ω)

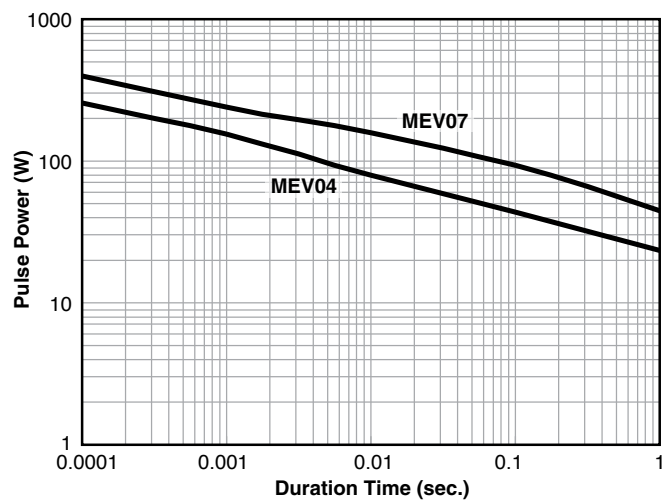


# MEV Series


## Metal Film Precision MELF Resistor

### CONTINUOUS PULSE

MEV02 Series Continuous Pulse

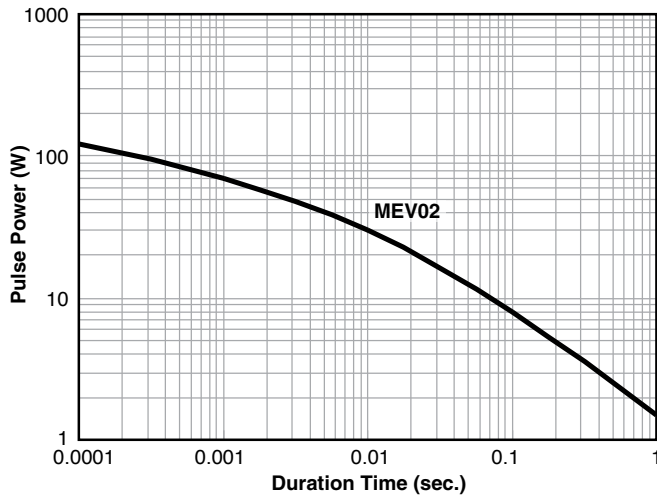

MEV02 Series Pulse Voltage(100 Ohm)

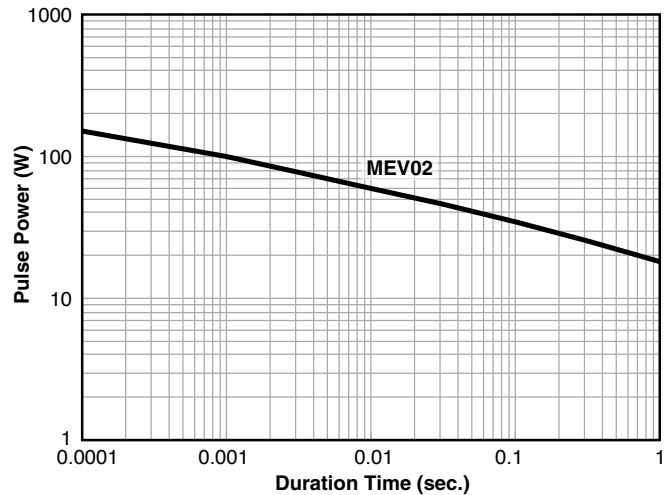


### FREQUENCY BEHAVIOR


Resistors are designed to function according to ohmic laws. This is basically true of resistors for frequencies up to 100kHz. At higher frequencies, there is an additional contribution to the impedance by an ideal resistor switched in series with a coil and both switched parallel to a capacitor. The values of the capacitance and inductance are mainly determined by the dimensions of the terminations and the conductive path length.

The environment surrounding components has a large influence on the behavior of the component on the printed-circuit board.

Frequency vs. Impedance MEV04

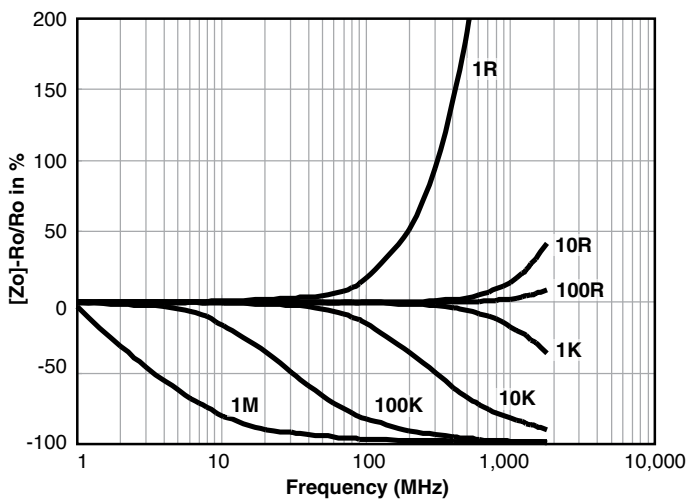

Frequency vs. Phase Angle MEV04

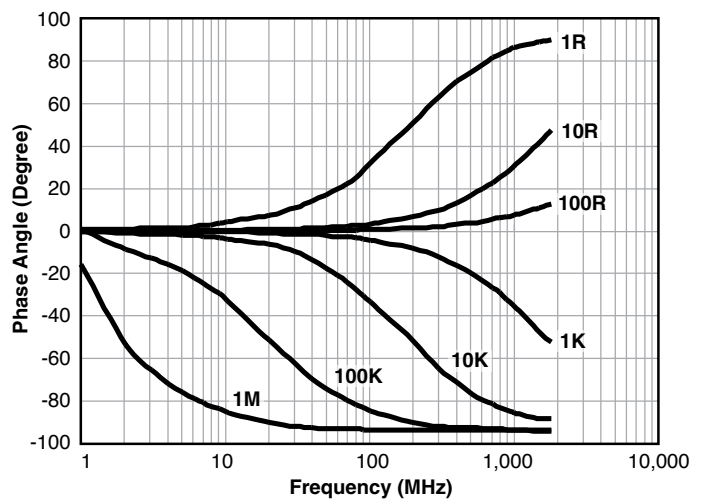


# MEV Series


## Metal Film Precision MELF Resistor

### FREQUENCY BEHAVIOR

Frequency vs. Impedance MEV07

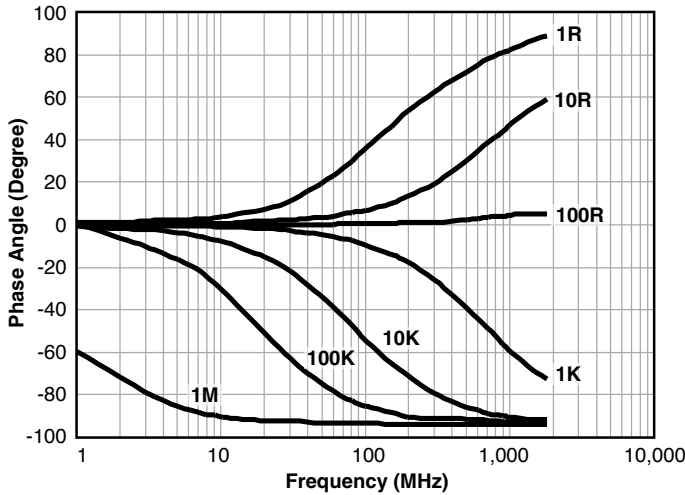


Frequency vs. Phase Angle MEV07

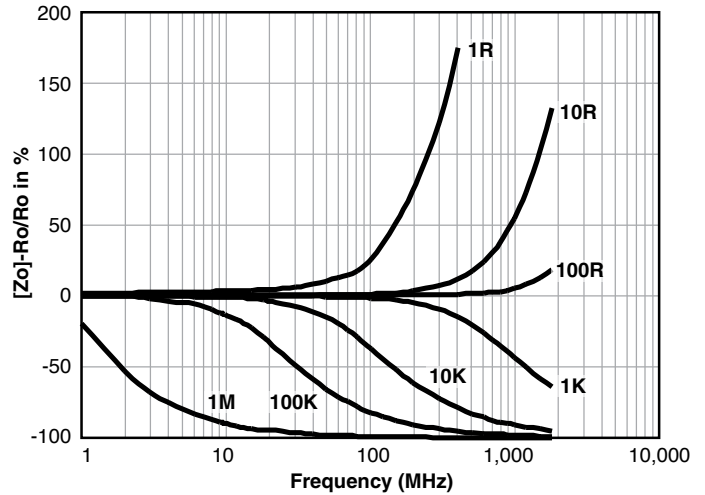


### LIGHTNING SURGE

Resistors are tested in accordance with IEC 60115-1 using both 1.2/50 $\mu$ s and 10/700 $\mu$ s pulse shapes. The limit of acceptance is a shift in resistance of less than 0.5% from the initial value.

1.2/50 $\mu$ s Lightning Surge

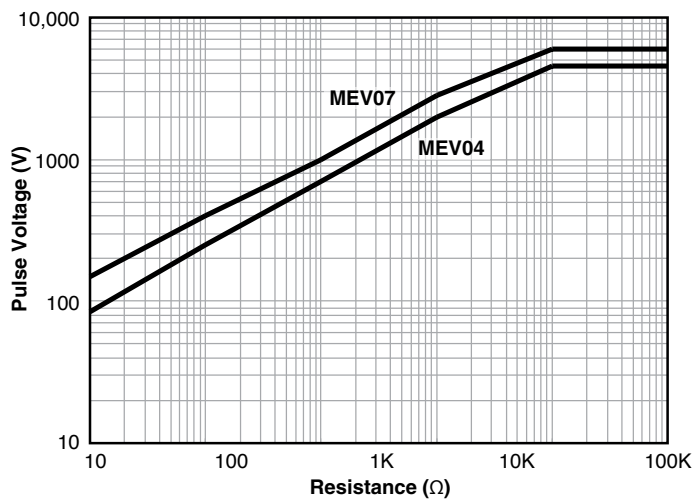

10/700 $\mu$ s Lightning Surge

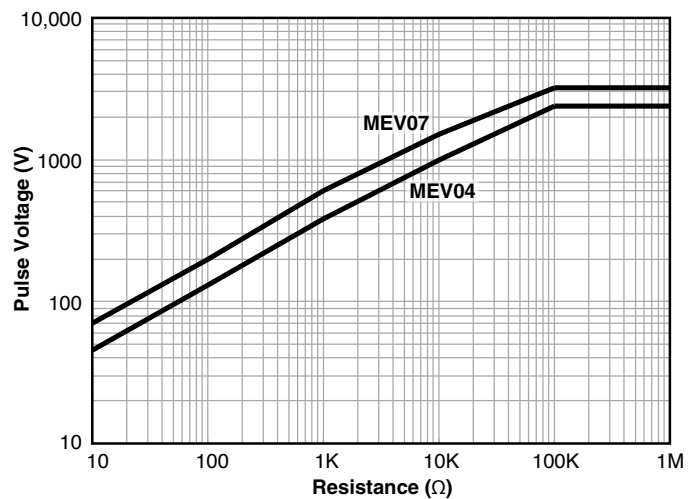


# MEV Series


## Metal Film Precision MELF Resistor

### LIGHTNING SURGE



#### 1.2/50µs Lightning Surge

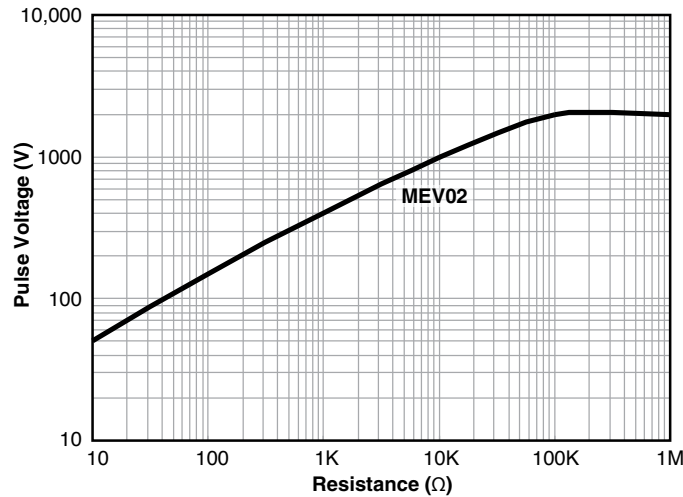

#### 10/700µs Lightning Surge

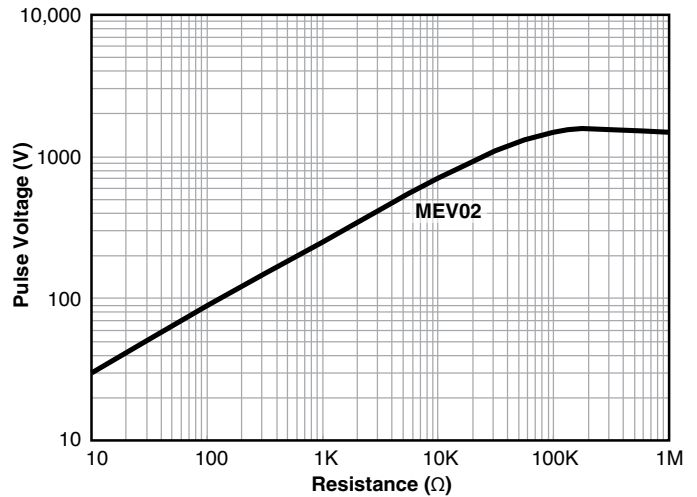

### ORDERING INFORMATION

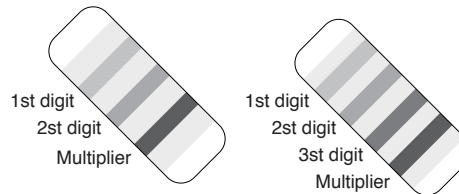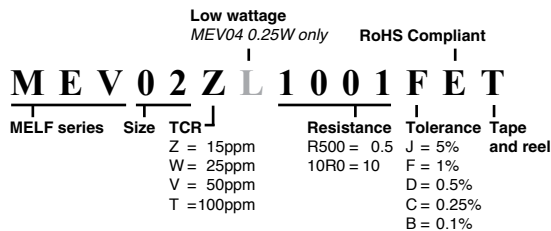

Resistance more than two significant figures (<1R) or more than three significant figures (>1R) will not provide color code.

Silver	-	10 <sup>-2</sup>
Gold	-	10 <sup>-1</sup>
Black	0	10 <sup>0</sup>
Brown	1	10 <sup>1</sup>
Red	2	10 <sup>2</sup>
Orange	3	10 <sup>3</sup>
Yellow	4	10 <sup>4</sup>
Green	5	10 <sup>5</sup>
Blue	6	10 <sup>6</sup>
Violet	7	10 <sup>7</sup>
Grey	8	10 <sup>8</sup>
White	9	10 <sup>9</sup>

#### Resistance Tolerance

Tolerance	Code	1.0	1.1	1.2	1.3	1.5	1.6	1.8	2.0	2.2	2.4	2.7	3.0	3.3	3.6	3.9	4.3	4.7	5.1	5.6	6.2	6.8	7.5	8.2	9.1
±5%	E-24	1.0	1.1	1.2	1.3	1.5	1.6	1.8	2.0	2.2	2.4	2.7	3.0	3.3	3.6	3.9	4.3	4.7	5.1	5.6	6.2	6.8	7.5	8.2	9.1
±1%	E-96	1.00	1.02	1.05	1.07	1.10	1.13	1.15	1.18	1.21	1.24	1.27	1.30	1.33	1.37	1.40	1.43	1.47	1.50	1.54	1.58	1.62	1.65	1.69	1.74
		1.78	1.82	1.87	1.91	1.96	2.00	2.05	2.10	2.15	2.21	2.26	2.32	2.37	2.43	2.49	2.55	2.61	2.67	2.74	2.80	2.87	2.94	3.01	3.09
		3.16	3.24	3.32	3.40	3.48	3.57	3.65	3.74	3.83	3.92	4.02	4.12	4.22	4.32	4.42	4.53	4.64	4.75	4.87	4.99	5.11	5.23	5.36	5.49
±0.5%	E-192	5.62	5.76	5.90	6.04	6.19	6.34	6.49	6.65	6.81	6.98	7.15	7.32	7.50	7.68	7.87	8.06	8.25	8.45	8.66	8.87	9.09	9.31	9.53	9.76
		10.0	10.1	10.2	10.4	10.5	10.6	10.7	10.9	11.0	11.1	11.3	11.4	11.5	11.7	11.8	12.0	12.1	12.3	12.4	12.6	12.7	12.9	13.0	13.2
		13.3	13.5	13.7	13.8	14.0	14.2	14.3	14.5	14.7	14.9	15.0	15.2	15.4	15.6	15.8	16.0	16.2	16.4	16.5	16.7	16.9	17.2	17.4	17.6
±0.25%	E-192	17.8	18.0	18.2	18.4	18.7	18.9	19.1	19.3	19.6	19.8	20.0	20.3	20.5	20.8	21.0	21.3	21.5	21.8	22.1	22.3	22.6	22.9	23.2	23.4
		23.7	24.0	24.3	24.6	24.9	25.2	25.5	25.8	26.1	26.4	26.7	27.1	27.4	27.7	28.0	28.4	28.7	29.1	29.4	29.8	30.1	30.5	30.9	31.2
±0.1%	E-192	31.6	32.0	32.4	32.8	33.2	33.6	34.0	34.4	34.8	35.2	35.7	36.1	36.5	37.0	37.4	37.9	38.3	38.8	39.2	39.7	40.2	40.7	41.2	41.7
		42.2	42.7	43.2	43.7	44.2	44.8	45.3	45.9	46.4	47.0	47.5	48.1	48.7	49.3	49.9	50.5	51.1	51.7	52.3	53.0	53.6	54.2	54.9	55.6
		56.2	56.9	57.6	58.3	59.0	59.7	60.4	61.2	61.9	62.6	63.4	64.2	64.9	65.7	66.5	67.3	68.1	69.0	69.8	70.6	71.5	72.3	73.2	74.1
		75.0	75.9	76.8	77.7	78.7	79.6	80.6	81.6	82.5	83.5	84.5	85.6	86.6	87.6	88.7	89.8	90.9	92.0	93.1	94.2	95.3	96.5	97.6	98.8