


NOTES:

1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. PRODUCT SPECIFICATION: NOT REQUIRED
4. PACKAGING: NOT REQUIRED
5. MATES WITH: CUSTOMER SPECIFIC COMPONENT

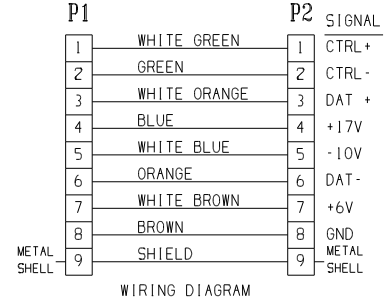

MATERIAL NO.	CABLE LENGTH
84901-0301	.6M +13mm-0mm 2'0" +.50"-0"
84901-0302	2M +42mm-0mm 6'7" +1.65"-0"
84901-0303	5M +102mm-0mm 16'5" +4.00"-0"
84901-0304	10M +152mm-0mm 32'10" +6.00"-0"
84901-0305	15M +152mm-0mm 49'2" +6.00"-0"
84901-0306	30M +152mm-0mm 98'5" +6.00"-0"

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
10	1	LABEL	MYLAR	CHROME
9	1	O-RING SEAL	EPDM	BLACK
8	1	INSERT-SOCKET	NYLON	BLACK
7	8	CONTACT-SOCKET	BRASS	GOLD PLATED
6	1	COUPLING RING, FEMALE	STAINLESS STEEL	PASSIVATED
5	1	INSERT-PIN	NYLON	BLACK
4	8	CONTACT-PIN	BRASS	GOLD PLATED
3	1	COUPLING RING, MALE	STAINLESS STEEL	PASSIVATED
2	2	OVERMOLD	PVC	GRAY
1	1	SHIELDED HIGH FLEX CAT 5E CABLE, 26AWG	PVC JACKET	GRAY

EC NO. RELEASED DRWG: RS 03-30-05 CH:K1 APPR:	QUALITY SYMBOLS MAJOR CRITICAL SPC	GENERAL TOLERANCES: (UNLESS SPECIFIED) 4 PLACES ±.0015 3 PLACES ±.038 ±.005 2 PLACES ±.13 ±.01 1 PLACE ±.3 ANGULAR: ±2°	SCALE 2:1 DESIGN UNITS <input type="checkbox"/> mm <input checked="" type="checkbox"/> INCH DRAWN BY & DATE R.STONE 02-21-05 CHECKED BY & DATE APPROVED BY & DATE	THIRD ANGLE PROJECTION TITLE: MICRO-C SS, M12 MALE SP KEY TO M12 FEMALE SP KEY, 8/C, 26AWG HIGH FLEX MOLEX INCORPORATED	PROJECT NO. PDR 05-28 DIMENSIONS: <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH <input type="checkbox"/> mm <input type="checkbox"/> INCH ONLY SHEET NO. 1 OF 1 REVISE ON CAD ONLY
	CAD FILENAME SD-84901-003 MATERIAL NO. SEE CHART DRAWING NO. SD-84901-003 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	SHEET NO. 1 OF 1 SIZE B			