


## HC-B 24-TFQ-76/O1STM32S

Order No.: 1645121

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1645121>

HEAVYCON B24 sleeve housing, for double locking latch, height: 76 mm, with 1 x M32 thread, lateral cable outlet

### Commercial data

|                          |                                                                                                       |
|--------------------------|-------------------------------------------------------------------------------------------------------|
| GTIN (EAN)               | <br>4 017918 913038 |
| sales group              | D002                                                                                                  |
| Pack                     | 10 pcs.                                                                                               |
| Customs tariff           | 85389099                                                                                              |
| Catalog page information | Page 498 (PC-2009)                                                                                    |

### Product notes

WEEE/RoHS-compliant since:  
03/01/2006

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data


#### General data

|        |                                                 |
|--------|-------------------------------------------------|
| Note   | For contact inserts HC-B24, BB46, D64, DD108, M |
| Design | B24                                             |
| Height | 76 mm                                           |
| Width  | 43 mm                                           |
| Length | 120 mm                                          |

|                                 |                          |
|---------------------------------|--------------------------|
| Housing type                    | Sleeve housings          |
| Locking type                    | For double locking latch |
| Cable exit                      | Lateral                  |
| Type of the screw connection    | 1x M32                   |
| Degree of protection            | IP65                     |
| Ambient temperature (operation) | -40 °C ... 125 °C        |
| Housing material                | Aluminum, die-cast       |
| Housing surface material        | Powder-coated, gray      |

### Diagrams/Drawings

Dimensioned drawing

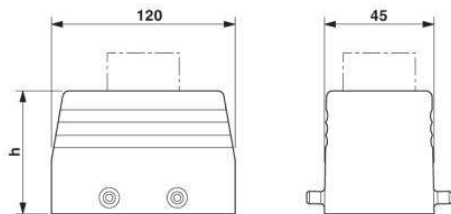

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;