
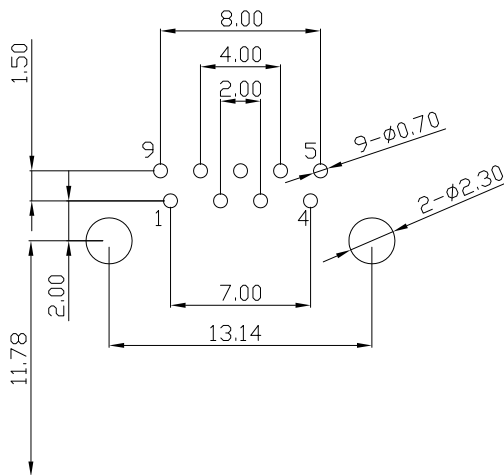




REV.	DATE	DESCRIPTION
01	Apr. 25, '19	1st RELEASE

A
B
C
D
E
F





SPECIFICATIONS:

- CONTACT CURRENT RATING: 1.5 AMPERES.
- DIELECTRIC WITHSTANDING VOLTAGE: AC 500V AT SEA LEVEL
- INSULATION RESISTANCE: 1000MΩ MIN.
- CONTACT RESISTANCE: 30mΩ MAX
- MECHANICAL CHARACTERISTICS:
 - MATING FORCE: 3.57Kg MAX.
 - UNMATING FORCE: 1.02Kg MIN.
 - DURABILITY: 1500 CYCLES MIN.
- OPERATING TEMPERATURE: -55° TO +85°
- UNSPECIFIED TOLERANCE: .XX ±0.20
.X ±0.30

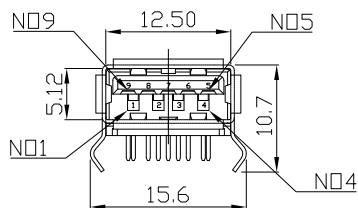

CONNECTOR FRONT EDGE
 SUGGESTED PCB LAYOUT
 (TOP VIEW) SCALE:2:1
 DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]



KUSB-9-3-9-3-1-2-02-XXX

- 9: USB 3.0
- 3: RIGHT ANGLE DIP
- NUMBER OF PIN
- SHELL PLATING
3: ALL Ni
- HOUSING COLOR
2: BLUE
- PIN PLATING
1: Au GOLD FLASH
- SERIAL NUMBER
- CUSTOMER CODE

ITEM	PART NAME	MATERIAL	QT,Y	REMARK
4	COVER	PBT 30%G	1	COLOR-BLUE
3	HOUSING	PBT 30%G	1	COLOR-BLUE
2	CONTACT	COPPER ALLOY	9	Au: GOLD FLASH, Ni: PLATED OVER ALL TIN: GOLD PIATING
1	SHELL	BRASS	1	Ni PLATING

PART NO		KUSB-9-3-9-3-1-2-02-XXX		
TITLE	USB 3.0 TYPE-A(F), DIP			
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	CINDY	VINCENT	Apr. 25, '19	1 of 1