
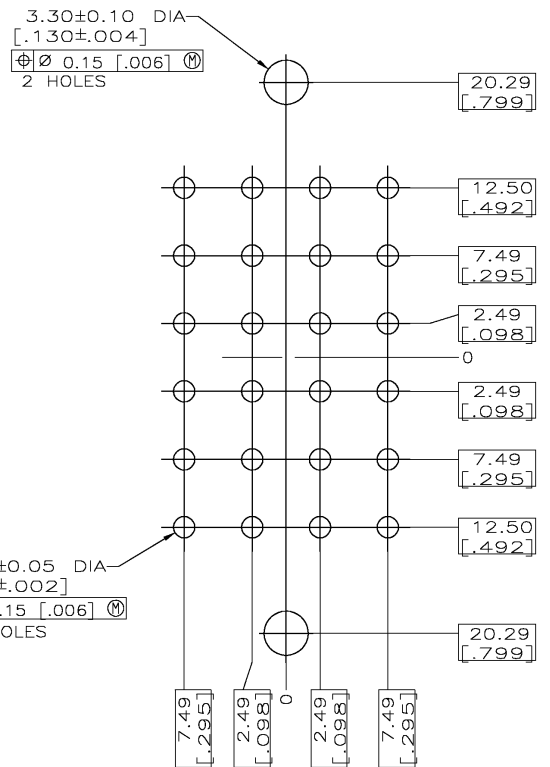
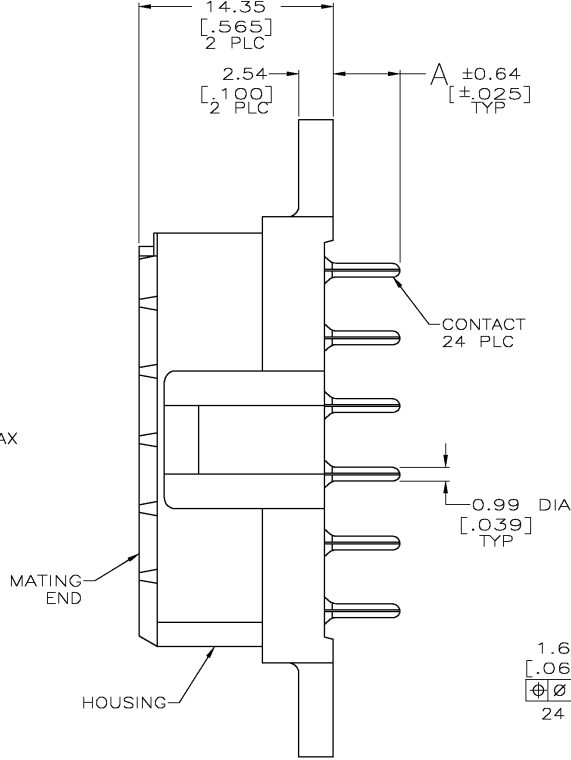


LOC	DISP	REVISIONS			
P	U/R	DESCRIPTION	DATE	DNW	APVD
BD	37	M	063B-0397-03	12MAY03	TK GS

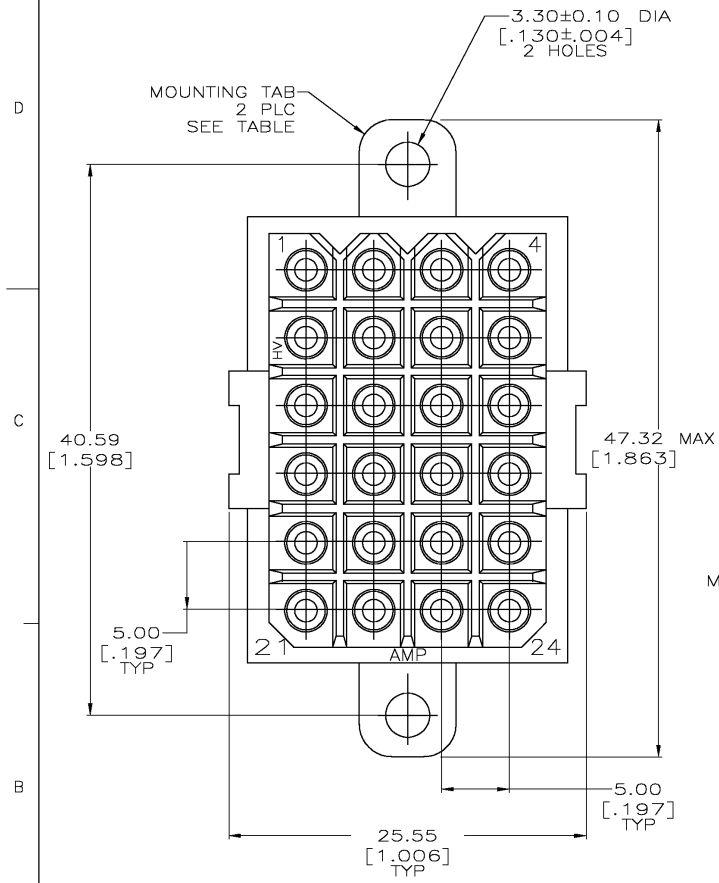

RECOMMENDED LAYOUT

- ▲ NYLON, UL 94-V0 RATED, RED.
- ▲ PHOSPHOR BRONZE.
- ▲ 3.81μm [.000150] MIN TIN-LEAD OVER 1.27μm [.000050] MIN NICKEL.
- ▲ 0.76μm [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END, 3.81μm [.000150] MIN TIN-LEAD FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER 1.27μm [.000050] MIN NICKEL.
- ▲ 3.81μm [.000150] MIN TIN OVER 1.27μm [.000050] MIN NICKEL.

4.60 [.181]	5	NO	207532-9
4.60 [.181]	5	YES	207532-8
9.68 [.381]	3	NO	207532-7
4.60 [.181]	4	NO	207532-4
4.60 [.181]	4	YES	207532-3
4.60 [.181]	3	NO	207532-2
4.60 [.181]	3	YES	207532-1
A		CONTACT FINISH MOUNTING TABS	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DNW	L SIPE	03/19/92	Tyco Electronics Corporation Harrisburg, Pa
DR	R STONE	3-25-92	
APVD	A TRAVIS	3-25-92	SOCKET HEADER ASSEMBLY, 24 POSITION, METRIMATE
NAME			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC 108-10033
INCHES			
MATERIAL		FINISH	APPLICATION SPEC
HOUSING: 1		CONTACT: SEE TABLE	RESTRICTED TO
CUSTOMER DRAWING		WEIGHT	SIZE: A2
			00779
			©-207532
			SCALE: 4:1
			SHEET 1 OF 1
			REV M