

NEMA 4X/IP66 Rated Wireless Access Point Enclosures

specifications

The Wireless Access Point (WAP) enclosure shall have both a NEMA 4X and an IP66 rating to provide protection in outdoor and industrial environments. The WAP enclosure shall provide protection against corrosion, windblown dust and rain, splashing water, and hose-directed water. The WAP enclosure shall be constructed of fiberglass and be capable of enclosing wireless access points from a variety of manufacturers. The WAP enclosure shall include an aluminum mounting plate and an outdoor/industrial connectivity accessory kit. The aluminum mounting plate shall allow installer to perform field modifications (i.e., drilling) on the enclosure. Optional NEMA 4X rated fittings in various sizes shall allow an installer to ingress/egress the enclosure while maintaining NEMA 4X rating. Enclosure shall include a pre-configured mounting template to allow a method of quickly positioning the mounting locations for wireless components. The WAP enclosure shall have provisions for padlocks to protect against tampering and theft.



NEMA 4X/IP66 Rated Wireless Access Point Enclosures

12" x 12" x 6":	PZNWE12
14" x 12" x 6":	PZNWE14
12" x 12" x 6" (Shielded):	PZNWE12S
14" x 12" x 6" (Shielded):	PZNWE14S

NEMA 4X Rated Fittings

.115" – .250":	PZNF1
.230" – .395":	PZNF2
.170" – .450":	PZNF3

NEMA 4X Rated Accessories

Drain and vent kit: PZNDVK

technical information

Standards:	Complies with NEMA 4X Complies with IP66 UL508A Listed as an Industrial Control Panel
Dimensions:	PZNWE12 and PZNWE12S: 12.0"H x 12.0"W x 6.0"D (304.8mm x 304.8mm x 152.4mm) PZNWE14 and PZNWE14S: 14.0"H x 12.0"W x 6.0"D (355.6mm x 304.8mm x 152.4mm)

key features and benefits

NEMA 4X and IP66 rating	Provides protection against corrosion, windblown dust and rain, splashing water, and hose-directed water
Fiberglass construction with aluminum mounting plate	Allows installer to perform field modifications (i.e. drilling) on the enclosure
Optional NEMA 4X rated fittings in various sizes	Allows installer to ingress/egress the enclosure while maintaining NEMA 4X rating
Pre-configured mounting template	Quickly and confidently identifies mounting hole locations
UL508A Listed as an Industrial Control Panel enclosure	Capable of mounting electrical junction boxes within enclosure to provide AC power for wireless access points
Connectivity accessories kit (PZNWE12 and PZNWE14)	Simplifies installation by including a two-position Mini-Com [®] outlet box, Mini-Com [®] TX6 [™] PLUS Jack Module, TX6 [™] PLUS Patch Cord, silicone sealant and grounding cable
Shielded connectivity accessories kit (PZNWE12S and PZNWE14S)	Simplifies installation by including a two-position Mini-Com [®] outlet box, Mini-Com [®] TX6 [™] PLUS Shielded Jack Module, TX6 [™] PLUS Shielded Patch Cord, silicone sealant and grounding cable
Provisions for padlocks	Allows the enclosure to be secured against tampering and theft
Optional NEMA 4X rated drain and vent kit	Allows enclosure to breathe to reduce chance of condensation while still maintaining NEMA 4X rating


applications

Panduit NEMA 4X/IP66 Rated Wireless Access Point Enclosures are used to protect a wireless network from tampering and theft by enclosing WAPs. These products are specifically designed for use in deploying a WAP in outdoor and industrial environments. The universal design of the


enclosures allows customization to accommodate most wireless access points. The NEMA 4X/IP66 Rated Wireless Access Point Enclosure can be customized to meet specific wireless LAN design specifications to provide a flexible, easy to use and install wireless solution.

NEMA 4X/IP66 Rated Wireless Access Point Enclosures

External Dimensions




Internal Dimensions

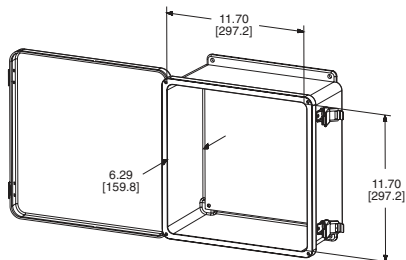

PZNWE12 and PZNWE12S




Designed for
Power over Ethernet Applications




Drain and Vent Kit
PZNDVK

External Dimensions




Internal Dimensions

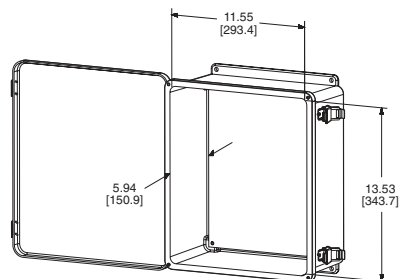

PZNWE14 and PZNWE14S



Designed for
Traditional AC Power Applications

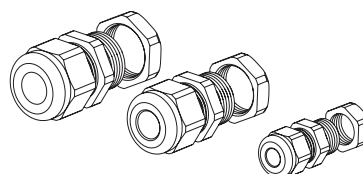

NEMA 4X Fittings
PZNF3, PZNF2, PZNF1

Dimensions are in inches [Dimensions in brackets are metric]

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com/ia
iaipanduit.com

PANDUIT[®]

©2016 Panduit Corp.
ALL RIGHTS RESERVED.
ZCSP14--WW-ENG
1/2016