


WG NO. 603225

UNIT OF MEASURE	A	B	C	D	E	L	MAX. BUNDLE DIA.	MIN. TENSILE STRENGTH
INCHES	.393	.501	.299	.325	.063	8.93	2.0	120 lbs.
MM	9.98	12.72	7.59	8.26	1.60	226.	50.8	54.43 kg.

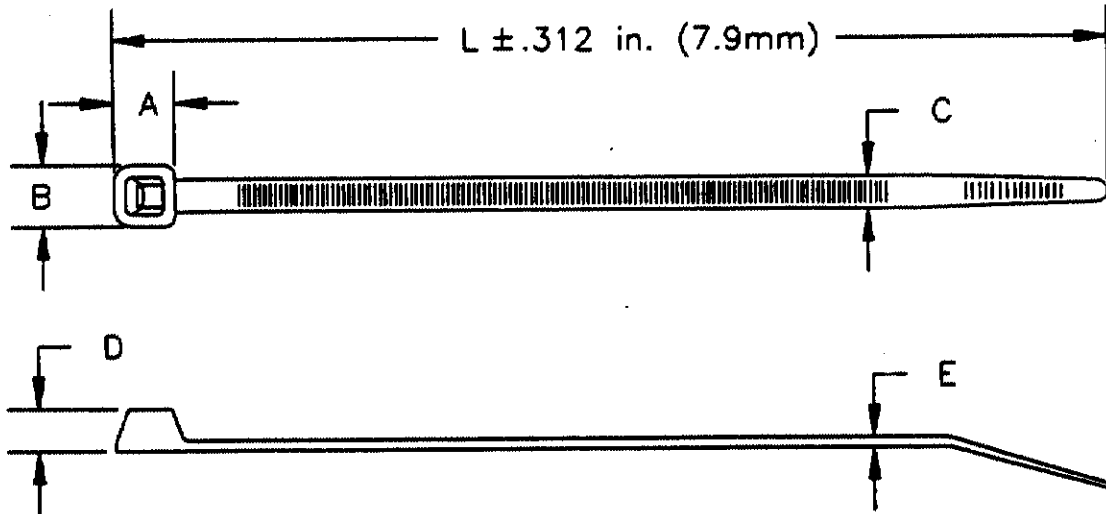

NOTES:

1. MOISTURIZED 1 TO 2.5% WATER.
 2. PACKAGED IN HEAT SEALED 3 MIL POLYBAG WITH LABEL PER DWG 404707.
- ⚠ OBSOLETE
 ⚠ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

APC ENGINEERING

JUL 13 1990

ISSUED BY *Allen*

CUSTOMER DRAWING UNPUBLISHED

	3-603225-9	NATURAL 500 TY2HL	
	3-603225-0 ⚠	BLACK 500 TY2HLB	
	4-603225-9 ⚠	NATURAL 50 TY2HD	
	4-603225-0	BLACK 50 TY2HDB	

LOC 0	DWG SIZE	PART No.	DESCRIPTION	ITEM NO
DIST 1	REVISION OF EACH ASSY NO. (WHEN BLANK, USE DWG REVISION)			
QTY. REQ'D. PER ASSY.		PARTS LIST		
		MATERIAL NYLON 6/6	HEAT TREAT	FINISH
		DIMENSIONS ARE IN INCHES	DRAWN BY: AD-TEK/VL	DATE: 6/25/90
		TOLERANCES UNLESS OTHERWISE SPECIFIED: 2 PL DEC ± 3 PL DEC ± .039 4 PL DEC ±	CHECK BY: BJM 6/90	APPROVED BY: J. Hamed 6/90
		ANGLES ± SURF TEXTURE: J	AMP AMP INCORPORATED Harrisburg, Pa.	
		REMOVE BURRS, BREAK SHARP EDGES, .015 R. MAX.	NAME: HEAVY DUTY CABLE TIE 8-7/8 INCH	
B1	REVISED PER ECO-09-026444	AEG 28NOV 89	SCALE: A	DRAWING No.: 603225
✓ B	ECN 062890	3/90 6/90	SHEET: 1 OF 1	REV.: B1
P	LTR	REVISION RECORD	APC	DATE

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP INCORPORATED, HARRISBURG, PA.