
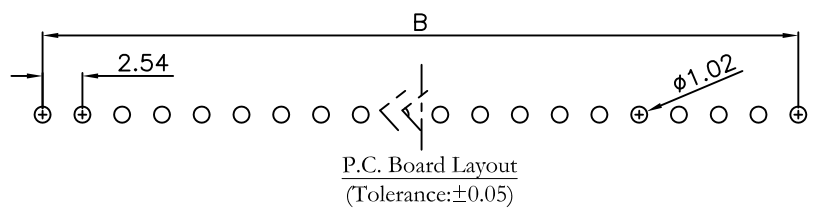
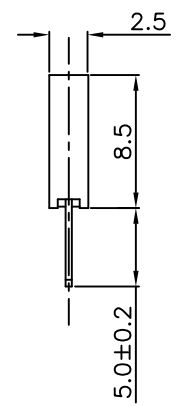
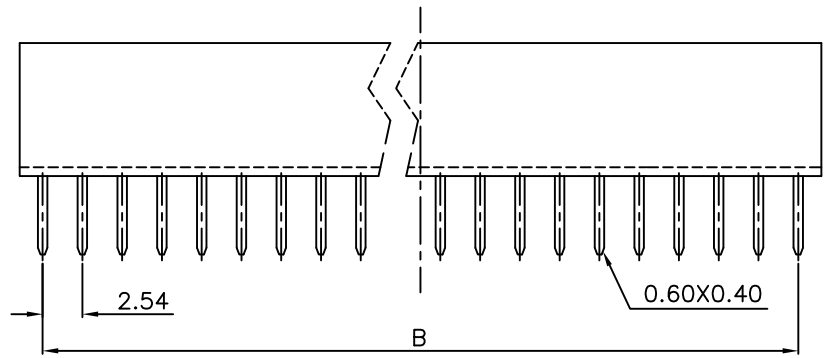



REV.	SPECIFICATION	ECN NO.	APPD.
R4		ECN210130	

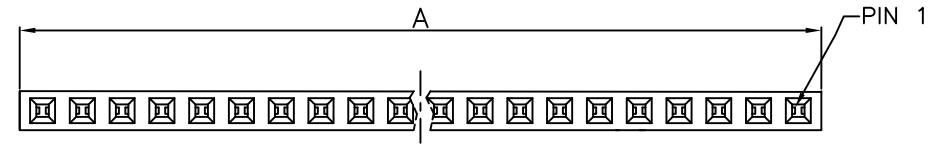

2044- 1 X xx G xx S -5 A

- Series
- Single Row
- No. of Pin Per Row
- G: Gold Plated
- T: Tin Plated
- A: Tray Package
- Standrad Length: 5
- S: Straight
- 00: G/F
- 10: 10u"
- 15: 15u"
- 30: 30u"

Material and Plating :
Housing: PBT,UL94V-0,Black.
Contacts: Brass
Gold Plated or 80u" Min Tin Plated on Contact Area and Gold Flash or 80u" Min Tin Plated on solder Tail over 50u" Min Nickel

Electrical Characteristics:
Current Rating:2 AMP.
Dielectric Withstanding Voltage:AC 1000V for 1 minute.
Insulator Resistance:1000MΩ min. at DC 500V.
Contact Resistance:20mΩ max. at DC 100mA.
Operating Temperature:-55°C~+105°C .

***RoHS Compliant**
Insertion Depth: 2.55mm to 6.20mm.

Position Dimension	2 Thru 40
A	2.54 X No. of Position +0.4
B	2.54 X No. of Position -2.54

Tolerances	Dwg. No.	2044-D0000-025
x = ±0.5	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	WQ 01/27'21

Title:
2044 Series
P.C.B. Socket 2.54mm(0.100")

OUPIN
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.
P/N: 2044-1XxxGxxS-5A

SHEET	1/1	Ver. No.	R4
-------	-----	----------	----