

Housing - HC-B 10-TFQ-H-O1STM25G - 1460080

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



HEAVYCON sleeve housing B10, for double locking latch, height 72 mm, with thread 1x M25, straight conductor exit



Key commercial data

| | |
|----------------------|----------|
| Packing unit | 1 1 |
| Custom tariff number | 85389099 |
| Country of origin | Germany |

Technical data

Dimensions

| | |
|--------|-------|
| Height | 72 mm |
| Width | 43 mm |
| Length | 73 mm |

Ambient conditions

| | |
|---------------------------------|-------------------|
| Schutzart Gehäuse (IP) | IP65 |
| Ambient temperature (operation) | -40 °C ... 125 °C |

General

| | |
|------------------------------|--|
| Note | For contact inserts HC-B10, BB18, DD42, M, K8/24 |
| Design | B10 |
| Housing type | Sleeve housings |
| Locking type | For double locking latch |
| No. of cable exits | 1 |
| Cable exit | Straight |
| Screw connection | None |
| Type of the screw connection | 1x M25 |
| Housing material | Aluminum die-cast |

Housing - HC-B 10-TFQ-H-O1STM25G - 1460080

Technical data

General

| | |
|--------------------------|---------------------|
| Housing surface material | Powder-coated, gray |
|--------------------------|---------------------|

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27140816 |
| eCl@ss 4.1 | 27140816 |
| eCl@ss 5.0 | 27143424 |
| eCl@ss 5.1 | 27143424 |
| eCl@ss 6.0 | 27143424 |
| eCl@ss 7.0 | 27440209 |
| eCl@ss 8.0 | 27440209 |

ETIM


| | |
|----------|----------|
| ETIM 3.0 | EC000437 |
| ETIM 4.0 | EC000437 |
| ETIM 5.0 | EC000437 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 31261502 |
| UNSPSC 7.0901 | 31261502 |
| UNSPSC 11 | 31261502 |
| UNSPSC 12.01 | 31261502 |
| UNSPSC 13.2 | 31261502 |

Drawings

Dimensioned drawing

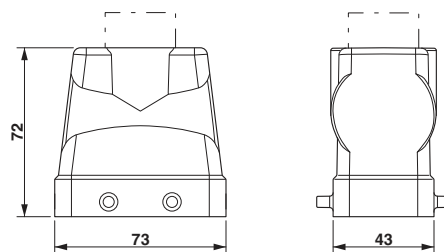

Dimensional drawing

