
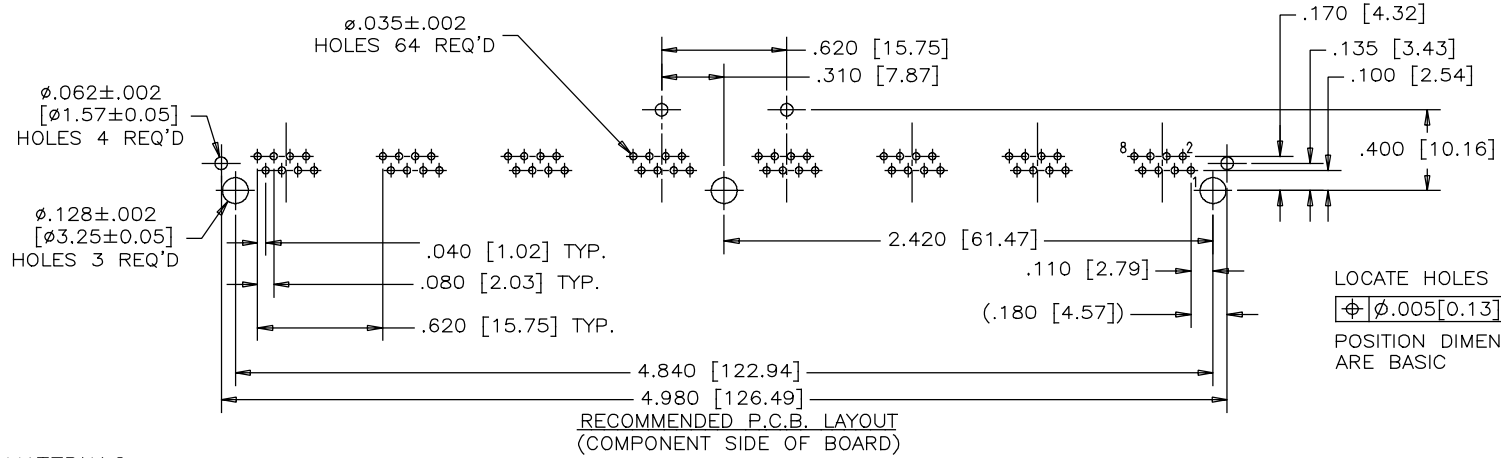
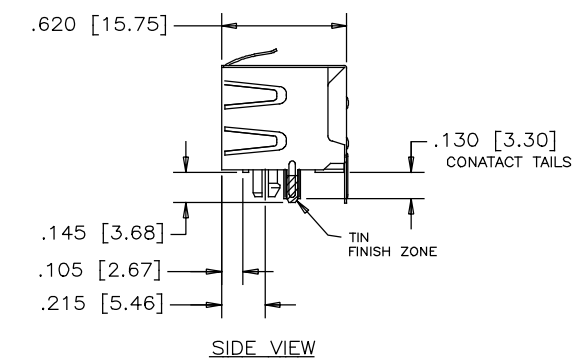


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	MAR15/18	L.CHAN

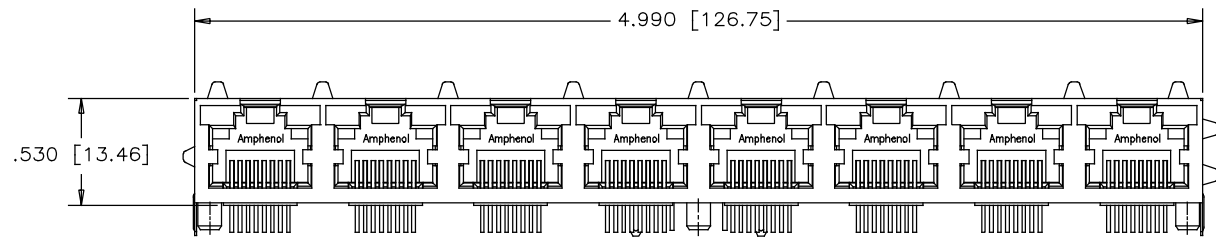

LOCATE HOLES
 $\phi .005 [0.13]$
 POSITION DIMENSIONS ARE BASIC

MATERIALS:
 PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0, COLOR BLACK


CONTACTS: PHOSPHOR BRONZE
 PLATING: GOLD PLATING ON MATING SURFACE.
 [SEE PART NUMBER FOR THICKNESS]
 50 μ " [1.27 MICRONS]
 MIN. NICKEL UNDERPLATE
 100 μ " [2.54 MICRONS]
 MIN. MATTE TIN ON CONTACT TAILS.

SHIELD: COPPER ALLOY WITH TIN FINISH ON SOLDER TAIL

PART NUMBER: RJHSE-X380-A8

GOLD PLATING

- E=RJ45 FLAT CONTACT 6u"
- G=RJ45 FLAT CONTACT 15u"
- J=RJ45 FLAT CONTACT 30u"
- 5=RJ45 FLAT CONTACT 50u"

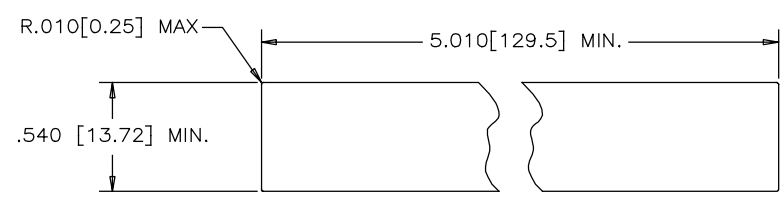

RECOMMENDED PANEL CUTOUT

UNLESS SPECIFIED OTHERWISE		DRAWN W.QIU	DATE MAR15/18	Amphenol Canada Corp. www.amphenolcanada.com
PRIMARY UNITS INCH	CHECKED L.CHAN	M.E. APP'D	DATE MAR15/18	
SECONDARY MILLIMETER	REFERENCE IN PARENTHESES	Q.A. APP'D	DWG APPR.	TITLE
GENERAL TOLERANCES		ENG. REL. NO.	REF.	EIGHT-PORT HIGH SPEED MODULAR JACK, 8 POSITIONS, 8 CONTACTS, SHIELD WITHOUT LED, 0.13" LONG CONTACT TAILS -RoHS COMPLIANT
1 DECIMAL PLACE ± 0.025	2 DECIMAL PLACES ± 0.020	3 DECIMAL PLACES ± 0.015	ANGULAR DEGREES $\pm 1.0^\circ$	DWG. NO.
THIRD ANGLE PROJECTION				REV A
DO NOT SCALE DRAWING				P-RJHSE-X380-A8
CODE ID NO. 03554		DWG SIZE: C	SCALE: N/A	SHEET 1 OF 1