
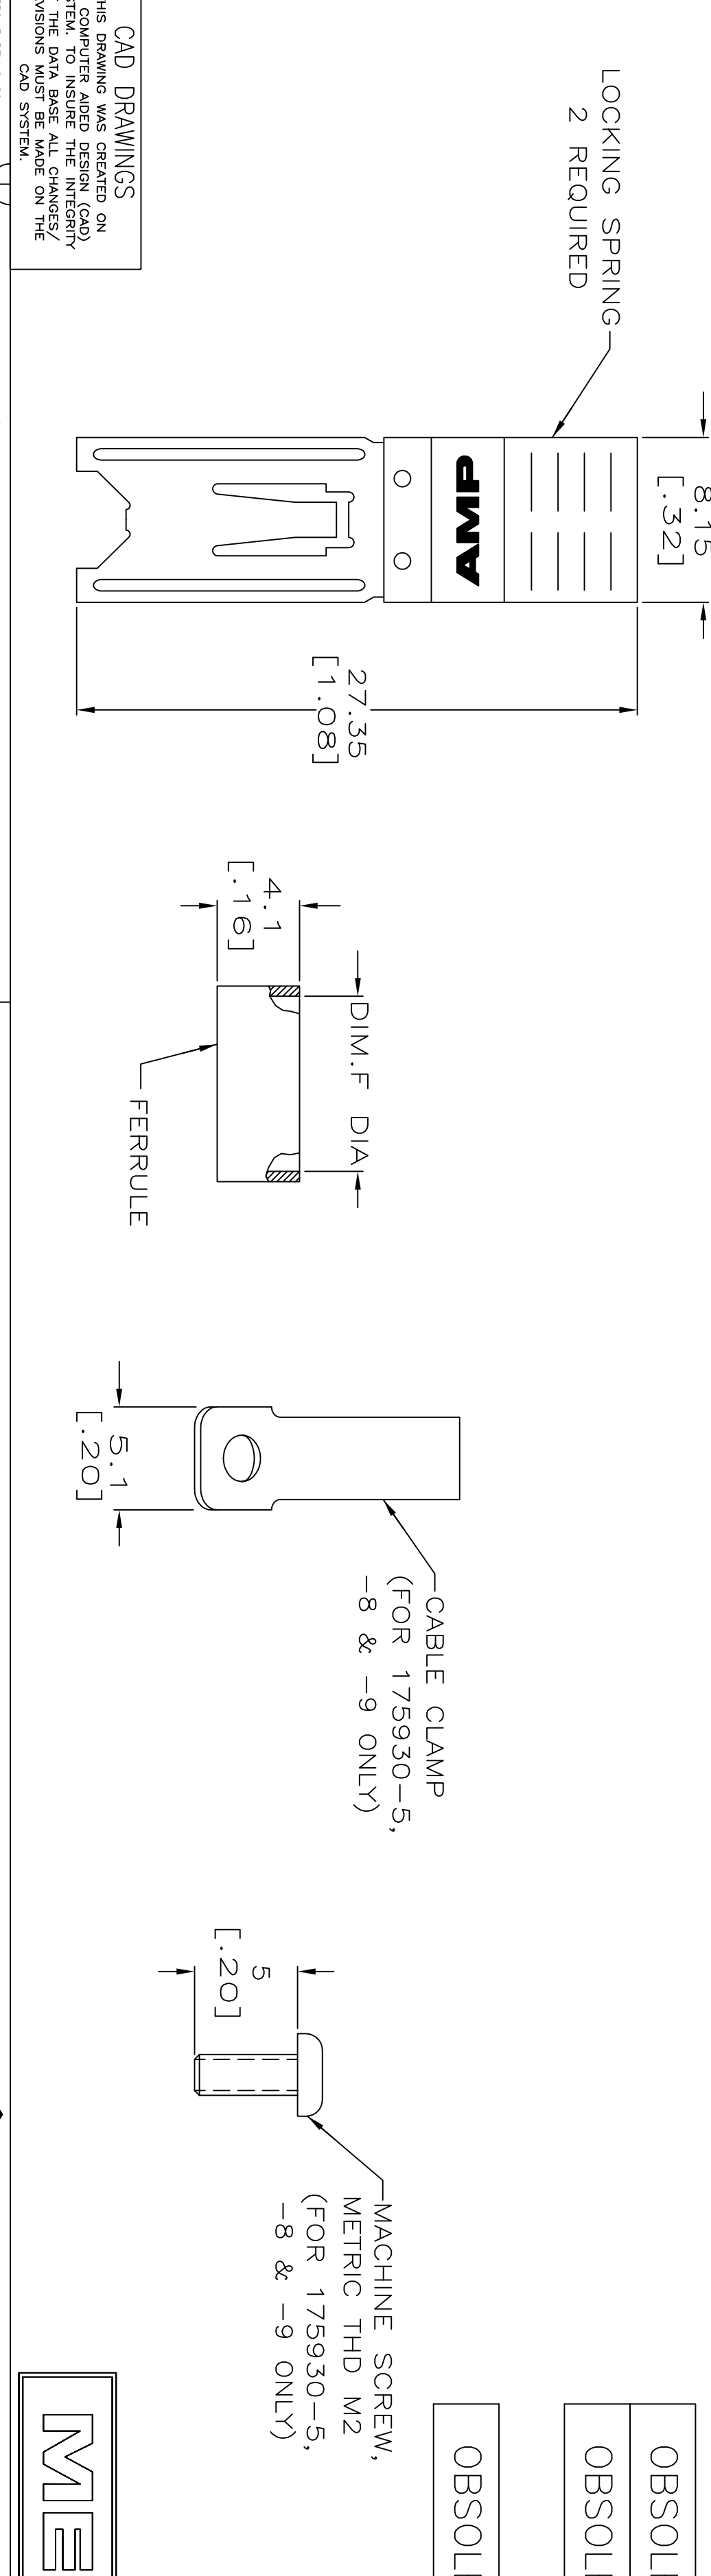


ASSEMBLED VIEW
 (FOR REFERENCE ONLY)

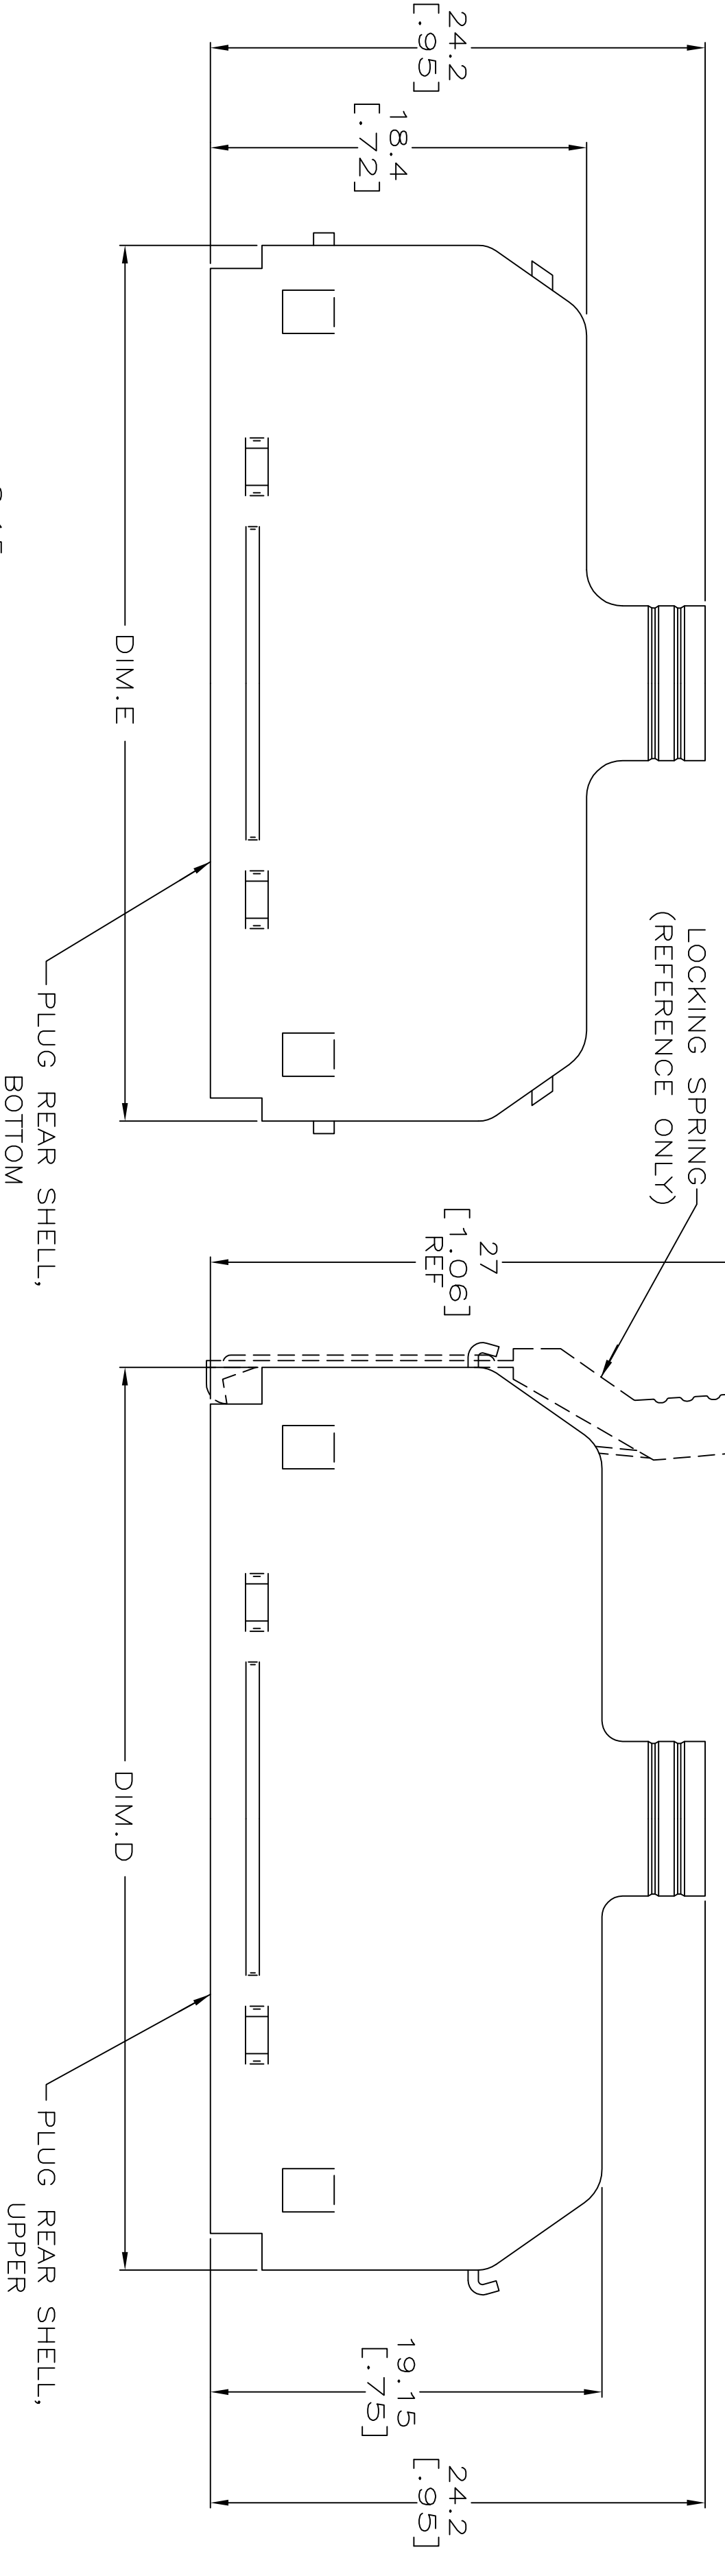


REV	DATE	APPD	DESCRIPTION
1	8-24-89 AH	JM	RELEASED/NPR C89-100
2	04/29/94	JM	OBSOLETE PER EC 0020-0304-94
3	25/08	ST	REVISED FOR-08-018717

MATERIALS:
 BODY COVER AND LOCKING SPRING INSULATOR - THERMOPLASTIC, UL 94V-0, BEIGE, WHITE.
 REAR SHELL UPPER AND BOTTOM - 0.3±0.015 [.0200±.0006] THICK BRASS WITH 0.005 [.0002] MINIMUM NICKEL PLATED OVER 0.0013 [.00005] MINIMUM COPPER UNDERPLATE.
 LOCKING SPRING - 0.3±0.02 [.0120±.0008] THICK STAINLESS STEEL.
 FERRULE - 0.5±0.015 [.0200±.0006] STEEL, TIN PLATED 0.002 [.00098] MIN.
 CABLE CLAMP - 0.5±0.05 [.020±0.002] THICK STEEL, WITH 0.005 [.0002] MINIMUM NICKEL PLATED OVER 0.0013 [.00005] MINIMUM COPPER UNDERPLATE.
 SCREW - STEEL WITH 0.005 [.0002] MINIMUM NICKEL UNDERPLATE.
 ALL DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.

3. KIT SHIPPED NOT ASSEMBLED.

DESCRIPTION	DIM.G	DIM.F	DIM.E	DIM.D	DIM.C	DIM.B	DIM.A	POSITION	PART NO
OBSOLETE	44.2 [1.74]	10.6 [4.2]	74.5 [2.93]	75.8 [2.98]	13.7 [5.39]	71.9 [2.83]	81.8 [3.22]	9.75 - 10.25 [3.8 - .40]	100
OBSOLETE	42.7 [1.68]	9.6 [3.8]	54.1 [2.13]	55.5 [2.18]	12.2 [4.80]	51.6 [2.03]	61.6 [2.42]	8.55 - 9.05 [3.4 - .36]	68
OBSOLETE	44.4 [1.75]	8.6 [3.4]	42.8 [1.69]	44.1 [1.74]	11.2 [4.41]	40.2 [1.58]	50 [1.99]	7.85 - 8.35 [3.1 - .33]	50
OBSOLETE	42.7 [1.68]	8.6 [3.4]	33.8 [1.33]	35.1 [1.38]	11.2 [4.41]	31.3 [1.23]	41.23 [1.62]	6.95 - 7.45 [2.7 - .29]	36

DO NOT SCALE PRINT.
 UNLESS SPECIFIED DIMENSIONS IN MM [INCHES]
 TOLERANCES: ± .15 [± .006] ANGLES ± .5°
 DR 8-4-89 A.HOLT
 CHK 8-25-89 N.JONES
 APPD 8-25-89 T.PIZZULO
 PRODUCT SPEC E.MARSH
 108-5288
 APPLICATION SPEC 114-5136
 WEIGHT -



AMP INCORPORATED
 Harrisburg, Pa. 17105

CASE KIT, SHIELDED, 75°, CHAMP .050, SERIES II ©

SIZE: D 00779
 SCALE: 4:1

CAGE CODE: 175930
 DRAWING NO: 175930
 SHEET: 1 OF 1

CAD DRAWINGS
 THIS DRAWING WAS CREATED ON A COMPUTER AIDED DESIGN (CAD) SYSTEM. THE DIMENSIONS AND TOLERANCES OF THE DATA BASE ALL CHANGES/REVISIONS MUST BE MADE ON THE ORIGINAL DATA BASE.