



Electrical specifications

Center Frequency: 250 MHz
Passband (Pb): 55 MHz
Ins. Loss in Pb: 1.5dB
Insertions loss in Pb: 1.5dB
Rejection 1: >=40dB@216MHz
Rejection 2: >= 40dB@290MHZ
Power: 50W


Mechanical

Mounting Method: Threaded Mounting
Connector Type: SMA (F)
Dimensions: 4.50" x 1.50" x 0.63"

Environmental

Operating Temperature: -40°C to +75°C
Storage Temperature: -55°C to +100°C

Outline Drawing:

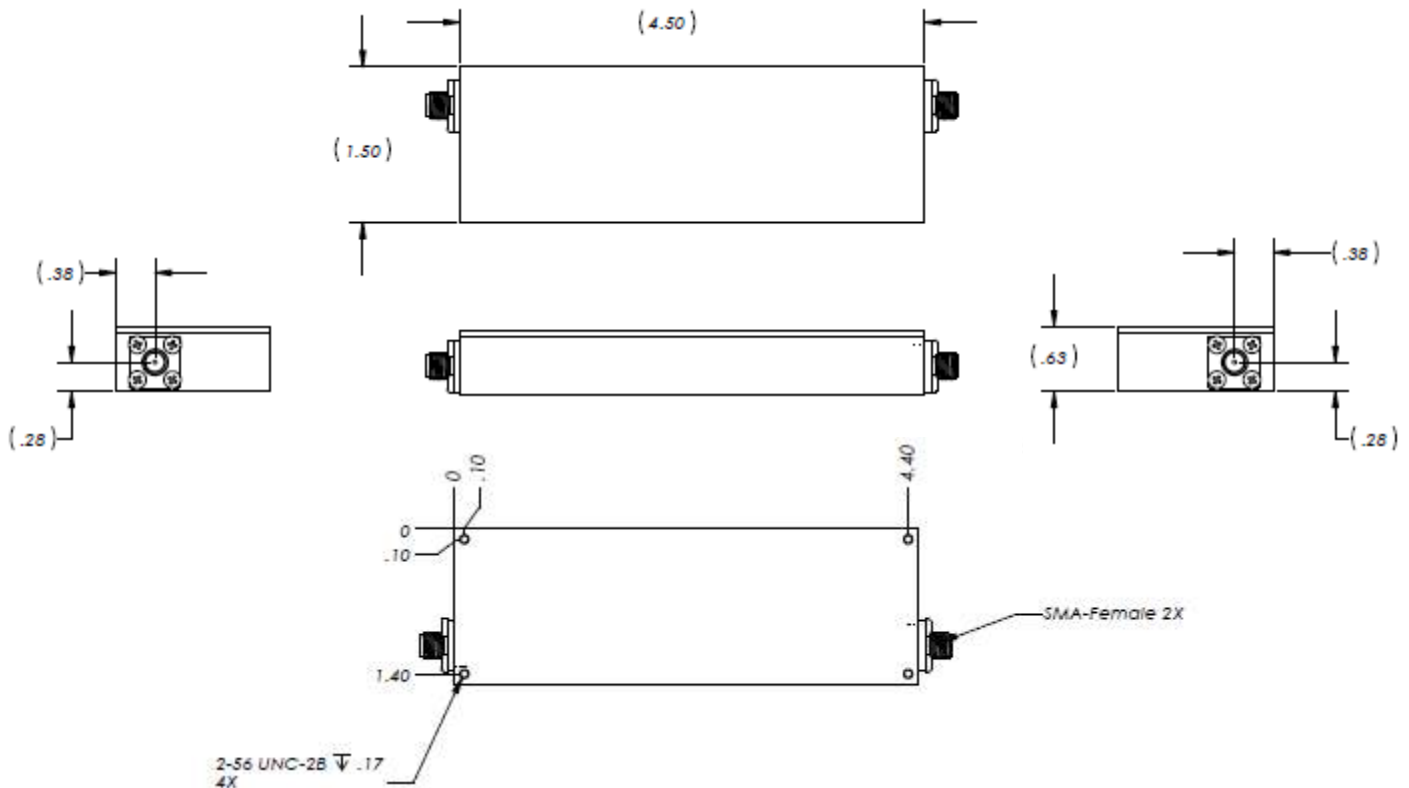



Response Plot:

