


Sockets for RPY Relays


ZPY14A

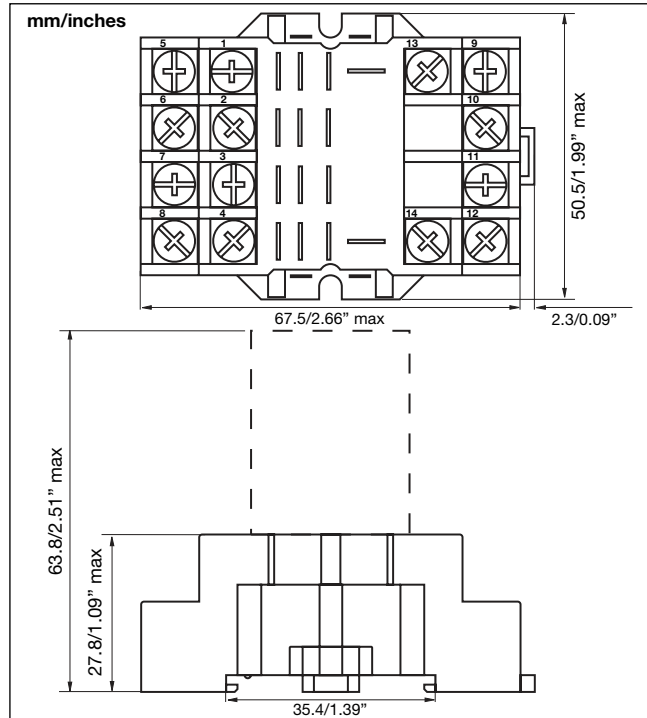


General data

Rated Voltage	400VAC
Rated Current	10A
Insulation Voltage	>4kV
Socket material	PA66 + GF (V0)
Socket colour	RAL 7035 / Pantone 1C
Contact material	Nickel Plated - Cu Zn 33
Terminal type	Screw cage
Screw type	M3 with combi head (slotted, Philips Gr.1, Pozi)
Max. screw torque	1.0N/m
Max wire section	0.5-2.5mm ² (20AWG 14AWG)
Operating temperature	-25° to +85°C (-13° to +185°F)
UL rating	10A 300VAC
UL temperature	0° to +60°C (+32° to +140°F)

Drilling pattern

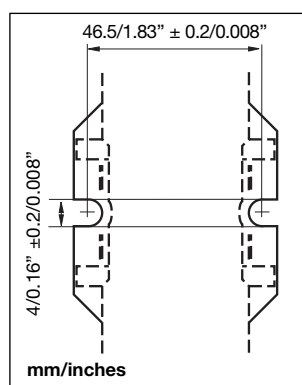

Wiring diagram

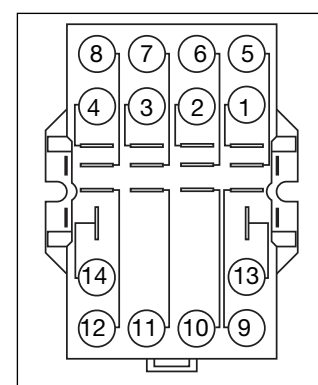

Approvals




Box content: 10 sockets
 Box size: (W 100 x D 71 x H 140) mm Weight: 840g
 (W 3.94 x D 2.80 x H 5.51) inches Weight: 29.63oz

Optional Accessories (to be ordered separately if required)

Hold-down spring steel SZPY 35M

Optional Springs for ZPY series

SZPY 35M

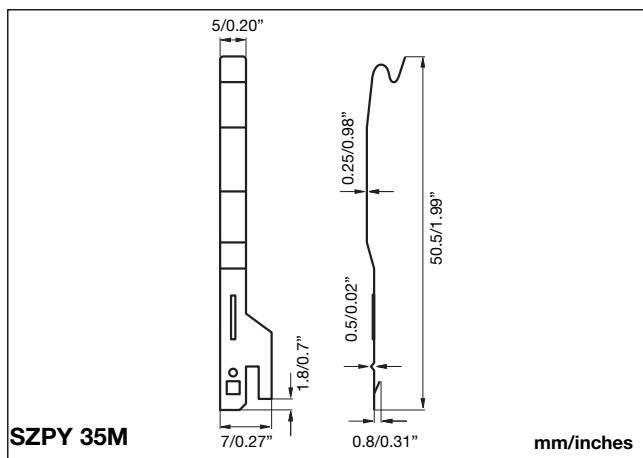

General data

Spring material

Stainless steel

Packaging

Box content: 1 plastic bag, 10pcs.

Weight: ~10g (0.36oz)

Note:

For each realy/socket are required at least 2 springs.

Up to 4 springs can be mounted.

RoHS
COMPLIANT