




DESCRIPTION: LOW PROFILE FLAT RIBBON CONNECTOR

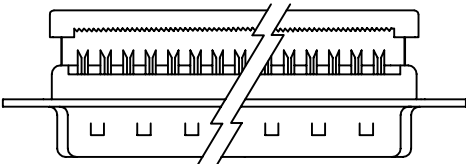

	A	B	C NO S/R	C WITH S/R
9	1.213 30.81	.984 25.00	.610 15.49	.730 18.54
15	1.541 39.14	1.312 33.33	.610 15.49	.730 18.54
25	2.088 53.04	1.852 47.04	.610 15.49	.730 18.54
37	2.729 69.32	2.500 63.50	.610 15.49	.730 18.54

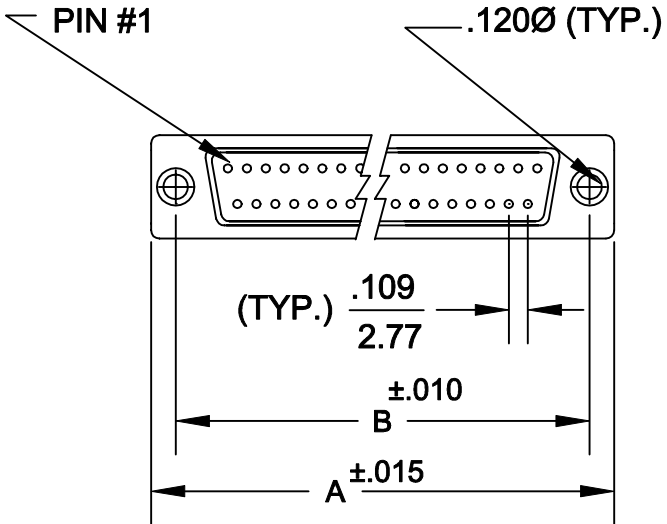

TERMINATED



184-XXX-X92-XX1

SERIES _____

POSITIONS _____

009
015
025
037
050

GENDER _____

1 = MALE
2 = FEMALE

TERMINATION _____

9 = IDC

SHELL PLATING _____

2 = TIN/ZINC

HARDWARE OPTIONS _____

00 = NO HARDWARE
01 = .065 4-40 CLINCH NUT BOARD SIDE
02 = .250 4-40 CLINCH NUT BOARD SIDE
03 = .250 4-40 CLINCH NUT MATING SIDE

PLATING OPTIONS _____

1 = GOLD FLASH

SPECIFICATIONS:

MATERIALS:

SHELL: STEEL, TIN OR ZINC PLATED
 INSULATOR: UL 94V-0 RATED PBT
 +30% FIBER-GLASS OR NYLON-66

ELECTRICALS:


CURRENT RATING: 1 AMP
 CONTACT RESISTANCE: 15 mOHMS MAX
 INSULATOR RESISTANCE: 1000 MOHMS MIN
 VOLTAGE: 500V AC FOR 1 MINUTE
 TEMPERATURE: -50°C TO +100°C

ACCEPTS: 28 AWG SOLID OR STRANDED .050" CENTER FLAT RIBBON CABLE


	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: WAYNE ROBBINS	DATE: 9-28-98
			CHECKED:	DATE:
NorComp		SCALE: 1:1	SHEET 1 OF 1	REV 4
		DWG NO. 184-XXX-192-XX1		

DESCRIPTION: CLINCH NUT HARDWARE


ALL CLINCH-NUTS ARE 4-40 INTERNAL THREADS




03X..... .250" (MATING SIDE) - CN8



02X250" (BOARD SIDE) - CN2




01X065" (BOARD SIDE) - CN1

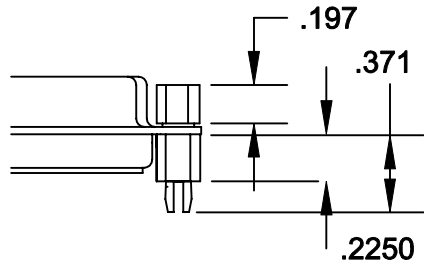

91X225" (BOARD SIDE) - .197 MATING SIDE - CN10/SFS0440

NOTE: 4-40 FEMALE SCREW LOCK IS REMOVABLE

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: WAYNE ROBBINS	DATE: 8-23-98
	NorComp		CHECKED: PAM JENKINS	DATE: 8-24-98
SCALE:			SHEET 1 OF 1	REV 3
DWG NO.			CLINCH-NUT OPTIONS	