

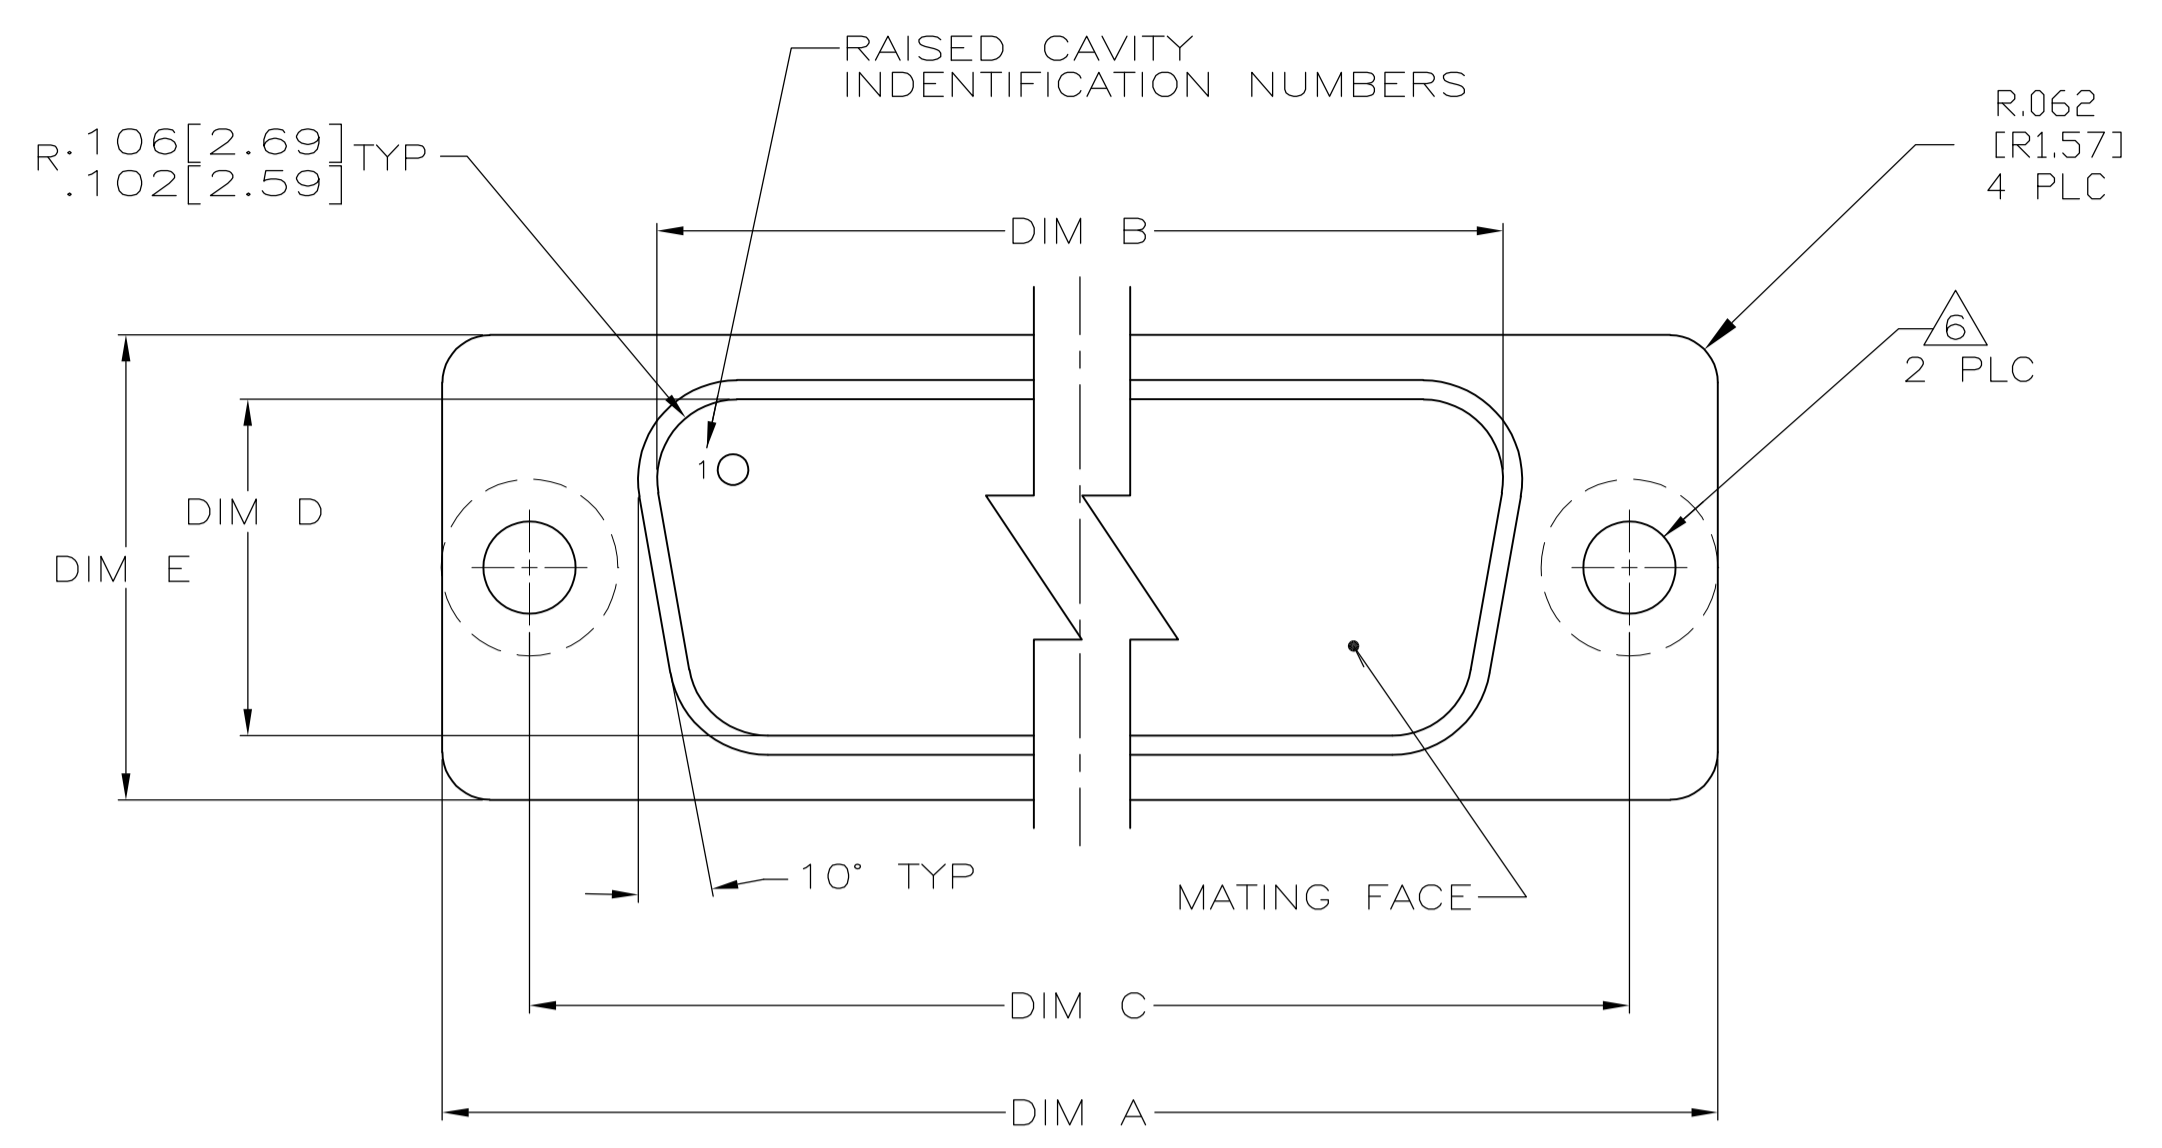
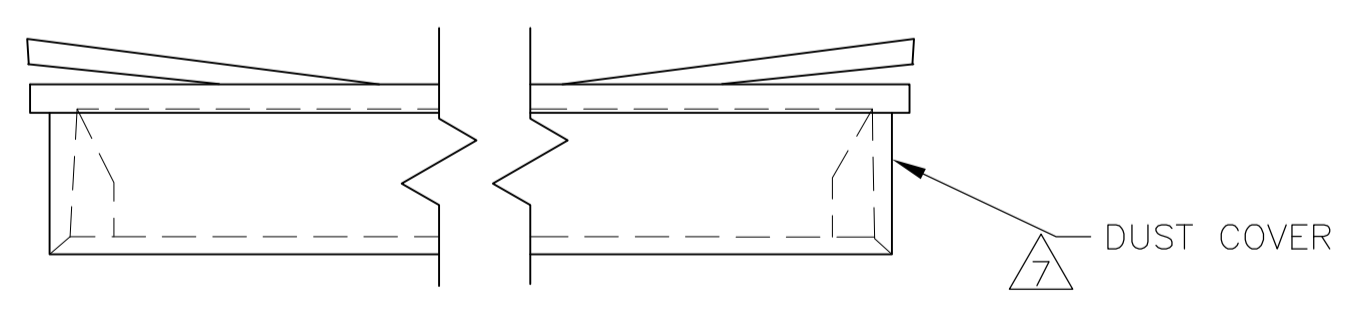


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DN	APVD		
D		REV PER ECO 09-014927	6-24-09	CT	DM		

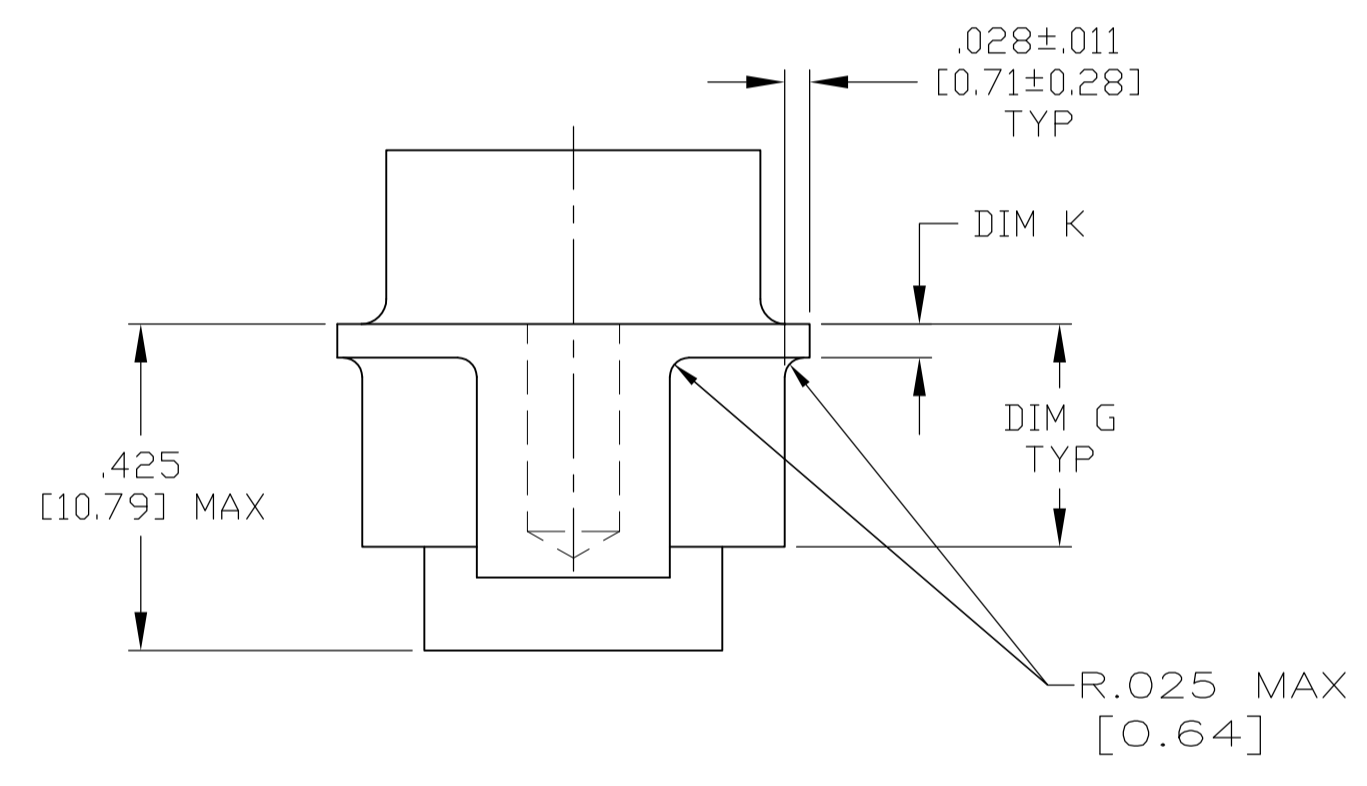

- CONNECTOR (S) WILL BE TESTED IN ACCORDANCE WITH GROUP A INSPECTION OF NASA SPEC S-311-P-4, RESIDUAL MAGNETISM IS NOT REQUIRED.
 - THIS CONNECTOR ASSEMBLY MATES WITH ANY MIL-PRF-24308 RECEPTACLE CONNECTOR WITH SAME INSERT ARRANGEMENT.
 - MARKED WITH .047 [1.19]-.062 [1.57] HIGH CHARACTERS. FAR SIDE REFERS TO THE WIDE SIDE OF THE KEYSTONE. NEAR SIDE REFERS TO THE NARROW SIDE OF THE KEYSTONE. IF THE SHELL IS TOO SMALL FOR ALL THE INFORMATION THEN MARKING MAY BE SPLIT BETWEEN FRONT AND REAR, FAR SIDE.
 - RETENTION SPRING MATERIAL: BERYLLIUM COPPER PER ASTM B 194.
 - THIS DRAWING SHALL BE INTERPRETED IN ACCORDANCE WITH APPLICABLE STANDARDS LISTED IN MIL-STD-100.
- △ .112-40UNC-2B HELICOIL INSERT PER NAS1130-04-15. NO PLATING IS REQUIRED PRIOR TO OR POST INSTALLATION OF THE HELICOIL INSERT.
- △ A DUST COVER IS ASSEMBLED ON EACH CONNECTOR.

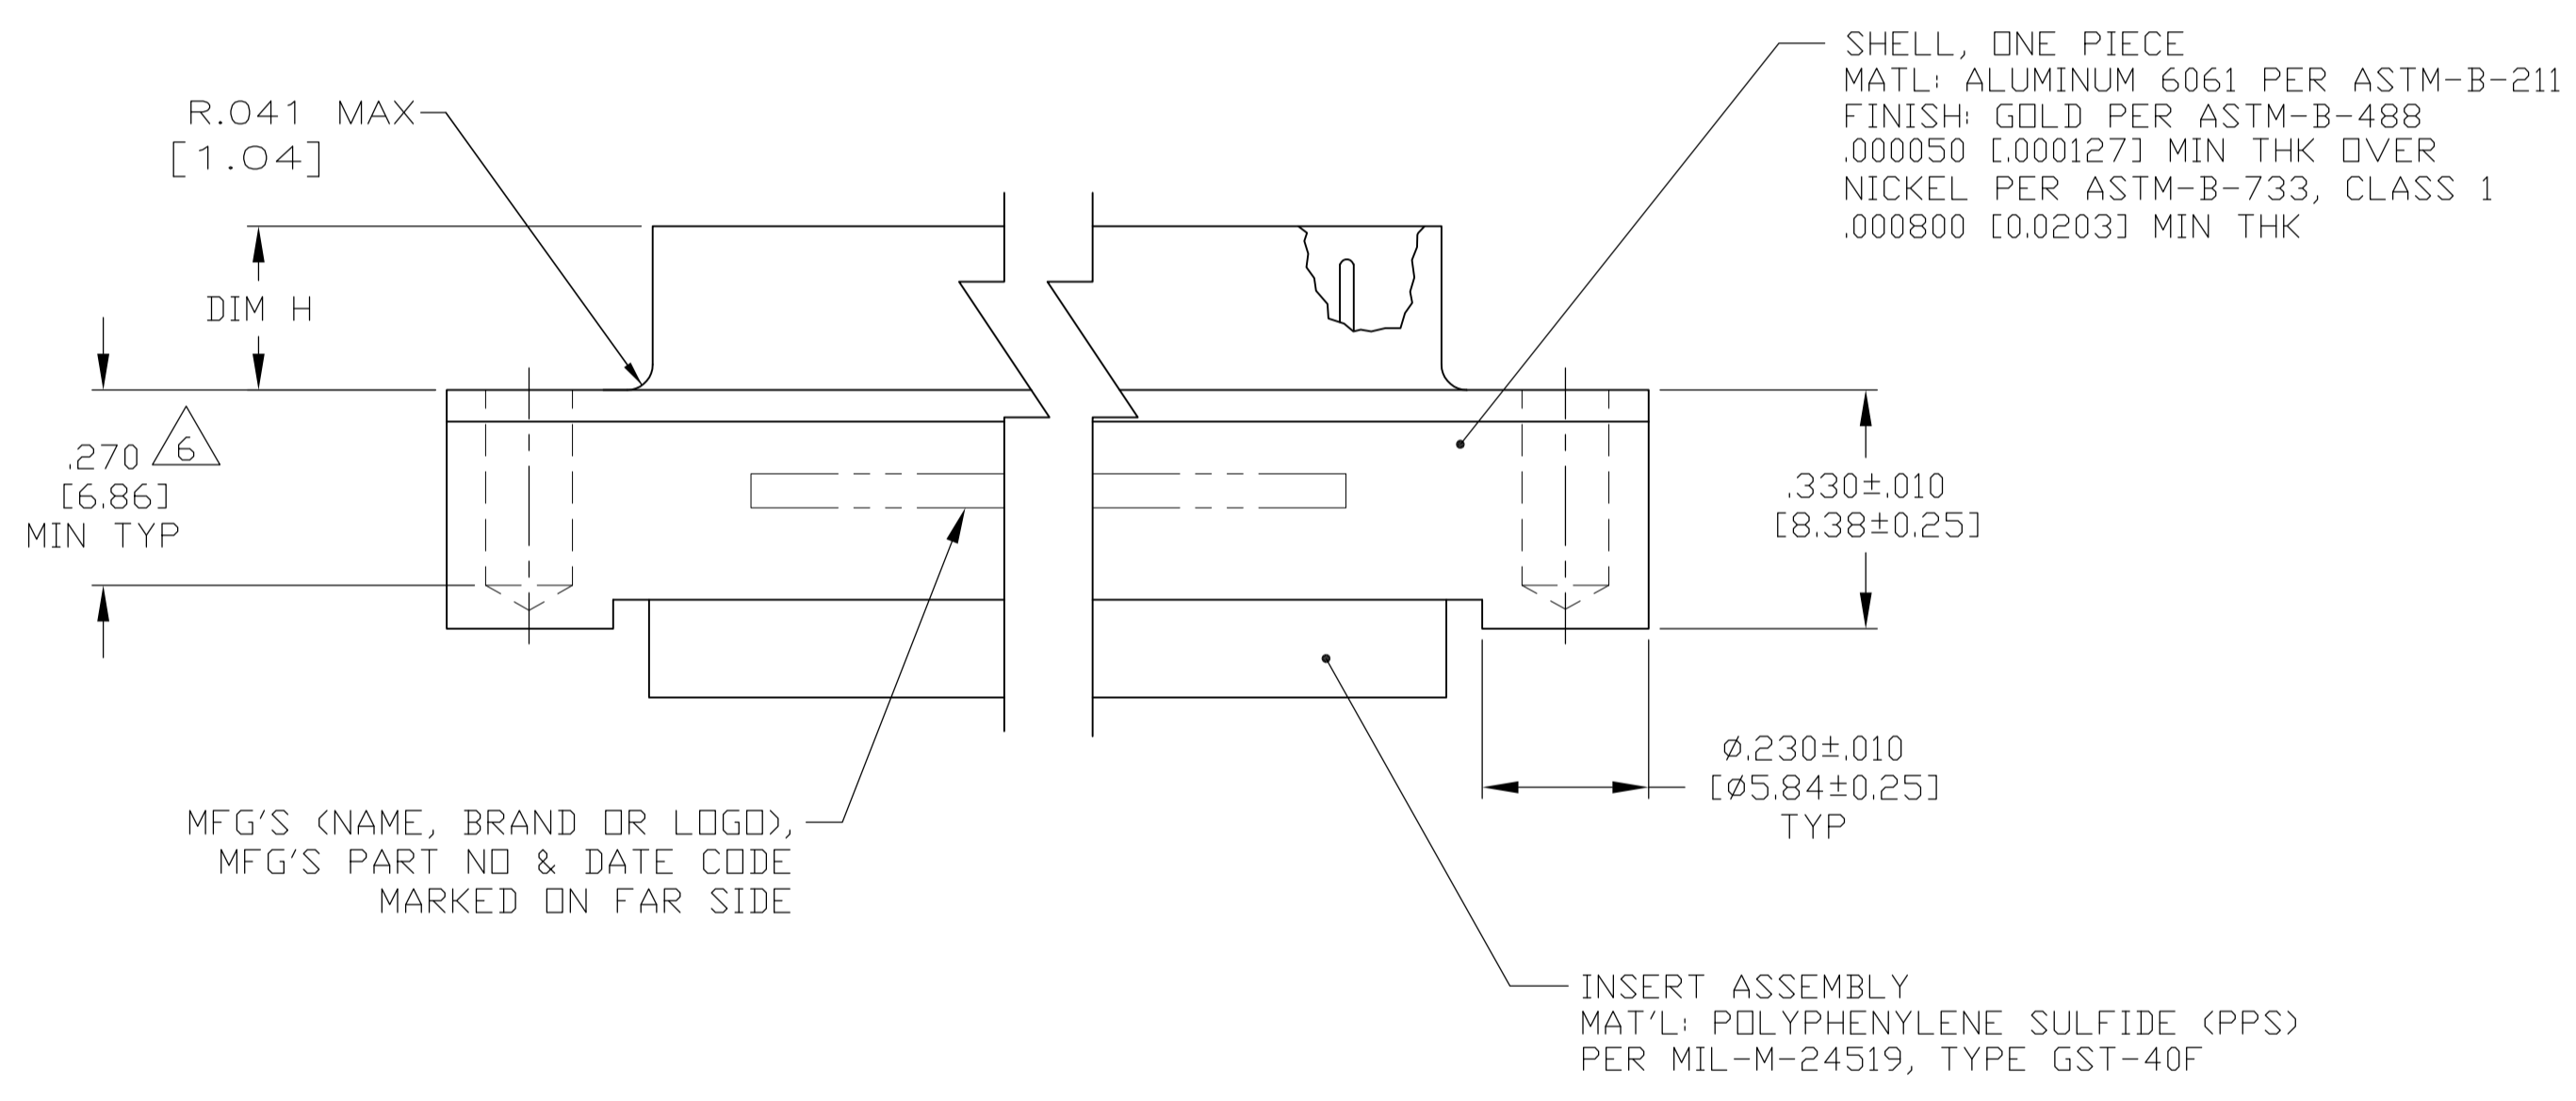

.044	.236 [5.99]	.299	.610 [15.49]	.446 [11.33]	2.411 [61.24]	2.084 [52.93]	2.640 [67.06]	MS18277-2	78	5	1883055-5
[1.12]	[5.69]	[7.59]	[15.24]	[11.07]	[60.99]	[52.68]	[66.80]				
.044	.236 [5.99]	.299	.499 [12.67]	.334 [8.48]	2.505 [63.63]	2.187 [55.55]	2.734 [69.44]	MS18276-2	62	4	1883055-4
[1.12]	[5.69]	[7.59]	[12.42]	[8.23]	[63.37]	[55.30]	[69.20]				
.044	.236 [5.99]	.299	.499 [12.67]	.334 [8.48]	1.857 [47.17]	1.539 [39.09]	2.093 [53.16]	MS18275-2	44	3	1883055-3
[1.12]	[5.69]	[7.59]	[12.42]	[8.23]	[46.91]	[38.84]	[52.91]				
.035	.241 [6.12]	.294	.499 [12.67]	.334 [8.48]	1.317 [33.45]	.999 [25.37]	1.546 [39.27]	MS18274-2	26	2	1883055-2
[0.89]	[5.82]	[7.47]	[12.42]	[8.23]	[33.20]	[25.12]	[39.01]				
.035	.241 [6.12]	.294	.499 [12.67]	.334 [8.48]	.989 [25.12]	.671 [17.04]	1.218 [30.94]	MS18273-2	15	1	1883055-1
[0.89]	[5.82]	[7.47]	[12.42]	[8.23]	[24.87]	[16.79]	[30.68]				
K	H	G±.010 [±0.25]	E	D	C	B	A	INSERT ARRANGEMENT	NO OF POS	SHELL SIZE	MFG'S PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± .005
1 PLC	± .005
2 PLC	± .005
3 PLC	± .005(0.13)
4 PLC	± .005
ANGLES	± .005

MATERIAL: SEE CALLOUT

FINISH: SEE CALLOUT

WEIGHT: —

CUSTOMER DRAWING

DIN: C.C. THOMAS 10-24-05

CHK: D. MILLER 10-25-05

APP'D: D. MILLER 10-24-05

NAME: AMPLIMITE PLUG ASSEMBLY SERIES 90, CRIMP, ONE PIECE SHELL SIZE 1 THRU 5

SIZE: A1

SCALE: 4:1

SHEET: 1 OF 1

REV: D