

|           |                                  |          |   |
|-----------|----------------------------------|----------|---|
| PART NAME | NON-METALLIC ENCLOSURE (STYLE B) | PART No. | NBB-10245 & NBB-10265 & NBB-15245 & NBB-22245 |
|-----------|----------------------------------|----------|---|

**MATERIAL:**  
UL LISTED INDOOR VERSION  
 SOLID BODY & COVER \_\_\_\_\_ ABS/PC BLENDED PLASTIC  
 UL94-5VB FLAMMABILITY RATING  
 CLEAR COVER \_\_\_\_\_ POLYCARBONATE PLASTIC  
 UL94V-0 FLAMMABILITY RATING  
 UV STABILIZED  
UL LISTED OUTDOOR VERSION  
 SOLID BODY & COVER \_\_\_\_\_ PBT/PC BLENDED PLASTIC  
 UL94-5VA FLAMMABILITY RATING  
 UV STABILIZED  
ABS VERSION  
 SOLID BODY & COVER \_\_\_\_\_ ABS  
 UL94-HB FLAMMABILITY RATING

**FINISH:**  
 BODY \_\_\_\_\_ LIGHT GRAY  
 COVER \_\_\_\_\_ LIGHT GRAY OR CLEAR  
 LATCHES & HINGES \_\_\_\_\_ NON-METALLIC  
 WALL MOUNTING BRACKETS \_\_\_\_\_ STAINLESS STEEL


**INDUSTRY STANDARDS:**  
UL LISTED INDOOR VERSION  
 UL508 TYPE 1, 2, 3, 3R, 4, 4X INDOOR, 12 & 13  
 NEMA TYPE 1, 2, 3, 3R, 4, 4X, 12 & 13  
 IEC529-IP65  
UL LISTED OUTDOOR VERSION  
 UL508 TYPE 1, 2, 3, 3R, 4, 4X, 12 & 13  
 NEMA TYPE 1, 2, 3, 3R, 4, 4X, 12 & 13  
 IEC529-IP65  
ABS VERSION  
 NEMA TYPE 1, 2, 3, 3R, 4, 4X, 12 & 13  
 IEC529-IP65

**ALL VERSIONS**  
 GASKET \_\_\_\_\_ MODIFIED POLYURETHANE

**NOTE:** UNIT COMES COMPLETE WITH  
 (4) WALL MOUNTING BRKTS.  
 & (4) M5 x 10mm LG. TRUSS  
 HD. MACHINE SCREWS (NOT  
 SHOWN)

COVER INCLUDES GRAY POLY-  
 URETHANE GASKET.

INTERNAL HINGED PANEL MOUNTING  
 BRACKETS, AIR & MOISTURE VENTS,  
 STAINLESS STEEL LOCKING HASP  
 AND GALVANIZED STEEL INTERNAL  
 PANEL ARE NOT INCLUDED, BUT  
 CAN BE PURCHASED SEPARATELY.

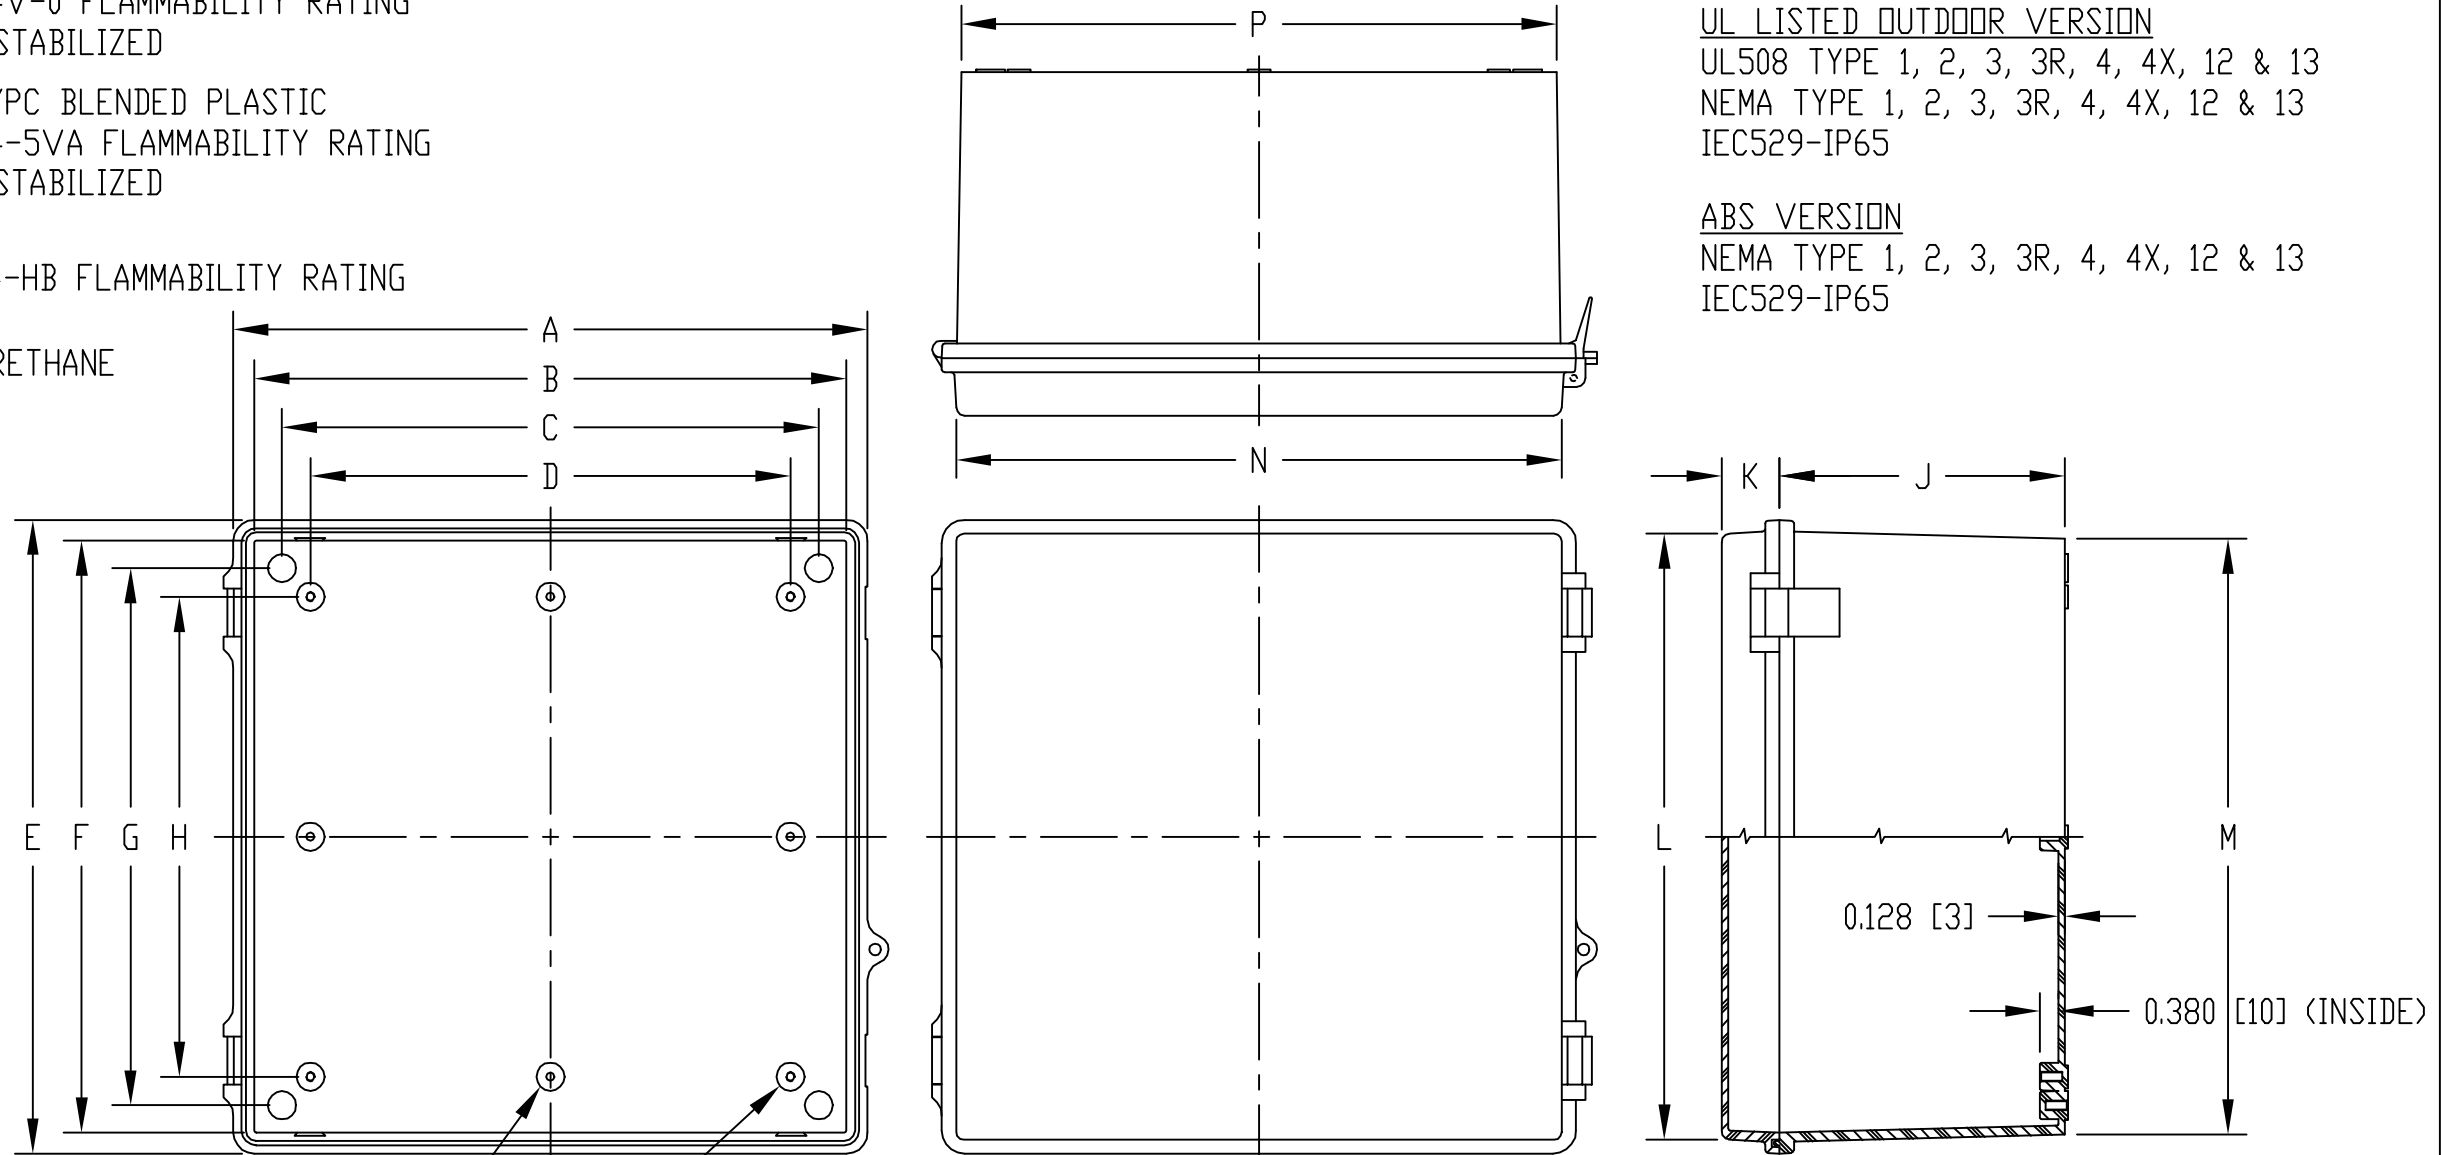

0.575 [15] DIA. BOSS WITH 0.166 [4] DIA.  
 HOLE x 0.395 [10] DEEP (4) PLACES  
 BOSSES ACCEPT M5 METRIC OR #10 STD. SHEET  
 METAL SCREWS x 0.375 [9] LG. (NOT SUPPLIED)

0.575 [15] DIA. BOSS WITH  
 M5 x 0.8mm THREADED BRASS  
 INSERT - (4) PLACES INSIDE  
 (4) PLACES OUTSIDE

DIMENSIONS = INCHES  
 [MILLIMETERS]

**NOTE:** ALL DIMENSIONS HAVE ±0.039 [±1] TOLERANCE  
 UNLESS OTHERWISE SPECIFIED

| VIEW LESS COVER          |                           |             |             | DIMENSIONS |        |        |       |        |        |        |       |       |       |        |        |        |        |
|--------------------------|---------------------------|-------------|-------------|------------|--------|--------|-------|--------|--------|--------|-------|-------|-------|--------|--------|--------|--------|
| UL LISTED INDOOR VERSION | UL LISTED OUTDOOR VERSION | ABS VERSION |             | A          | B      | C      | D     | E      | F      | G      | H     | J     | K     | L      | M      | N      | P      |
| PART NO.                 | PART NO.                  | PART NO.    |             |            |        |        |       |        |        |        |       |       |       |        |        |        |        |
| SOLID COVER              | CLEAR COVER               | SOLID COVER | SOLID COVER |            |        |        |       |        |        |        |       |       |       |        |        |        |        |
| NBB-10245                | NBB-10265                 | NBB-15245   | NBB-22245   | 13.010     | 12.144 | 11.013 | 9.846 | 13.000 | 12.140 | 11.020 | 9.846 | 5.857 | 1.185 | 12.435 | 12.225 | 12.425 | 12.215 |
|                          |                           |             |             | [330]      | [308]  | [280]  | [250] | [330]  | [308]  | [280]  | [250] | [149] | [30]  | [316]  | [311]  | [316]  | [310]  |