


# FLKM 50/ 4-FLK14/PA-S400

Order No.: 2294429



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2294429>

VARIOFACE front adapter, for Siemens SIMATIC® S7-400, 4 x 8 channels can be connected

Commercial data	
GTIN (EAN)	 4 017918 185398
sales group	I600
Pack	2 pcs.
Customs tariff	85369010
Catalog page information	Page 214 (IF-2009)

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.


Technical data	
<b>General</b>	
Nominal voltage $U_N$	< 50 V AC 60 V DC
Channels which can be connected	32
Connection type, plug connector	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of plug connectors	4
No. of positions, plug connector	14
Number of positions	14
Ambient temperature (operation)	-20 °C ... 50 °C
Mounting position	Any

Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Max. permissible current	1 A (per path)
	8 A (per connection, supply via separate power supply)
Max. permissible total current	2 A (Per Byte, for supply via connector)
Pollution degree	2
Surge voltage category	II
Supported controller	SIEMENS S7-400
Supported I/O card	421-1BL01-0AA0
	422-1BL00-0AA0
	422-7BL00-0AB0

**Diagrams/Drawings**

Circuit diagram

Connection scheme: FLKM 50/4-FLK14/PA-S400

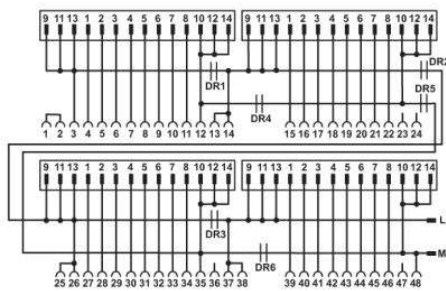

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;