
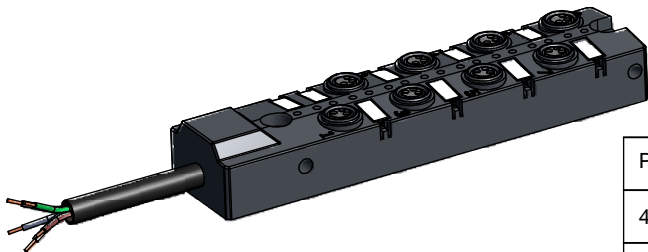


Technical specification:

Rated voltage: IEC 61076-2-104	max. 30 V
Current rating: IEC 61076-2-104	2A signal contact, total ampacity max. 6A
Insulation resistance: IEC 60512	>=100 MΩ
Pollution degree: IEC 60664-1	3/2
Degree of protection: IEC 60529	IP 67, in mated condition
Temperature range: IEC 60664-1	-20°C ... +80°C (unmoved)
Mating cycles: IEC 60512-9a	>=100

Materials:

Contact:	CuZn
Contact plating:	Nickel, gold plated
Contact carrier:	PBT, UL 94
Sealing:	FPM
Housing:	PBT GF, UL 94 similar to RAL 7024
Grouting:	Polyurethane-resin, UL 94

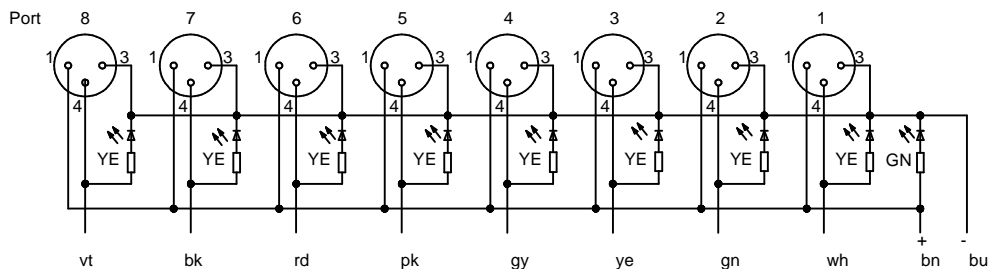

Part no:	Description:	Length L:	Cable:
42-05008	SAL - 8 - 8FK3 - 9L - 5/K3	5m	TPU, UL 21198, black, 2x0,75mm ² + 8x0,34mm ²
42-05009	SAL - 8 - 8FK3 - 9L - 10/K3	10m	

DO NOT ALTER CAD DRAWING BY HAND Directive 2002/95/EC RoHS compliant	Index: a 23.08.11 VF Ä3941 data sheet revised	dim. in mm	
	tolerance of cable: L ≤ 4m: L + 40mm L > 4m: L + 1%	date	name
		drawn 18.06.08	Fromm
	general tolerance: 0 ± 0,50mm 0,0 ± 0,25mm 0,00 ± 0,10mm	appd. 20.06.08	W.Schmidt
CONEC ®			
THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH			

title: Junction box M8x1 8-way with cable, plastic housing	
dwg no: 42K1A081	
part no: see table	