

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00396	Connector, stereo plug, 3.5xL20.5 mm, brass, nickel plated, molding style	2	
2	30-01374	Wire, 2C, BC, 28 AWG, 300V, 80C, 4.3 mm, shielded, PVC, nylon braid	1	
3	24-00346	Overmold, audio plug, Ø7.2xL23.3 mm	2	black, PVC

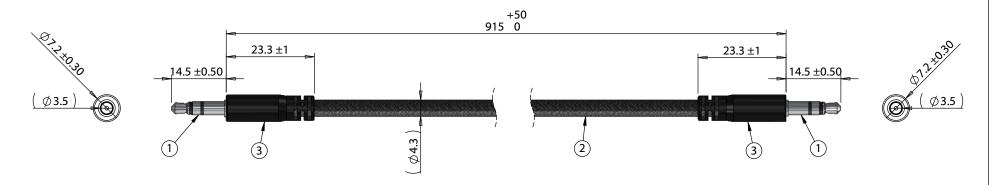



Wiring Diagram										
50-00396	wire color	50-00396								
Α	red	Α								
В	white	В								
С	shield	С								

## Notes: Functionally equivalent components may be substituted

Revision:	Date:	Description:	Prepared:	Notes:					
Α	8/10/2020	Initial release	Digitally signed by JC Date: 2020.08.10 10:55:42 -07'00'	RoHS compliant		TENSILITY			
			Verified:  AW  Digitally signed by AW Date: 2020.08.10 13:28:59 -07'00'	Function test: no open, no short circuit, no intermittent	tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com				
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm	Description: Cable, 915 mm, 3.5 mm 3C 50-00396 audio plug to same, 28 AWG, 30-01374 wire, nylon braided		ze: Part number: 10-03749			
			X.X: ± 0.3 mm X.XX: ± 0.05 mm			1:1		Sheet 1 of 1	
		5	4	3 2				1	