

6

5

4




3

2

1

MATERIAL NUMBER	ENGINEERING NO.	LENGTH ± TOLERANCE
1300500457	ENP3335M010	3' 3" +2.19"/-0" [1M +55.6/-0 mm]
1300500193	ENP3335M050	16' 4" +6.50"/-0" [5M +165.1/-0 mm]

AUX VIEW
SCALE 1:4

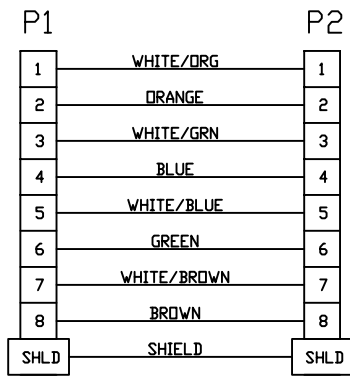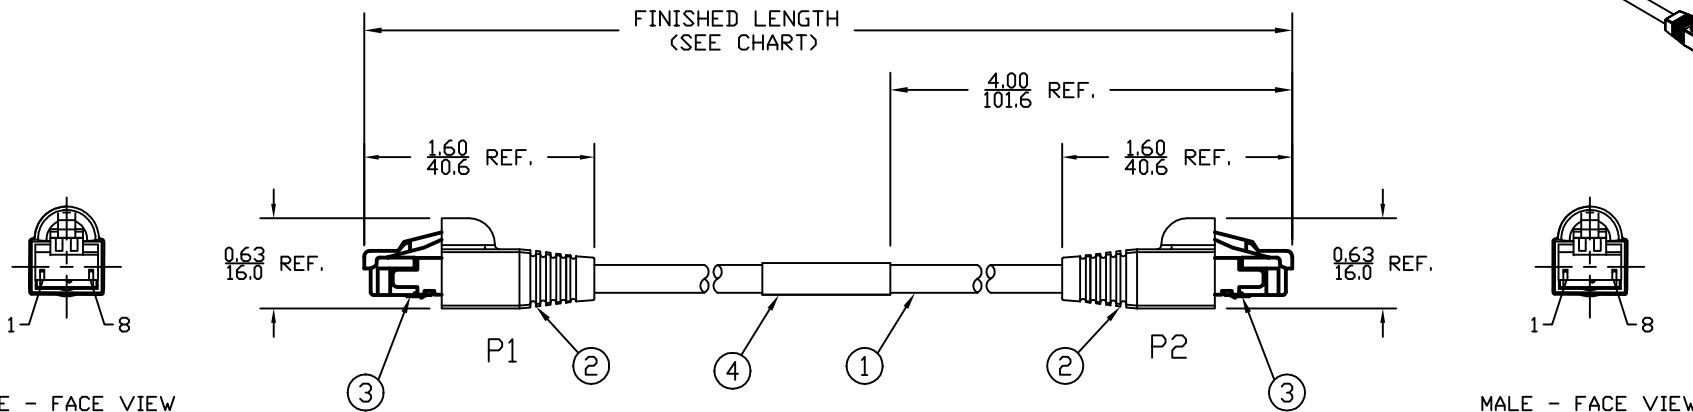

WIRING DIAGRAM

- NOTES:
- 1) MATERIAL: SEE TABLE
 - 2) FINISHES: SEE TABLE
 - 3) CABLE: #26/8 SHIELDED TWISTED PAIR, PUR
 - 4) ELECTRICAL DATA:
ACCORDING TO CAT5e ETHERNET STANDARD
MAX. VOLTAGE: 30V
MAX. CURRENT 1.5A
 - 5) ENVIRONMENTAL:
PROTECTION IP67
TEMPERATURE RANGE: -20°C TO +80°C
 - 6) WRAP LABEL IS MARKED WITH P/N & DATE CODE.
 - 7) ASSEMBLY IS RoHS COMPLIANT.

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
4	1	LABEL	PLASTIC FILM	BLACK/YELLOW
3	2	RJ45 PLUG	POLYCARBONATE	CLEAR
2	2	BOOT	PVC	BLACK
1	1	ETHERNET CABLE-CAT5E	PUR JACKET	BLACK

SD RELEASE EC NO: WNA2010-0016 7/23/09 DRWN: VOU CHKD: BWOODMAN APPR: JFMURPHY 2009/08/10	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
			mm	INCH	IN/MM	3:4		INCH
		4 PLACES	±----	±----	DRAWN BY	DATE		TITLE
		3 PLACES	±----	±.005	VOU	2009/07/15		ETHERNET CABLE ASSY 8P M/M STD/STD 568B #26/8 SHIELDED CABLE
2 PLACES	±----	±.010	CHECKED BY	DATE	MOLEX INCORPORATED DOCUMENT NO. SD-130050-004 SHEET NO. 1 OF 1			
1 PLACE	±----	±.020	BWOODMAN	2009/07/31				
ANGULAR ±1/2°		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART				
SIZE A		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

6

5

4

3

2

1

E

E

D

D

C

C

B

B

A

A