
○ ()	





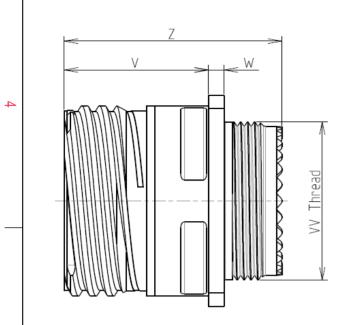

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

nimum

: 11.35 g ± 10%

8D 0

G

11

W

01

Ρ

F

B L

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	20.62			
R2	18.26			
S	26.2±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M15x1-6g			

Delivered W/O Contacts


CONTACT LAYOUT : 11-01

CONTACT TYPE : PIN(500 Matings)

Е

ORIENTATION : B

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

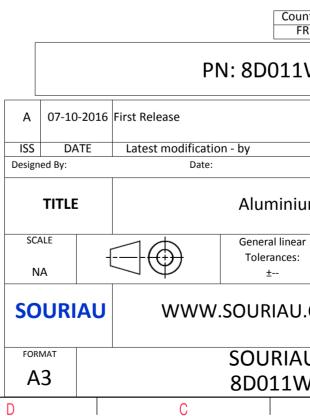

Φ		
		4
IS EXAMPLE		3
any non-conformits which does not co or of the Parties or b adation, technical no intry Jurisd R WO1PBL	mply with by a third party	2
	MOD N°	
um Receptacl		
ar	NPRDS / PROJECT 859	1
I.COM	This document is the property of SOURIAU it must not be reproduced or communicated without permission	
U DRG N° N01PBL-C	SHEET 1/2	
В	A	L

		G	ات	m		0
		Contact Layout				Panel Cutout
4		01			4	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc	1#12 11-01 X Y]		¥ 	
ى ى	A	0 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendation)
2						Country FR PN: 8D011W
					A 07-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
					TITLE SCALE NA	Aluminium General linear Tolerances: ±
					FORMAT	U WWW.SOURIAU.CO
					A3	8D011W0
·	Н	G	F	E	D	C

