


(B1) MATERIAL NUMBER LEGEND

389 XX X X XX

INSULATOR STYLE ——— # OF CIRCUITS
 26 - NO MOUNTING ENDS 02-30 - NO MOUNTING ENDS

TERMINAL STYLE ——— SCREW STYLE
 0 - PC TAILS 0 - M3.5 WITH SQUARE WASHER, STEEL, NICKEL PLATED

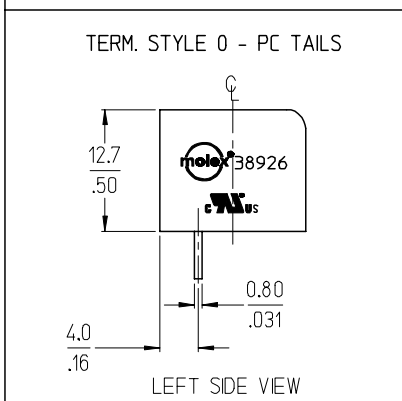


- (B1) NOTES:**
- MATERIAL:
 - SCREW: SEE LEGEND.
 - INSULATOR: PA66, UL94V-0
 - TERMINAL: BRASS, TIN PLATED
 - WIRE SIZE: 26-12 AWG.
 - RATING: 300V, 20A
 - MAX. TORQUE: 7 IN-LB.
 - OPERATING TEMPERATURE: -40°C TO +105°C
 - NUMBER OF CIRCUIT POSITIONS AVAILABLE = SEE LEGEND.
 - ASSEMBLY IS ROHS COMPLIANT.

PRELIMINARY EC NO: ETC2007-0326 DRW: C.YORK 2007/03/20 CHKD: J.MACNEIL 2007/03/21 APPR: J.MACNEIL 2007/03/22	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
	▽=0 ▽=0	mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± .005 2 PLACES ± 0.13 ± .01 1 PLACE ± 0.3 ± --- ANGULAR ± 2 °	MM/IN	2:1	INCH	DRAWN BY: C. YORK DATE: 2006/11/09 CHECKED BY: J. MACNEIL DATE: 2006/11/09 APPROVED BY: J. MACNEIL DATE: 2006/11/09	TITLE	8.26MM [.325] SINGLE ROW TRI-BARRIER TERM. STRIP, NO MTG, W/ STEEL SCREWS
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE LEGEND	MATERIAL NO.	DOCUMENT NO.	SHEET NO.		MOLEX INCORPORATED SD-38926-001 1 OF 2	
	SIZE B THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

(B1)

QUANTITY OF CIRCUITS	DIM. "A"		DIM. "B"	
	mm	in	mm	in
02	17.7	.70	8.26	.325
03	26.0	1.02	16.51	.650
04	34.2	1.35	24.77	.975
05	42.5	1.67	33.02	1.300
06	50.7	2.00	41.28	1.625
07	59.0	2.32	49.53	1.950
08	67.2	2.65	57.79	2.275
09	75.5	2.97	66.04	2.600
10	83.8	3.30	74.30	2.925
11	92.0	3.62	82.55	3.250
12	100.3	3.95	90.81	3.575
13	108.5	4.27	99.06	3.900
14	116.8	4.60	107.32	4.225
15	125.0	4.92	115.57	4.550
16	133.3	5.25	123.83	4.875
17	141.5	5.57	132.08	5.200
18	149.8	5.90	140.34	5.525
19	158.0	6.22	148.59	5.850
20	166.3	6.55	156.85	6.175
21	174.6	6.87	165.10	6.500
22	182.8	7.20	173.36	6.825
23	191.1	7.52	181.61	7.150
24	199.3	7.85	189.87	7.475
25	207.6	8.17	198.12	7.800
26	215.8	8.50	206.38	8.125
27	224.1	8.82	214.63	8.450
28	232.3	9.15	222.89	8.775
29	240.6	9.47	231.14	9.100
30	248.9	9.80	239.40	9.425

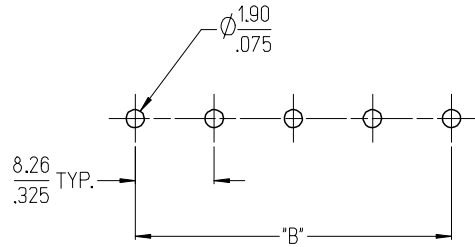

RECOMMENDED PCB LAYOUT

SEE SHEET 1 EC NO: ETC2007-0326 DRWN: CLYORK 2007/03/20 CHKD: JMACNEIL 2007/03/21 APPR: JMACNEIL 2007/03/22	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
		REV B1	DESCRIPTION	mm	INCH	MM/IN	2:1	INCH	
				4 PLACES ± --- ± ---	C. YORK 2006/11/09	TITLE 8.26MM [.325] SINGLE ROW TRI-BARRIER TERM. STRIP, NO MTG, W/ STEEL SCREWS			
				3 PLACES ± --- ± .005	CHECKED BY J. MACNEIL 2006/11/09				
2 PLACES ± 0.13 ± .01	APPROVED BY J. MACNEIL 2006/11/09								
		1 PLACE ± 0.3 ± ---	ANGULAR ± 2 °	MATERIAL NO.	DOCUMENT NO.	SHEET NO.			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE LEGEND		SD-38926-001		2 OF 2		
			SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				