

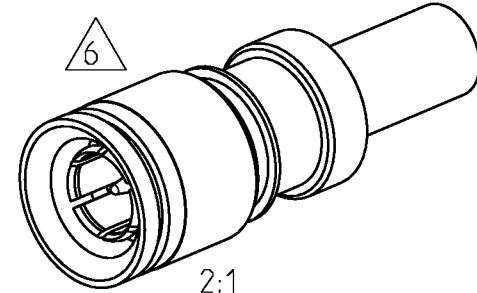
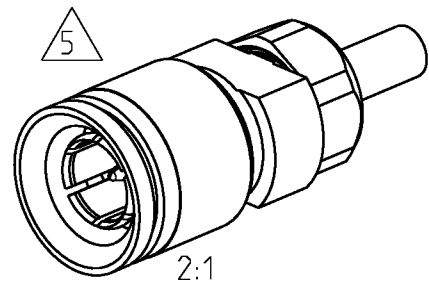
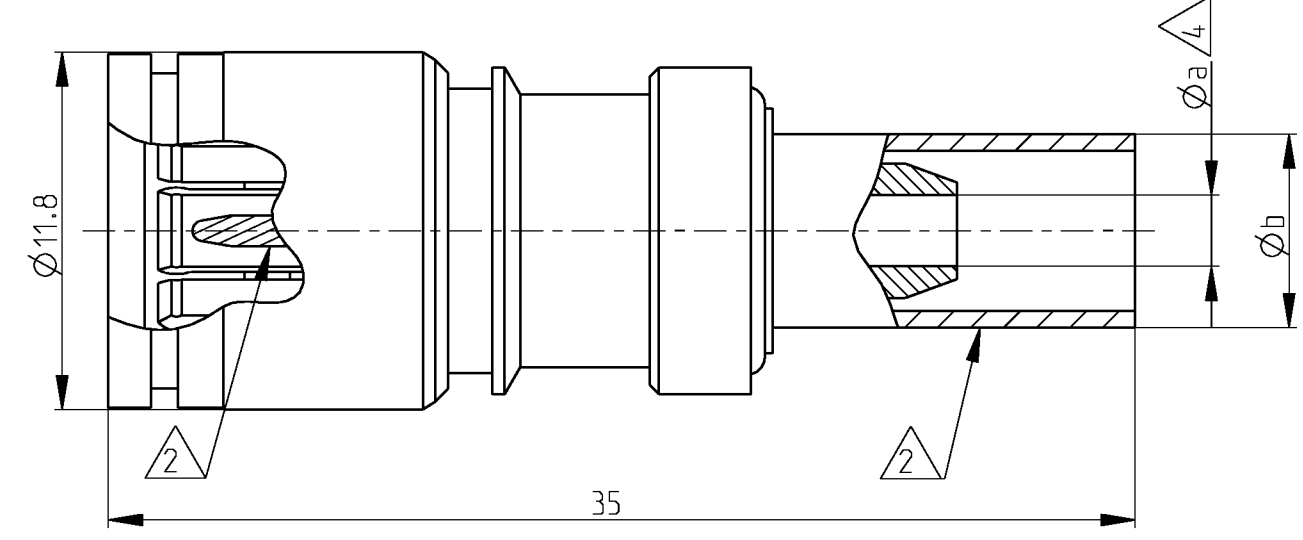
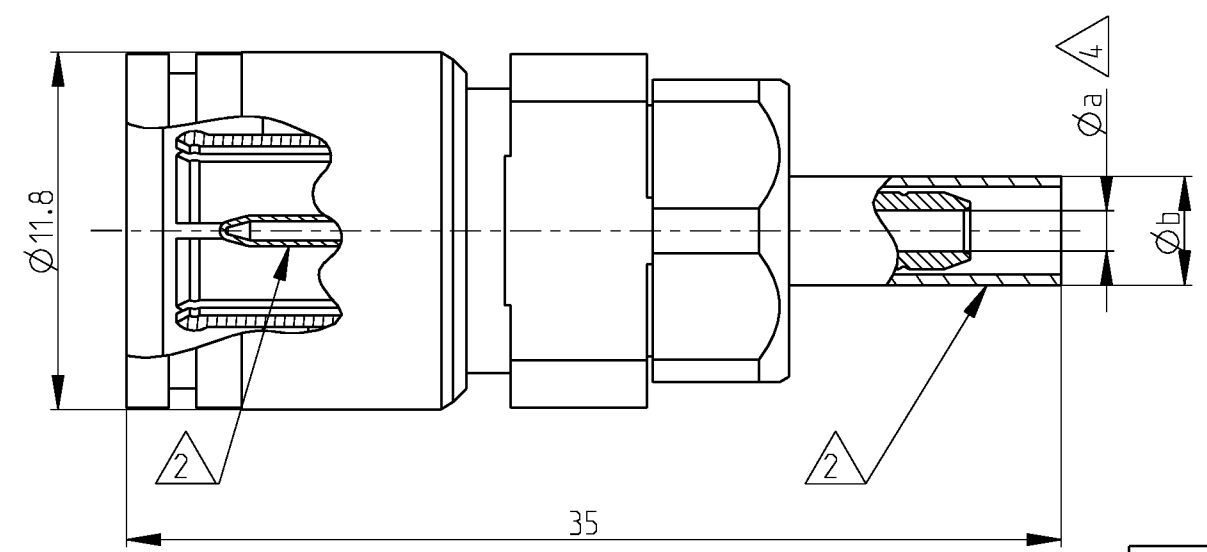









THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2000
 © COPYRIGHT 2000 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
GW	-	A	-	5APR2001	BL KM
		A1	PN added + Applic. spec. in table + pack. info	27JUN2003	FH RL
		B	overall connector length corrected	17JUN2004	FH RL
		B1	REV PER ECO-09-026495	30NOV09	KK AEG


Connector layout 

Connector layout 




-  OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
-  Bulk packaging.
-  Tray packaging.
-  Individual packaging.
-  Pre-assembled version.
-  Version with loose parts.
-  Minimum dimension.














3) Mating face according to DIN 47295/CECC 22240.

 Supplied as loose part.

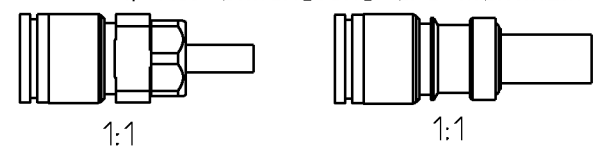

1) All dimensions are maximum dimensions unless otherwise specified.



Cross reference table

Old PN	Tyco PN	Application spec.	Description	Material	Plating	Cable type	Øa	Øb
-	1460043-4	114-71021	Outer cond.	CuBe	1µm Au min in contact area	02Y (St) CY 0.45/2.0	2.15	5.2
	  		Center cond.	CuSn6	1µm Au min in contact area			
			Dielectric	PEEK	-			
V23612-B102-P76	1393672-9	114-71021	Outer cond.	CuBe	1µm Au min in contact area	02Y (St) CY 0.45/2.0	2.15	5.2
	 		Center cond.	CuSn6	1µm Au min in contact area			
			Dielectric	PEEK	-			
V23612-A102-P76	1393672-3	114-71019	Outer cond.	CuBe	1µm Au min in contact area	02Y (St) CY 0.45/2.0	2.15	5.2
	 		Center cond.	CuSn6	1µm Au min in contact area			
			Dielectric	PEEK	-			
 OBSOLETE V23612-A102-P62	1393672-2	114-71019	Outer cond.	CuBe	1µm Au min in contact area	02Y 12YC (mS) (6Y 0.45/2.0	2.15	5.2
	 		Center cond.	CuSn6	1µm Au min in contact area			
			Dielectric	PEEK	-			
 OBSOLETE -	1460132-4	114-71019	Outer cond.	CuBe	1µm Au min in contact area	02YS (St) CHH 0.25/1.2 HF 75 0.25/1.15	1.3	3.8
	 		Center cond.	CuSn6	1µm Au min in contact area			
			Dielectric	PEEK	-			

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN 23FEB2001 B. Lenvain		 Tyco Electronics Oostkamp - Belgium			
		0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH see table		CHK 5APR2001 K. Mattheeuws APVD 5APR2001 R. Leeman PRODUCT SPEC APPLICATION SPEC see table WEIGHT -				NAME Straight cable plug 1.6/5.6 (75 ohm)	
MATERIAL see table		FINISH see table		CUSTOMER DRAWING		SIZE A3	CAGE CODE 00779	DRAWING NO ©=1393672-3	RESTRICTED TO -
SCALE 4/1						SHEET 1 OF 1		REV B1	