

TE Internal #: HD10-5-GKT


Automotive Seals & Cavity Plugs, Gasket, Closed Cell Sponge,

Black, 5 Position, -70 – 225 °F [-57 – 107 °C]

View on TE.com >



Connectors > Automotive Connectors > Automotive Seals & Cavity Plugs

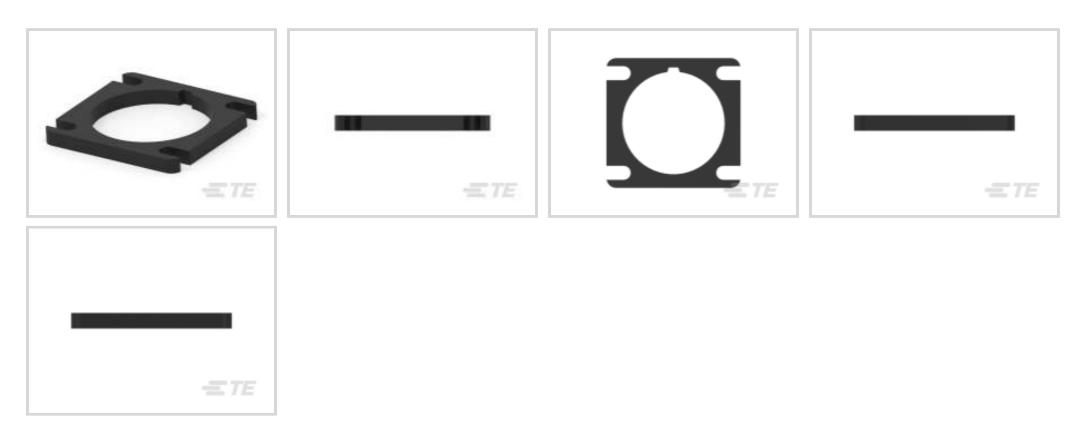

Connector Seal & Plug Type: Gasket

Primary Product Material: Closed Cell Sponge

Operating Temperature (Max): 107 °C [ 225 °F ]

Contains Lubricant: **No**Primary Product Color: **Black** 

### **Features**

### **Product Type Features**

Connector Seal & Plug Type	Gasket
Configuration Features	
Number of Positions	5
Body Features	
Primary Product Material	Closed Cell Sponge
Primary Product Color	Black
Usage Conditions	
Operating Temperature (Max)	107 °C[225 °F]
Operating Temperature Range	-57 - 107 °C[-70 - 225 °F]
Industry Standards	
UL Flammability Rating	UL 94HBF
Packaging Features	
Packaging Method	Box
Other	



Contains Lubricant	No	

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**



# Customers Also Bought





TE Part #DRC12-40PB REC, 40P, BLK, N, FLANGE, B




TE Part #HDP26-24-18SN PLG, 18P, BLK, N, 8/12/16, S




TE Part #0460-220-1231 PIN, SOLID, SIZE 12,12-14AWG, AU



TE Part #1011-345-0305 DUST CAP, 3P, PLG, BLK, DT



TE Part #1924487-2 MOUNTING CLIP, AMPSEAL 16




TE Part #890113-000 \$1048-TAPE-1X100-FT

BSTS-35X4FR



TE Part #HD10-3-GKT GASKET, 3SZ, BLK, HD10





TE Part #321582
TERMINAL,SOLIS FLAG R 2/0 5/16



### **Documents**

**Product Drawings** 

GASKET, 5SZ, BLK, HD10

English

### **CAD Files**

**Customer View Model** 

ENG\_CVM\_CVM\_HD10-5-GKT\_A.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_HD10-5-GKT\_A.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_HD10-5-GKT\_A.3d\_stp.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

Automotive Seals & Cavity Plugs, Gasket, Closed Cell Sponge, Black, 5 Position, -70 – 225 °F [-57 – 107 °C]



### **CONNECTOR SELECTOR**

English

**Product Specifications** 

**Application Specification** 

English