
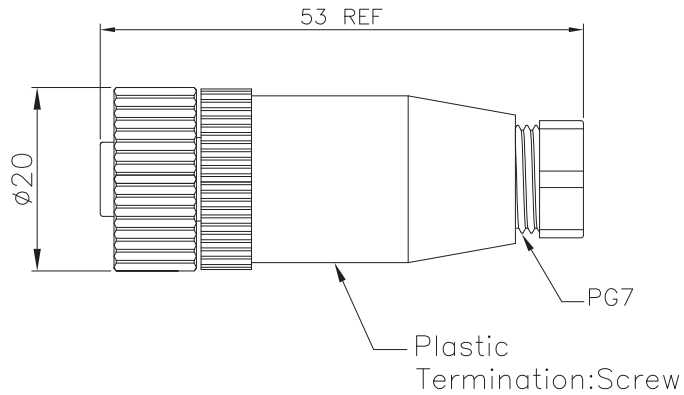


RoHS Compliant


Specifications:
 Current Rating:4A
 Voltage Rating:250V AC/DC
 Contact Resistance:10m ohm. Max.
 Insulation Resistance:100M ohm. Min.
 Operating Temperature Range:-25°C ~ +85°C
 Material and Finish
 Insulator:Nylon (UL94V-0)
 Contact:Brass,Gold Plated
 Coupling Screw:Brass,Nickel Plated
 Outer Shell:Nylon Black
 Mechanical Performance
 Waterproof Rate:IP67
 Application Cable OD:4~6mm
 How to Order

M12-XXS-A-AE4


Assembly Screw Type
 A Code
 Socket
 No of Positions(4~5)
 M12





Pin Assignments Front View



4Pin



5Pin

F				DRAWN: Joy Liu	GENERAL TOLERANCE: .X=±0.30 .XX=±0.25	 ON-SHORE TECHNOLOGY, INC.
E						
D				CHECKED: Andrew	UNIT: MM	DESCRIPTION: M12 SOCKET A CODE STRAIGHT ASSEMBLY SCREW TYPE
C					SCALE: 1:1	
B				APPROVAL: Bill He	SHEET: 1/1	PART NO: M12-XXS-A-AE4
A	14-Feb-2020		Joy Liu		PROJECTION: 	
REV	DATE	FILE	BY			

A

B

C

D