

ITEM	PART#	DESCRIPTION	QTY	UOM
A, B	511100660	6CKT CRIMP REC HOU WITH LOCKING FEATURE	2	PC
C	503948055	2mm MGrid WTB Crimp Term PhBr 2.5Sn	12	PC
D	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	B5	1X24AWG DISC SR-PVC BK UL10002	BLACK
A2	B6	1X24AWG DISC SR-PVC BK UL10002	BLACK
A3	B3	1X24AWG DISC SR-PVC BK UL10002	BLACK
A4	B4	1X24AWG DISC SR-PVC BK UL10002	BLACK
A5	B1	1X24AWG DISC SR-PVC BK UL10002	BLACK
A6	B2	1X24AWG DISC SR-PVC BK UL10002	BLACK

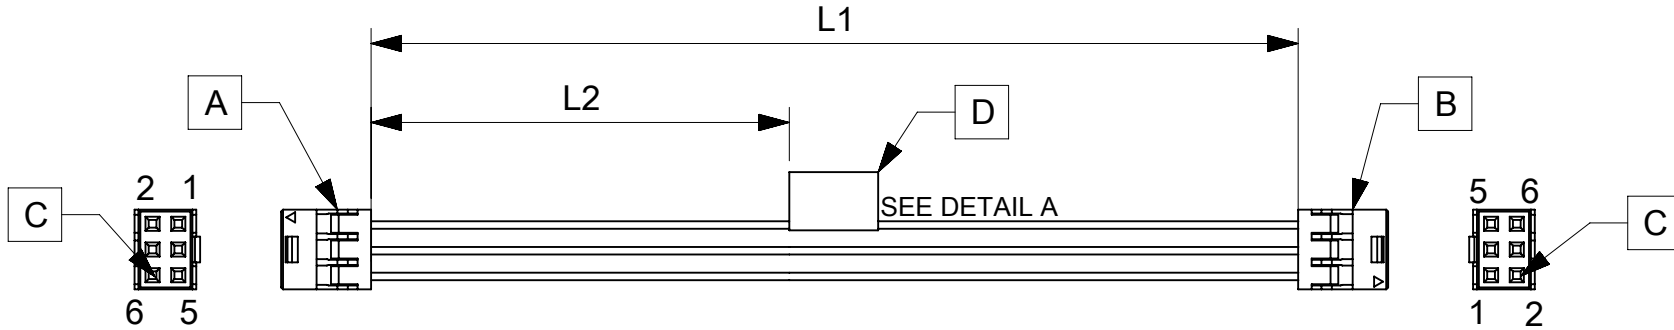


TABLE			
PART NUMBER	L1	L2 (REF)	TITLE
2185091060	50±3	13	MILLI-GRID DR R-R 6CKT 50MM DISC Sn
2185091061	100±5	38	MILLI-GRID DR R-R 6CKT 100MM DISC Sn
2185091062	150±8	63	MILLI-GRID DR R-R 6CKT 150MM DISC Sn
2185091063	300±10	138	MILLI-GRID DR R-R 6CKT 300MM DISC Sn
2185091064	600±10	288	MILLI-GRID DR R-R 6CKT 600MM DISC Sn

NOTES

1. Cable assembly must pass 100% for continuity and polarity.
2. Connector view shown is from mating side.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
31/05/2021	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\frac{E}{A} = 0$ $\frac{E}{E} = 0$ $\frac{E}{P} = 0$ DIVISIONAL SYMBOLS	DIMENSION UNITS: mm SCALE: NTS		CURRENT REV DESC:				
	GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 665608 DRWN: ARAJU 2021/05/31 CHK'D: RDESAI01 2021/05/31 APPR: RDESAI01 2021/05/31			SEE TABLE	
	ANGULAR TOL ± °		INITIAL REVISION:				PRODUCT CUSTOMER DRAWING
	4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±		DRWN: ARAJU 2021/05/31 APPR: RDESAI01 2021/05/31			DOCUMENT NUMBER 2185091060	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING: A4-SIZE	SERIES: 218509	MATERIAL NUMBER: SEE TABLE		CUSTOMER: GENERAL MARKET